



Typical Performance Curves


GAIN vs. TEMPERATURE

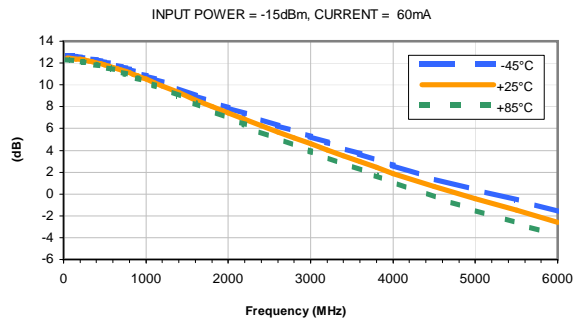


GAIN vs. CURRENT

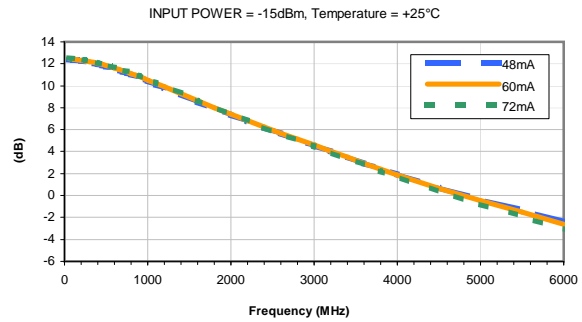


ISOLATION vs. TEMPERATURE

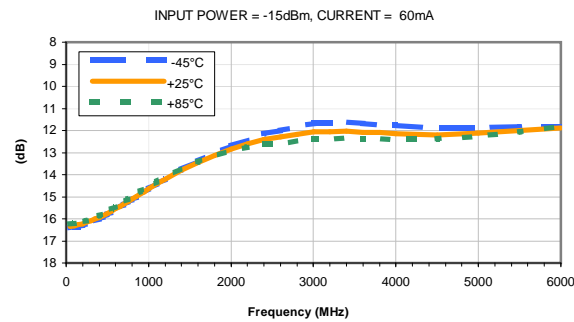


ISOLATION vs. CURRENT

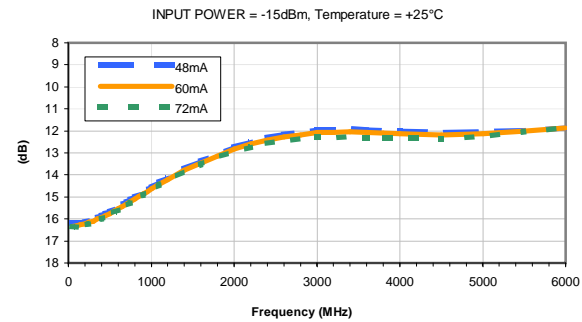


INPUT RETURN LOSS vs. TEMPERATURE

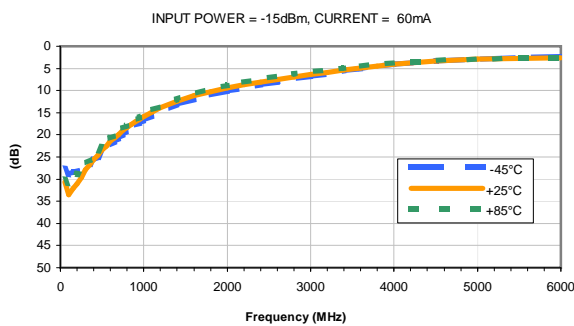


INPUT RETURN LOSS vs. CURRENT

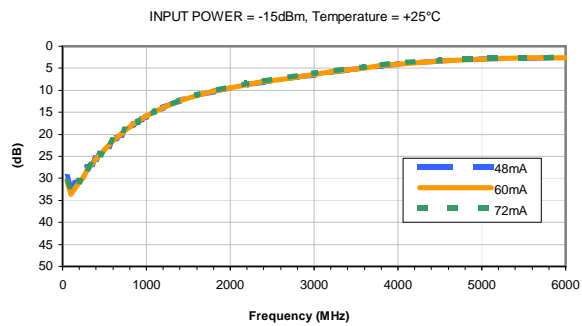

OUTPUT RETURN LOSS vs. TEMPERATURE

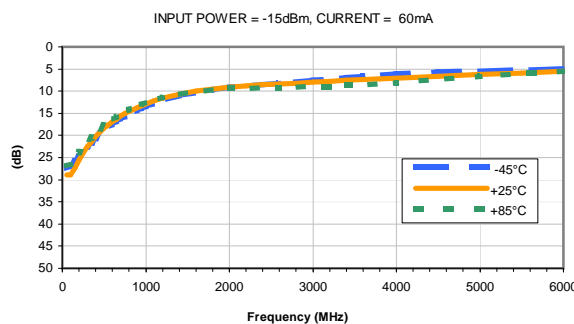


OUTPUT RETURN LOSS vs. CURRENT

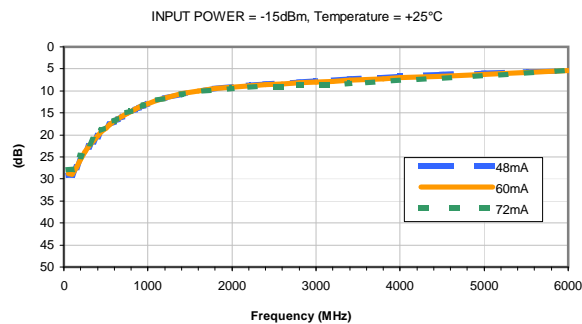

Typical Performance Curves


OUTPUT IP-3 vs. TEMPERATURE

INPUT POWER = -15dBm, CURRENT = 60mA

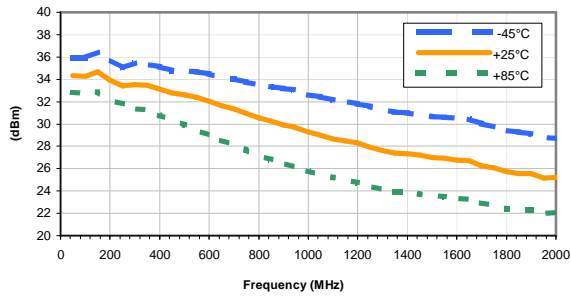


OUTPUT IP-3 vs. CURRENT

INPUT POWER = -15dBm, Temperature = +25°C

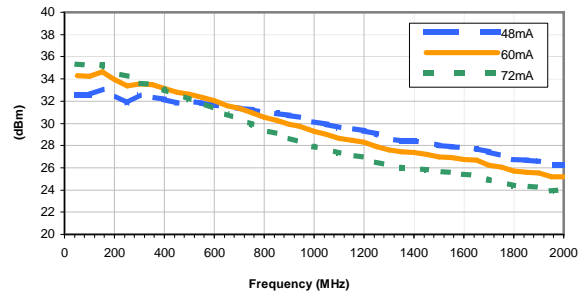


OUTPUT POWER at 1dB Compression vs. TEMPERATURE

CURRENT = 60mA

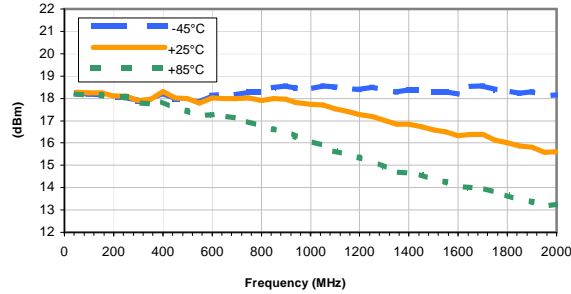


OUTPUT POWER at 1dB Compression vs. CURRENT

Temperature = +25°C

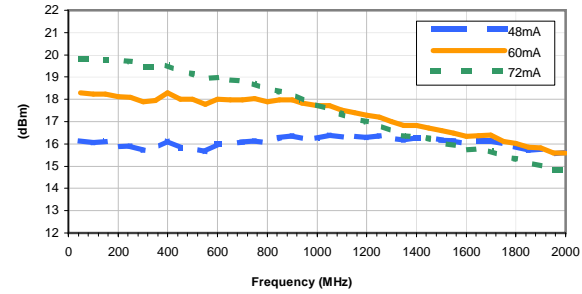

Noise Figure vs. TEMPERATURE

CURRENT = 60mA

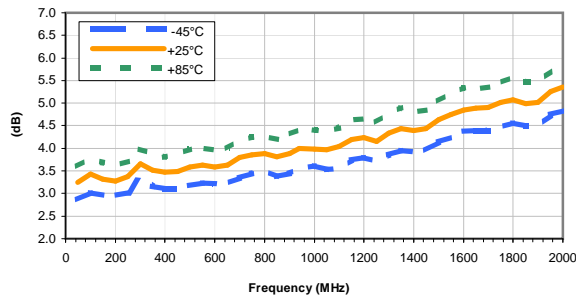

Noise Figure vs. CURRENT

Temperature = +25°C

