



HAND FLEX™

Coaxial Cable

086-15KM+

Mini-Circuits

50Ω 15 inch DC to 40 GHz 2.92mm-Male

THE BIG DEAL

- Wideband frequency coverage, DC to 40 GHz
- Low Loss, 2.4 dB typ. at 40 GHz
- Excellent Return Loss, 31 dB typ. at 40 GHz
- Hand formable to almost any custom shape without special bending tools
- 6mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

| | |
|------------|-------------|
| Model No. | 086-18KM+ |
| Case Style | RQ2535-15 |
| Connectors | 2.92mm-Male |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

PRODUCT OVERVIEW

The 086 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a gold-plated beryllium copper center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body.

KEY FEATURES

| Feature | Advantages |
|---|---|
| Hand-Formable RF Cables | The 086 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies. |
| Tight Bend Radius | Capable of only 6mm bend radius, the 086 Hand Flex series is able to make connections in tight spaces making these cables ideal for dense system integration |
| Excellent Return Loss: <ul style="list-style-type: none"> • 24 dB typ. to 18 GHz • 31 dB typ. to 40 GHz | The 086 Series Hand-Flex™ Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors. |
| Good Power Handling Capability: <ul style="list-style-type: none"> • 61W at 1 GHz • 7W at 40 GHz | Mini-Circuits 086 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes. |
| Built-in Anti-torque nut | Mini-Circuits 086 Series Hand Flex cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface. |





Coaxial Cable

086-15KM+

50Ω 15 inch DC to 40 GHz 2.92mm-Male

ELECTRICAL SPECIFICATIONS AT +25°C

| Parameter | Frequency (GHz) | Min. | Typ. | Max. | Units |
|-----------------|-----------------|------|------|------|--------|
| Frequency Range | | DC | | 40 | GHz |
| Length | | 15 | | | inches |
| Insertion Loss | DC - 6 | — | 0.5 | 1.1 | dB |
| | 6 - 18 | — | 1.1 | 1.9 | |
| | 18 - 26.5 | — | 1.6 | 2.3 | |
| | 26.5 - 40 | — | 2.2 | 3.0 | |
| Return Loss | DC - 18 | 18 | 31 | — | dB |
| | 18 - 40 | 15 | 27 | — | |

ABSOLUTE MAXIMUM RATINGS

| Parameter | Ratings |
|------------------------------------|----------------|
| Operating Temperature | -55°C to +85°C |
| Storage Temperature | -55°C to +85°C |
| Power Handling at +25°C, Sea Level | 61W at 1 GHz |
| | 24W at 6 GHz |
| | 16W at 12 GHz |
| | 12W at 18 GHz |
| | 9W at 26.5 GHz |
| | 7W at 1 GHz |

Permanent damage may occur if any of these limits are exceeded.



HAND FLEX™


Coaxial Cable

086-15KM+

Mini-Circuits


50Ω 15 inch DC to 40 GHz 2.92mm-Male

CABLE CONSTRUCTION

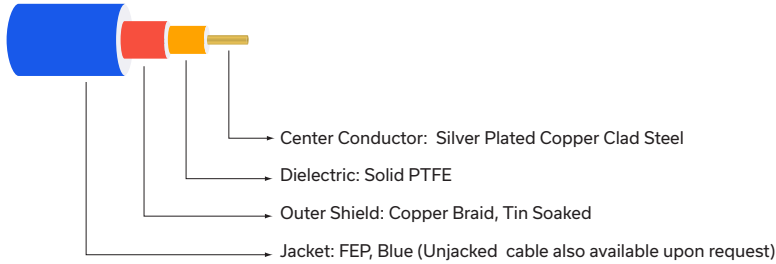

Connectors: Coupling Nut: Brass, Nickel Plated
 Body: Brass, Nickel Plated
 Center Pin: Brass, Gold Plated

OUTLINE DRAWING

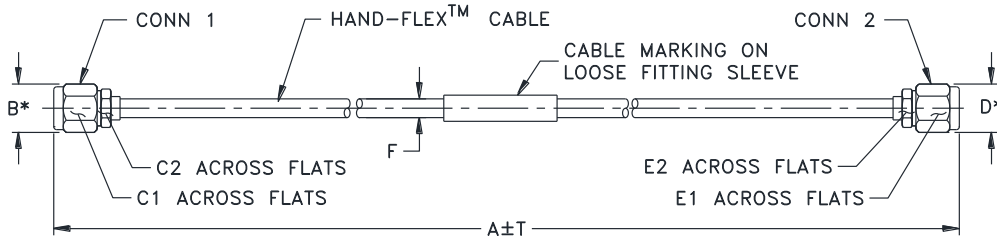

* OVERALL CONNECTOR OR CABLE & BOOT DIM.
 [CONNECTOR SHAPE MAY VARY]

OUTLINE DIMENSIONS (Inch/mm)

| A | B | C1 | C2 | D | E1 | E2 | F | T | wt |
|--------|------|------|------|------|------|------|------|------|-------|
| 15.0 | .36 | .315 | .250 | .36 | .315 | .250 | .104 | .15 | grams |
| 381.00 | 9.14 | 8.00 | 6.35 | 9.14 | 8.00 | 6.35 | 2.64 | 3.81 | 16.21 |





HAND FLEX™

Coaxial Cable



086-15KM+

Mini-Circuits

50Ω 15 inch DC to 40 GHz 2.92mm-Male

TYPICAL PERFORMANCE DATA AND CHARTS

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) | |
|-----------------|---------------------|------------------|--------------|
| | | 2.92 mm-Male | 2.92 mm-Male |
| 100 | 0.09 | 41.91 | 41.64 |
| 2000 | 0.43 | 45.29 | 41.30 |
| 4000 | 0.61 | 39.79 | 35.99 |
| 6000 | 0.75 | 29.60 | 27.10 |
| 10000 | 0.98 | 27.60 | 26.76 |
| 15000 | 1.19 | 28.21 | 26.32 |
| 18000 | 1.36 | 30.02 | 24.53 |
| 20000 | 1.47 | 33.00 | 29.17 |
| 26500 | 1.83 | 23.78 | 22.58 |
| 28000 | 1.92 | 30.97 | 25.43 |
| 30000 | 2.00 | 24.12 | 22.82 |
| 32000 | 2.15 | 25.91 | 24.48 |
| 36000 | 2.27 | 25.94 | 27.62 |
| 38000 | 2.37 | 28.58 | 34.24 |
| 40000 | 2.44 | 31.18 | 38.13 |

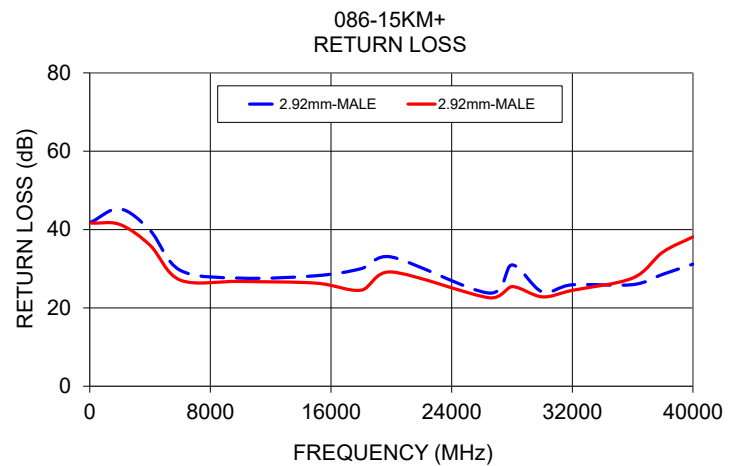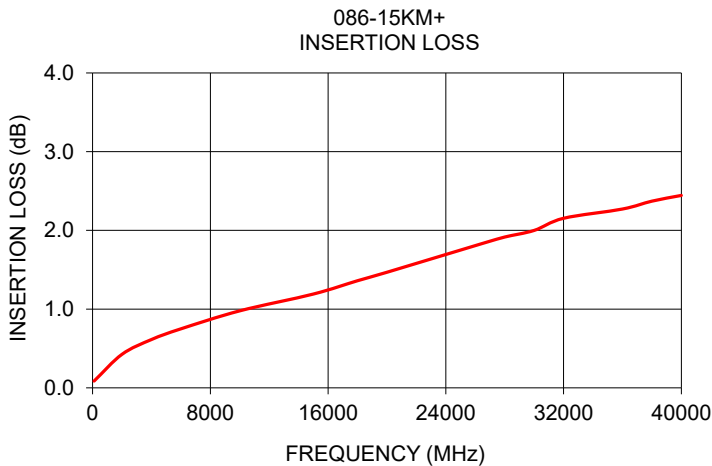




PROPER CABLE CONNECTION USING ANTI-TORQUE NUT

Mini-Circuits 086-series HandFlex™ interconnect cables are constructed with an anti-torque nut adjacent to the connector coupling nut. When used properly, this feature prevents possible damage to the cable due to torquing and twisting when tightening the cable connector.


TO PROPERLY TIGHTEN THE CABLE CONNECTOR:

1) The cable connector includes a coupling nut which rotates to fasten the connector, and an anti-torque nut, which is fixed to prevent the cable from twisting during connection.

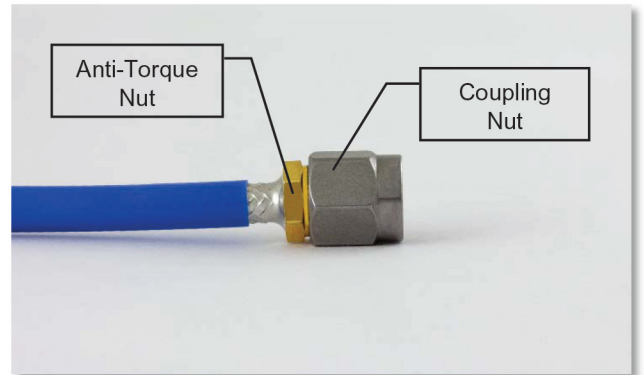

2) To properly tighten the cable, use a standard 1/4-inch open end wrench to brace the anti-torque nut.

3) Using a 5/16-inch open end wrench, rotate the coupling nut clockwise to tighten the cable connector.

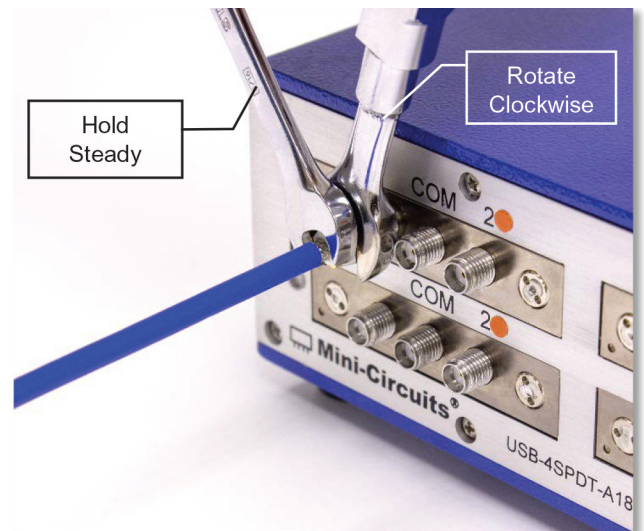

*NOTE: Mini-Circuits recommends using a 5/16-inch open end wrench calibrated to 8 inch-pounds maximum torque to prevent damage due to over-torquing the connector.

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Typical Performance Data

| FREQUENCY (MHz) | INSERTION LOSS (dB) | 2.92mm-MALE 1 RETURN LOSS (dB) | 2.92mm-MALE 2 RETURN LOSS (dB) |
|--------------------|------------------------|--------------------------------------|--------------------------------------|
| 10 | 0.05 | 46.33 | 46.04 |
| 50 | 0.06 | 44.31 | 44.14 |
| 100 | 0.09 | 41.91 | 41.64 |
| 500 | 0.22 | 41.91 | 42.11 |
| 1000 | 0.30 | 39.21 | 39.04 |
| 1500 | 0.37 | 40.77 | 43.20 |
| 2000 | 0.43 | 45.29 | 41.30 |
| 2500 | 0.48 | 35.39 | 35.63 |
| 3000 | 0.53 | 35.29 | 35.18 |
| 3500 | 0.57 | 39.05 | 39.36 |
| 4000 | 0.61 | 39.79 | 35.99 |
| 4500 | 0.65 | 32.48 | 31.73 |
| 5000 | 0.69 | 35.25 | 34.63 |
| 5500 | 0.74 | 36.08 | 36.41 |
| 6000 | 0.75 | 29.60 | 27.10 |
| 6500 | 0.78 | 30.32 | 30.21 |
| 7000 | 0.81 | 34.86 | 33.02 |
| 7500 | 0.84 | 28.42 | 27.18 |
| 8000 | 0.88 | 26.22 | 24.65 |
| 8500 | 0.90 | 32.64 | 31.32 |
| 9000 | 0.92 | 30.65 | 27.03 |
| 9500 | 0.96 | 25.37 | 23.99 |
| 10000 | 0.98 | 27.60 | 26.76 |
| 10500 | 0.99 | 31.60 | 28.58 |
| 11000 | 1.01 | 29.25 | 23.51 |
| 11500 | 1.03 | 25.93 | 24.29 |
| 12000 | 1.06 | 29.66 | 27.85 |
| 12500 | 1.07 | 30.34 | 28.20 |
| 13000 | 1.10 | 26.81 | 22.92 |
| 13500 | 1.11 | 28.47 | 28.04 |
| 14000 | 1.16 | 35.11 | 29.34 |
| 14500 | 1.20 | 29.25 | 24.53 |
| 15000 | 1.19 | 28.21 | 26.32 |
| 15500 | 1.23 | 33.09 | 29.34 |
| 16000 | 1.23 | 34.81 | 30.99 |
| 16500 | 1.31 | 26.48 | 24.37 |
| 17000 | 1.33 | 32.23 | 29.33 |
| 17500 | 1.34 | 31.22 | 36.46 |
| 18000 | 1.36 | 30.02 | 24.53 |
| 18500 | 1.38 | 28.18 | 27.15 |
| 19000 | 1.44 | 34.53 | 30.33 |
| 19500 | 1.48 | 31.67 | 25.86 |
| 20000 | 1.47 | 33.00 | 29.17 |
| 21000 | 1.57 | 29.11 | 26.64 |
| 22000 | 1.58 | 29.38 | 27.61 |
| 23000 | 1.63 | 27.36 | 26.41 |
| 24000 | 1.75 | 25.66 | 24.64 |
| 25000 | 1.69 | 25.80 | 23.68 |
| 26000 | 1.83 | 26.94 | 26.50 |
| 27000 | 1.86 | 24.27 | 25.00 |
| 28000 | 1.92 | 30.97 | 25.43 |
| 29000 | 1.90 | 26.96 | 29.69 |
| 30000 | 2.00 | 24.12 | 22.82 |
| 31000 | 1.94 | 28.16 | 24.33 |
| 32000 | 2.15 | 25.91 | 24.48 |
| 33000 | 2.16 | 28.20 | 23.72 |
| 34000 | 2.15 | 30.82 | 25.27 |
| 35000 | 2.21 | 30.71 | 30.57 |
| 36000 | 2.27 | 25.94 | 27.62 |
| 37000 | 2.30 | 37.96 | 38.00 |
| 38000 | 2.37 | 28.58 | 34.24 |
| 39000 | 2.36 | 40.40 | 33.38 |
| 40000 | 2.44 | 31.18 | 38.13 |





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
 The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com



IF/RF MICROWAVE COMPONENTS

REV. OR
 086-15KM+
 7/27/2018
 Page 1 of 1

Typical Performance Curves

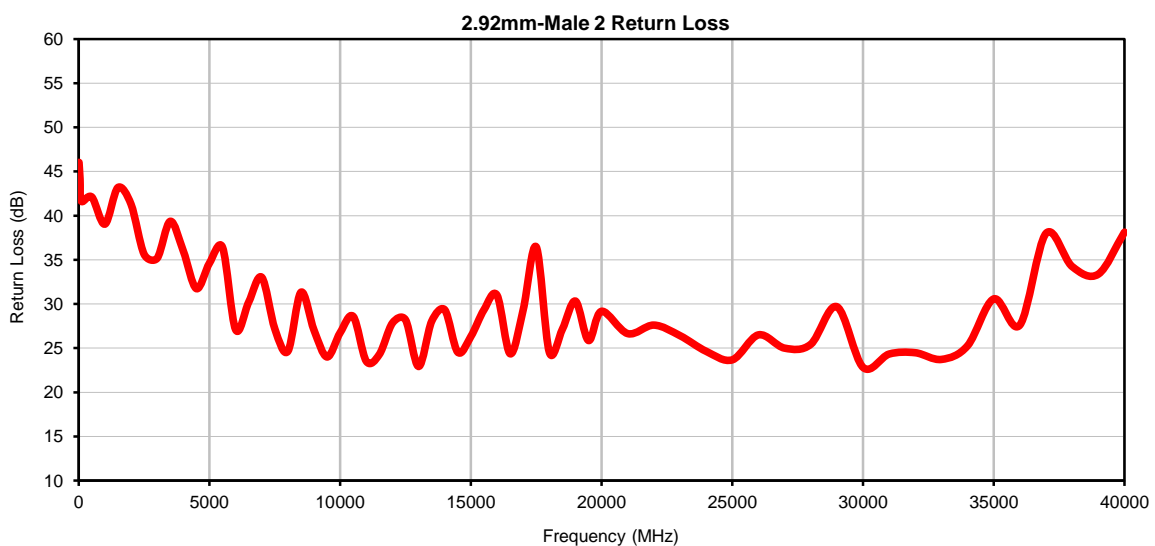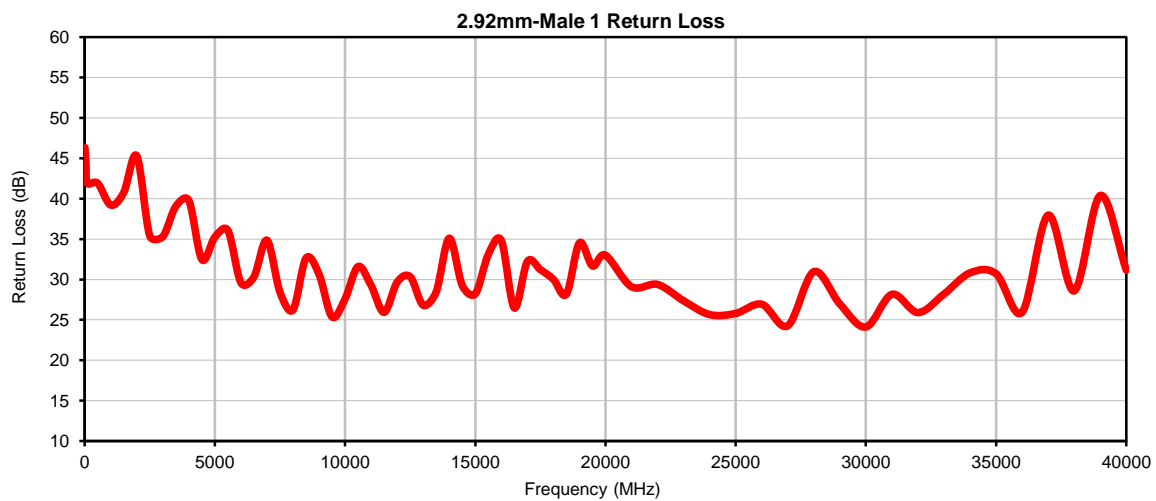


Case Style

RQ

RQ2535

Outline Dimensions

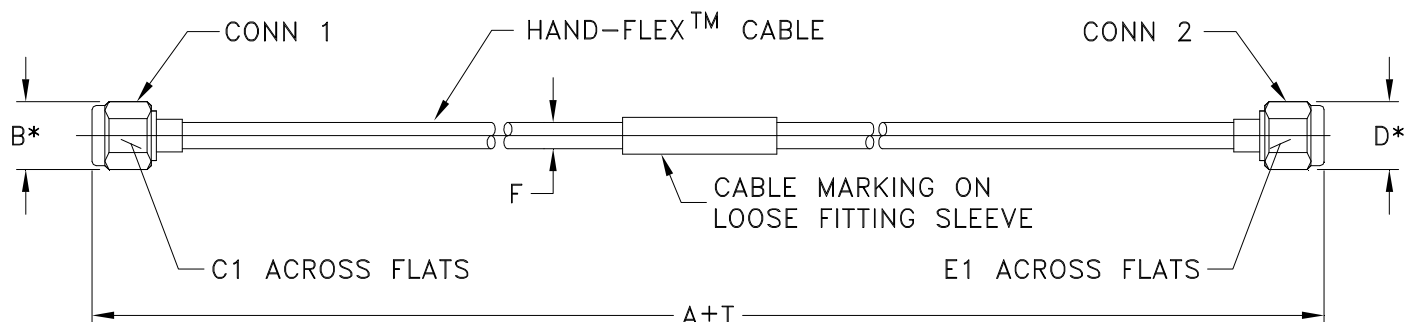

*OVERALL CONNECTOR OR CABLE & BOOT DIM
[CONNECTOR SHAPE MAY VARY]

RQ2535 SERIES

2.92mm MALE (CONN-1)

2.92mm MALE (CONN-2)

| CASE STYLE # | A | | B | C1 | C2 | D | E1 | E2 | F | T | | WEIGHT GRAMS |
|--------------|-------|--------|---------------|----------------|----|---------------|----------------|----|----------------|----------|------|--------------|
| | INCH | MM | | | | | | | | 086-AKM+ | INCH | |
| RQ2535-3 | 3.00 | 76.20 | .36 (9.14) | .315 (8.00) | -- | .36 (9.14) | .315 (8.00) | -- | .104 (2.65) | .08 | 2.00 | 9.64 |
| RQ2535-4 | 4.00 | 101.60 | | | | | | | | .08 | 2.00 | 10.19 |
| RQ2535-6 | 6.00 | 152.40 | | | | | | | | .08 | 2.00 | 11.28 |
| RQ2535-9 | 9.00 | 228.60 | | | | | | | | .08 | 2.00 | 12.92 |
| RQ2535-12 | 12.00 | 304.80 | | | | | | | | .08 | 2.00 | 14.56 |
| RQ2535-15 | 15.00 | 381.00 | | | | | | | | .15 | 3.81 | 16.21 |
| RQ2535-18 | 18.00 | 457.20 | | | | | | | | .15 | 3.81 | 17.85 |
| RQ2535-24 | 24.00 | 609.60 | | | | | | | | .15 | 3.81 | 21.13 |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. 086 Hand-Flex™ Coaxial Cable.
2. "A" Represents Length of Cable.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|-----------------------|--|-----------------------------|
| Operating Temperature | -55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment | Individual Model Data sheet |
| Storage Temperature | -55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment | Individual Model Data Sheet |
| Thermal Shock | -55° to 100°C, 100 Cycles | MIL-STD-202F; Method 107G |
| Multiple Bend Radius | 40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables | |
| Single Bend Radius | 8 mm for 141 series cables 6 mm for 086 series cables | |