



Mini-Circuits

USB & ETHERNET

16-Port Mesh Network Emulator ZTMN-1695A-S

50Ω 30 to 3000 MHz Rack-Mount SMA Female

THE BIG DEAL

- 16 fully interconnected test ports
- Single rack-mountable chassis, 5U height
- 90 dB programmable attenuation per path
- Configure automated sweep / hop / fading sequences
- Ethernet & USB control



Generic photo used for illustration purposes only

APPLICATIONS

- Military VHF / UHF radio testing
- Production, R&D, qualification testing
- ISM band fire & security monitoring
- Test & measurement systems

PRODUCT OVERVIEW

Mini-Circuits' ZTMN series mesh network emulators are multi-port test systems with independently variable attenuation on each internal path. This concept allows simulation of a "real-world" mesh communication network within the confined space of a production environment. Path loss can be varied independently between any pair of devices on the network without affecting any other combination of devices, allowing simulation of a complex range of test cases.

ZTMN-1695A-S is a 16-port mesh covering the 30 MHz to 3 GHz bands, with 0 to 90 dB attenuation range on each of the internal paths. Mini-Circuits' novel design approach significantly shrinks the rack cabinet space required for a 16-port mesh, integrating the complete system with 120 internal paths into a 5U height, 19-inch rack chassis, with all RF connectors on the front panel. The ZTMN series also supports custom mesh network combinations, with port counts, attenuation and frequency ranges configured according to your needs.

The system can be controlled via USB or Ethernet (supporting SSH, HTTP & Telnet protocols). Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32-bit and 64-bit systems).

KEY FEATURES

Feature	Advantages
Wide attenuation range	Independently controllable 0-90 dB attenuators on each path allow simulation of a wide range of test scenarios including receiver sensitivity, device / base-station handovers, device failures, and interference effects.
Wide bandwidth	Operation from 30 MHz to 3 GHz incorporates the VHF / UHF bands utilized by a wide range of military radio systems.
Single rack-mount chassis	5U height, 19" rack-mountable chassis minimizes the rack space required in crowded production test environments.
Ethernet & USB control	USB HID and Ethernet (SSH / HTTP / Telnet) interfaces ensure compatibility with most software environments and connection requirements.




**ELECTRICAL SPECIFICATIONS @ +25°C**

Parameter	Conditions	Min.	Typ.	Max.	Units
Frequency Range		30		3000	MHz
Insertion Loss ¹	30-1800 MHz		37	40	dB
	1800-3000 MHz		42	45	
Isolation	Direct path (30-3000 MHz) ²		110		dB
	Leakage path (30-3000 MHz) ³		70		
Return Loss			8		dB
Input Power	Per port			+25	dBm
Attenuation Range	Per Path	0		90	dB
Attenuation Steps	0 – 90 dB Range		0.25		dB

1. Path loss on the direct path between 2 ports when the attenuator in path is at 0 dB

2. Path loss on the direct path between 2 ports with all attenuators at max attenuation

3. Path loss on the leakage path between 2 ports with the 2 attenuators in the leakage path at 0 dB and all others at max attenuation

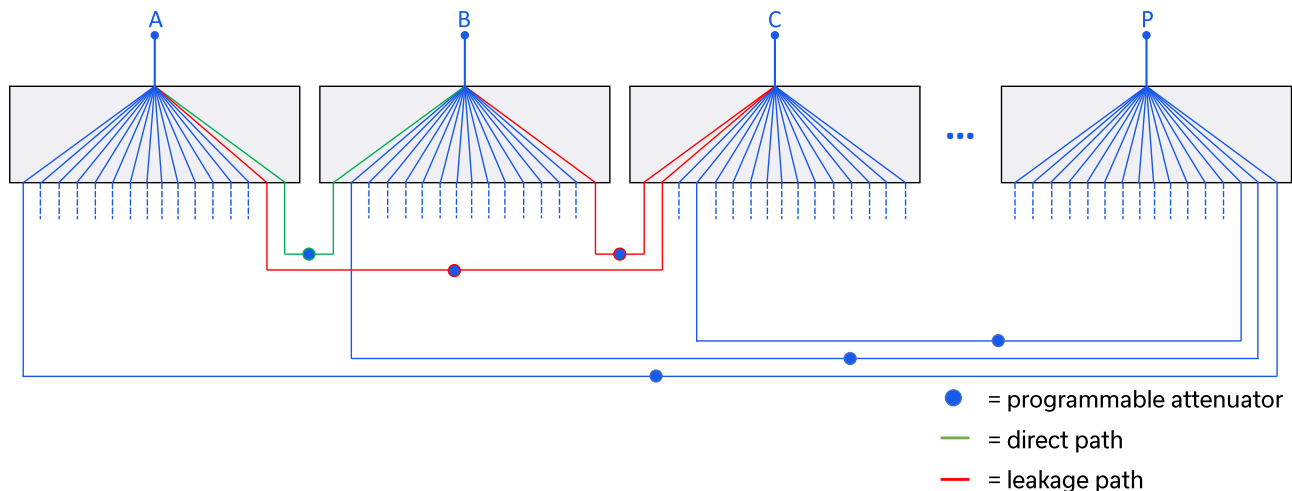MESH ISOLATION CHARACTERISTIC

The green path in the diagram above is the direct path between ports A & B. In an ideal mesh this would be the only route between these 2 ports. The insertion loss (IL) on the direct path is approximately as below, when the attenuator highlighted in green is set to 0 dB:

$$IL_{\text{DIRECT}} = IL_{\text{SPLITTER}} + IL_{\text{ATTENUATOR}} + IL_{\text{SPLITTER}}$$

The red path highlights an indirect, leakage path which also exists between ports A & B due to the finite isolation of the splitter / combiner component. A number of similar leakage paths also exist across the output ports of the other splitter / combiner components within the mesh. The worst-case isolation (ISO) of the red leakage path is approximately as below, when the attenuators highlighted in red are set to 0 dB:

$$ISO_{\text{LEAKAGE}} = IL_{\text{SPLITTER}} + IL_{\text{ATTENUATOR}} + ISO_{\text{SPLITTER}} + IL_{\text{ATTENUATOR}} + IL_{\text{SPLITTER}}$$

Mini-Circuits minimizes the leakage paths by design; a well-designed splitter / combiner component can offer in the order of 20 dB isolation over a wide bandwidth. It is not possible to remove entirely the leakage paths but their effects can be mitigated during operation of the mesh through careful choice of the programmable attenuation values in path. Mini-Circuits' recommendations are:

1. Terminate any unused external ports around the mesh to ensure the best impedance match throughout.
2. Set all programmable attenuators to their maximum values (90 dB) initially to ensure all direct and leakage paths are isolated, then reduce the attenuation on the specific paths required by the test scenario.
3. When leakage paths are affecting measurements, consider increasing the value on all internal programmable attenuators to minimize their significance. Every 1 dB increase in insertion loss on all direct paths, leads to a 2 dB increase on all indirect paths.

**CONTROL INTERFACES**

Ethernet Control	Supported Protocols	TCP / IP, SSH, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	100 Mbps (100Base-T Full Duplex)
USB Control	Supported Protocols	HID – High Speed
	Min Communication Time ⁴	400 μs typ

4. Based on the polling interval of the USB HID protocol (125 μs with 64 bytes per packet) and no other significant CPU or USB activity

SOFTWARE & DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB
- Programming / automation via Ethernet
 - Complete set of control commands which can be sent via any supported protocol – simple to implement in the majority of modern programming environments
- Programming / automation via USB
 - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX
 - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX)

Please contact testsolutions@minicircuits.com for support

MINIMUM SYSTEM REQUIREMENTS

Hardware	Intel i3 (or equivalent) or later
GUI (USB or Ethernet Control)	Windows 7 or later
USB API DLL	Windows 7 or later with support for Microsoft .Net Framework or ActiveX
USB Direct Programming	Windows 7 or later; Linux
Ethernet	Windows, Linux or macOS with Ethernet TCP / IP support

PROGRAMMING COMMANDS

The key ASCII / SCPI commands for control of the system for control via the Ethernet or USB API are summarized below (refer to the programming manual for full details):

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
: [address]:[channels]:SETATT:[value]	• Set attenuation [address] = Address of the attenuator module (refer to the Attenuator Path Map table) [channels] = Channel number (1 to 8) within the attenuator module. Multiple channels can be listed in a string, separated by colon (":"). [value] = Attenuation value to set (from 0 to 95 dB) Example 01:CHAN:1:2:3:SETATT:10.25
: [address]:[channels]:ATT?	• Return a single switch state: [address] = Address of the attenuator module (refer to the Attenuator Path Map table) [channels] = Channel number (1 to 8) within the attenuator module Example 01:CHAN:1:ATT?



Mini-Circuits


USB & ETHERNET

16-Port Mesh Network Emulator **ZTMN-1695A-S**


50Ω 30 to 3000 MHz Rack-Mount SMA Female

GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS

- Connect via USB or Ethernet
- Run GUI in "demo mode" to evaluate software without a hardware connection

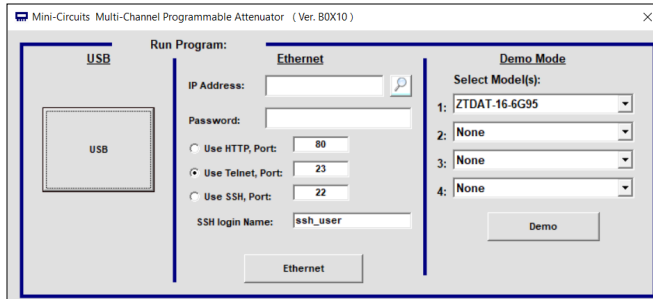

- View and set all switch states at the click of a button
- Configure automated / times switching sequences
- Configure Ethernet settings
- Update firmware

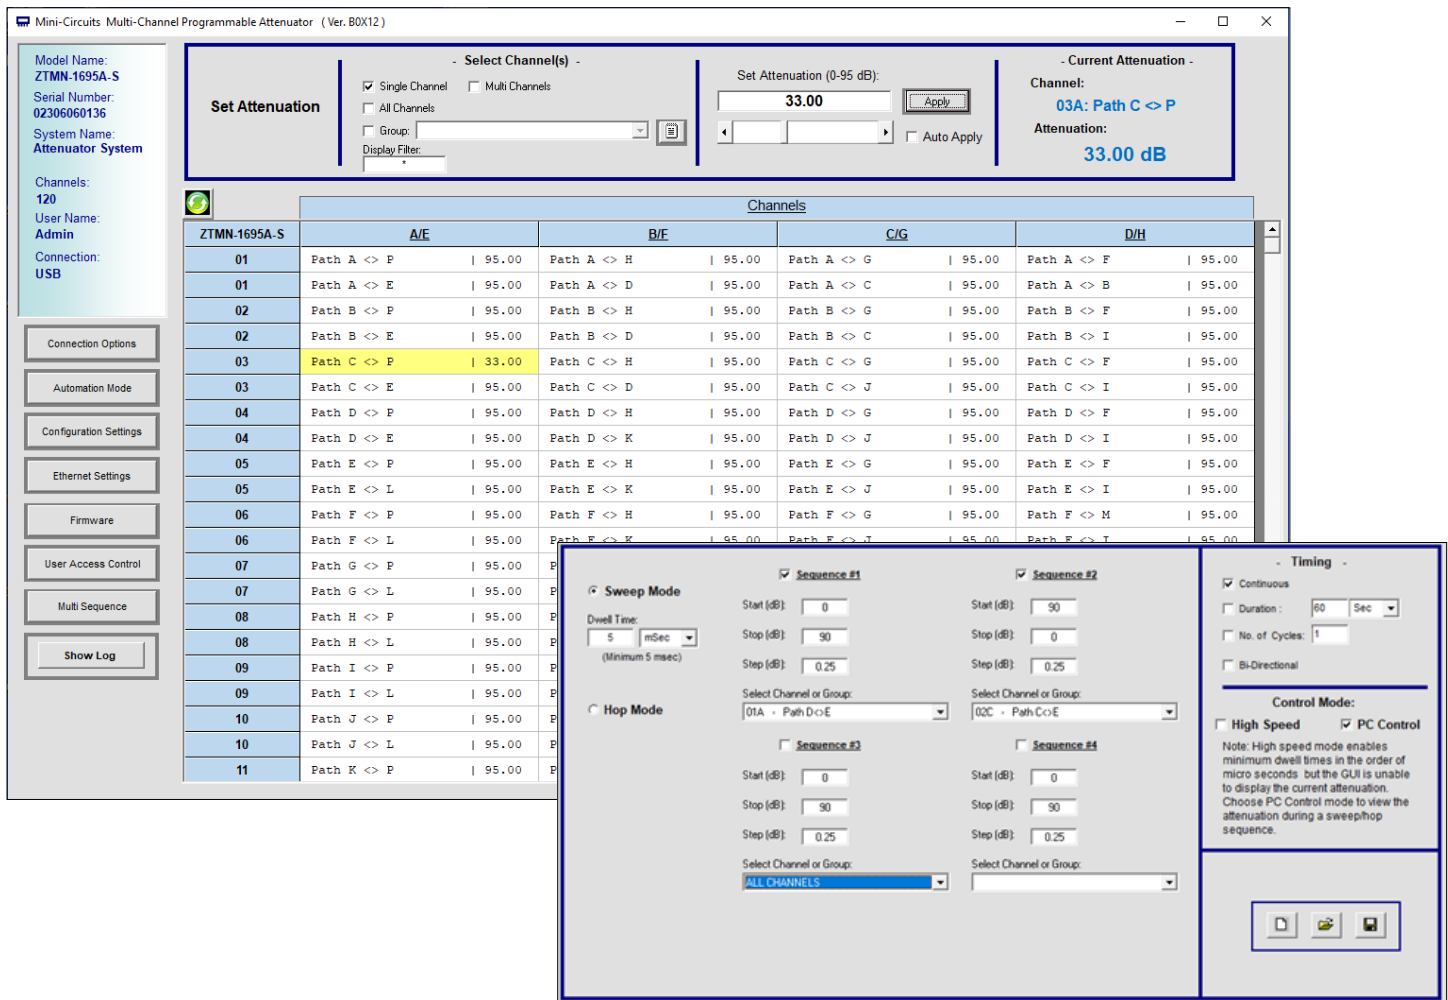

Mini-Circuits







Mini-Circuits

USB & ETHERNET

16-Port Mesh Network Emulator ZTMN-1695A-S

50Ω 30 to 3000 MHz Rack-Mount SMA Female

TYPICAL PERFORMANCE GRAPHS

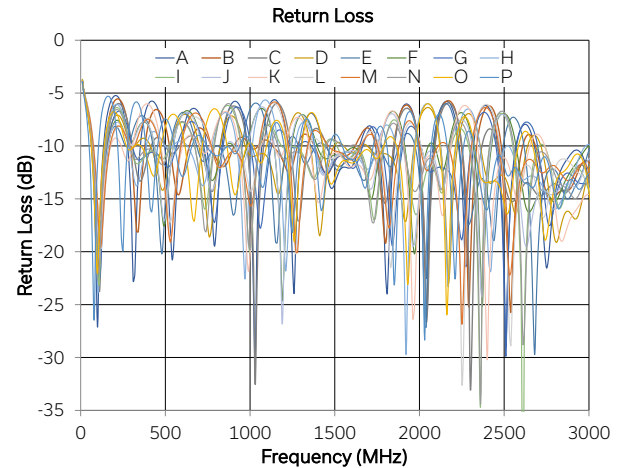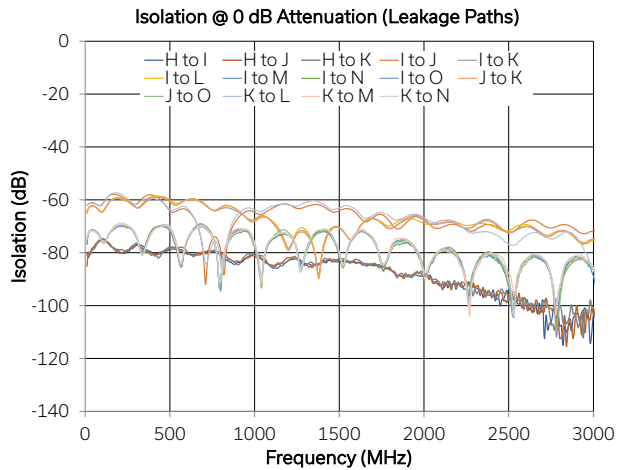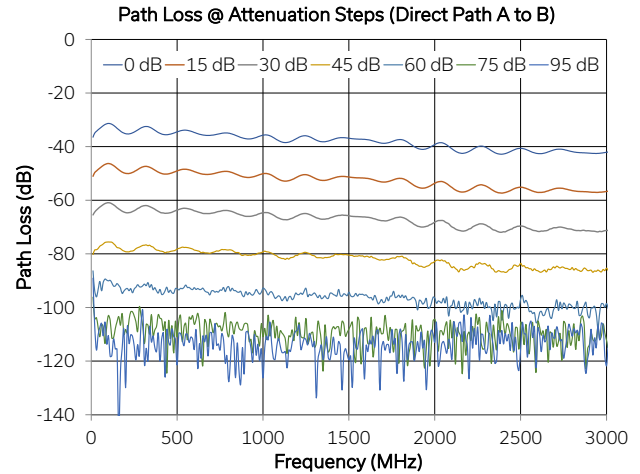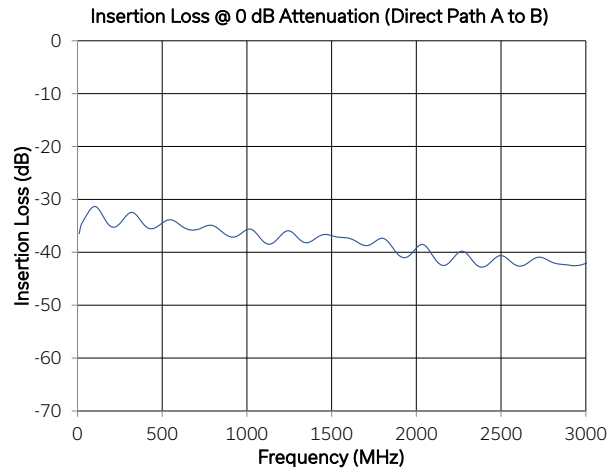



USB & ETHERNET

16-Port Mesh Network Emulator ZTMN-1695A-S

50Ω 30 to 3000 MHz Rack-Mount SMA Female

ABSOLUTE MAXIMUM RATINGS


Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	
Input Power (No Damage)	Per port	+25	dBm

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

POWER SUPPLY

Power Supply	AC mains input: 100-240 V, 50 / 60 Hz
Fuse	2A, 250V rating
Power Consumption	85W maximum

FUNCTIONAL BLOCK DIAGRAM

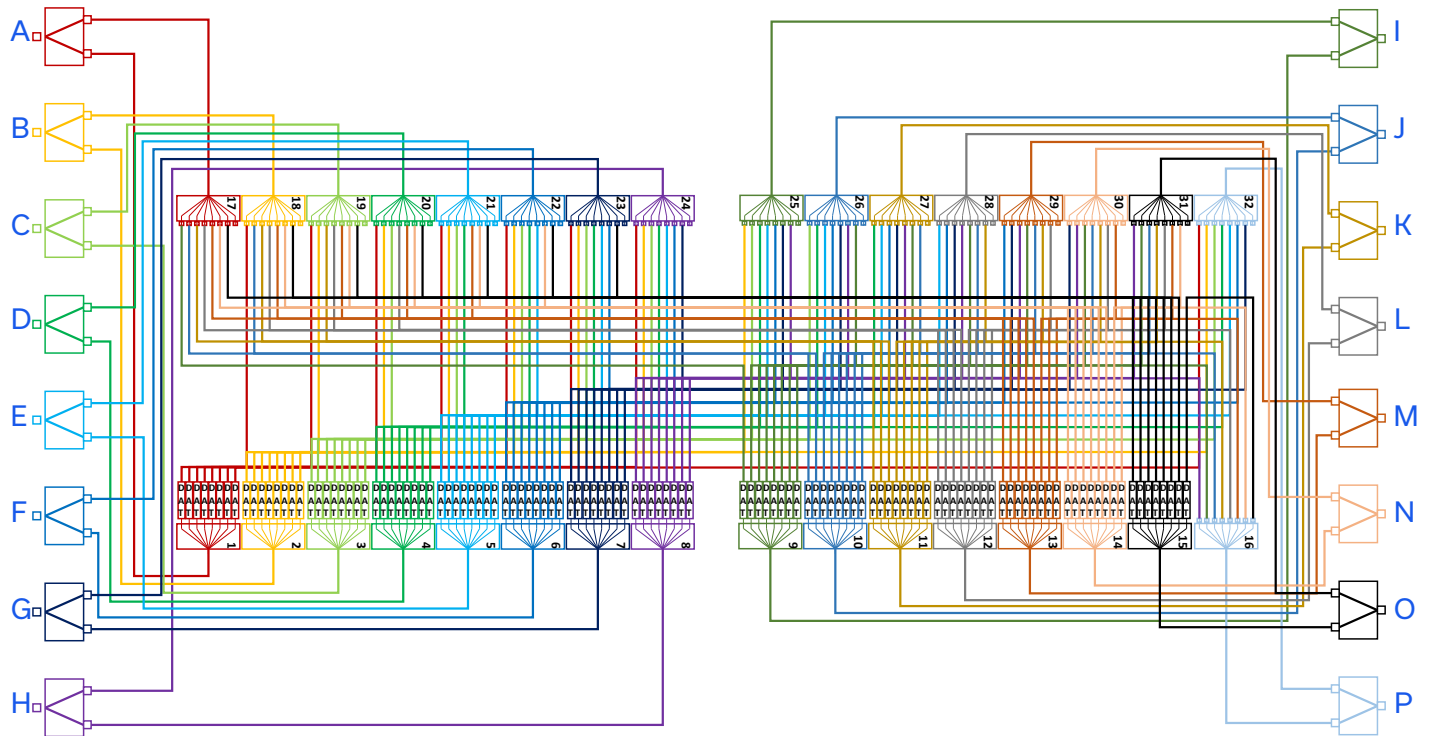

CONNECTIONS

Port	Connector
A to P	SMA female
USB	USB type B
Ethernet / LAN	RJ45
AC Input	IEC C14 inlet

**ATTENUATOR / PATH MAP**

- The mesh is constructed using fifteen 8-channel programmable attenuator blocks, addressed 01 to 15
- Each of the 8 channels within a block controls the path loss between a pair of ports, as shown below
- Refer to the table below to address the attenuator between any pair of ports

	Port														
	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
A	Att 1 - Ch H	Att 1 - Ch G	Att 1 - Ch F	Att 1 - Ch E	Att 1 - Ch D	Att 1 - Ch C	Att 1 - Ch B	Att 9 - Ch H	Att 10 - Ch H	Att 11 - Ch H	Att 12 - Ch H	Att 13 - Ch H	Att 13 - Ch H	Att 15 - Ch H	Att 1 - Ch A
B		Att 2 - Ch G	Att 2 - Ch F	Att 2 - Ch E	Att 2 - Ch D	Att 2 - Ch C	Att 2 - Ch B	Att 2 - Ch H	Att 10 - Ch G	Att 11 - Ch G	Att 12 - Ch G	Att 13 - Ch G	Att 14 - Ch G	Att 15 - Ch G	Att 2 - Ch A
C			Att 3 - Ch F	Att 3 - Ch E	Att 3 - Ch D	Att 3 - Ch C	Att 3 - Ch B	Att 3 - Ch H	Att 3 - Ch G	Att 11 - Ch F	Att 12 - Ch F	Att 13 - Ch F	Att 14 - Ch F	Att 15 - Ch F	Att 3 - Ch A
D				Att 4 - Ch E	Att 4 - Ch D	Att 4 - Ch C	Att 4 - Ch B	Att 4 - Ch H	Att 4 - Ch G	Att 4 - Ch F	Att 12 - Ch E	Att 13 - Ch E	Att 14 - Ch E	Att 15 - Ch E	Att 4 - Ch A
E					Att 5 - Ch D	Att 5 - Ch C	Att 5 - Ch B	Att 5 - Ch H	Att 5 - Ch G	Att 5 - Ch F	Att 5 - Ch E	Att 13 - Ch D	Att 14 - Ch D	Att 15 - Ch D	Att 5 - Ch A
F						Att 6 - Ch C	Att 6 - Ch B	Att 6 - Ch H	Att 6 - Ch G	Att 6 - Ch F	Att 6 - Ch E	Att 6 - Ch D	Att 14 - Ch C	Att 15 - Ch C	Att 6 - Ch A
G							Att 7 - Ch B	Att 7 - Ch H	Att 7 - Ch G	Att 7 - Ch F	Att 7 - Ch E	Att 7 - Ch D	Att 7 - Ch C	Att 15 - Ch B	Att 7 - Ch A
H								Att 8 - Ch H	Att 8 - Ch G	Att 8 - Ch F	Att 8 - Ch E	Att 8 - Ch D	Att 8 - Ch C	Att 8 - Ch B	Att 8 - Ch A
I									Att 9 - Ch G	Att 9 - Ch F	Att 9 - Ch E	Att 9 - Ch D	Att 9 - Ch C	Att 9 - Ch B	Att 9 - Ch A
J										Att 10 - Ch F	Att 10 - Ch E	Att 10 - Ch D	Att 10 - Ch C	Att 10 - Ch B	Att 10 - Ch A
K											Att 11 - Ch E	Att 11 - Ch D	Att 11 - Ch C	Att 11 - Ch B	Att 11 - Ch A
L												Att 12 - Ch D	Att 12 - Ch C	Att 12 - Ch B	Att 12 - Ch A
M													Att 13 - Ch C	Att 13 - Ch B	Att 13 - Ch A
N														Att 14 - Ch B	Att 14 - Ch A
O															Att 15 - Ch A




USB & ETHERNET

16-Port Mesh Network Emulator **ZTMN-1695A-S**

Mini-Circuits

50Ω 30 to 3000 MHz Rack-Mount SMA Female

OUTLINE DRAWING

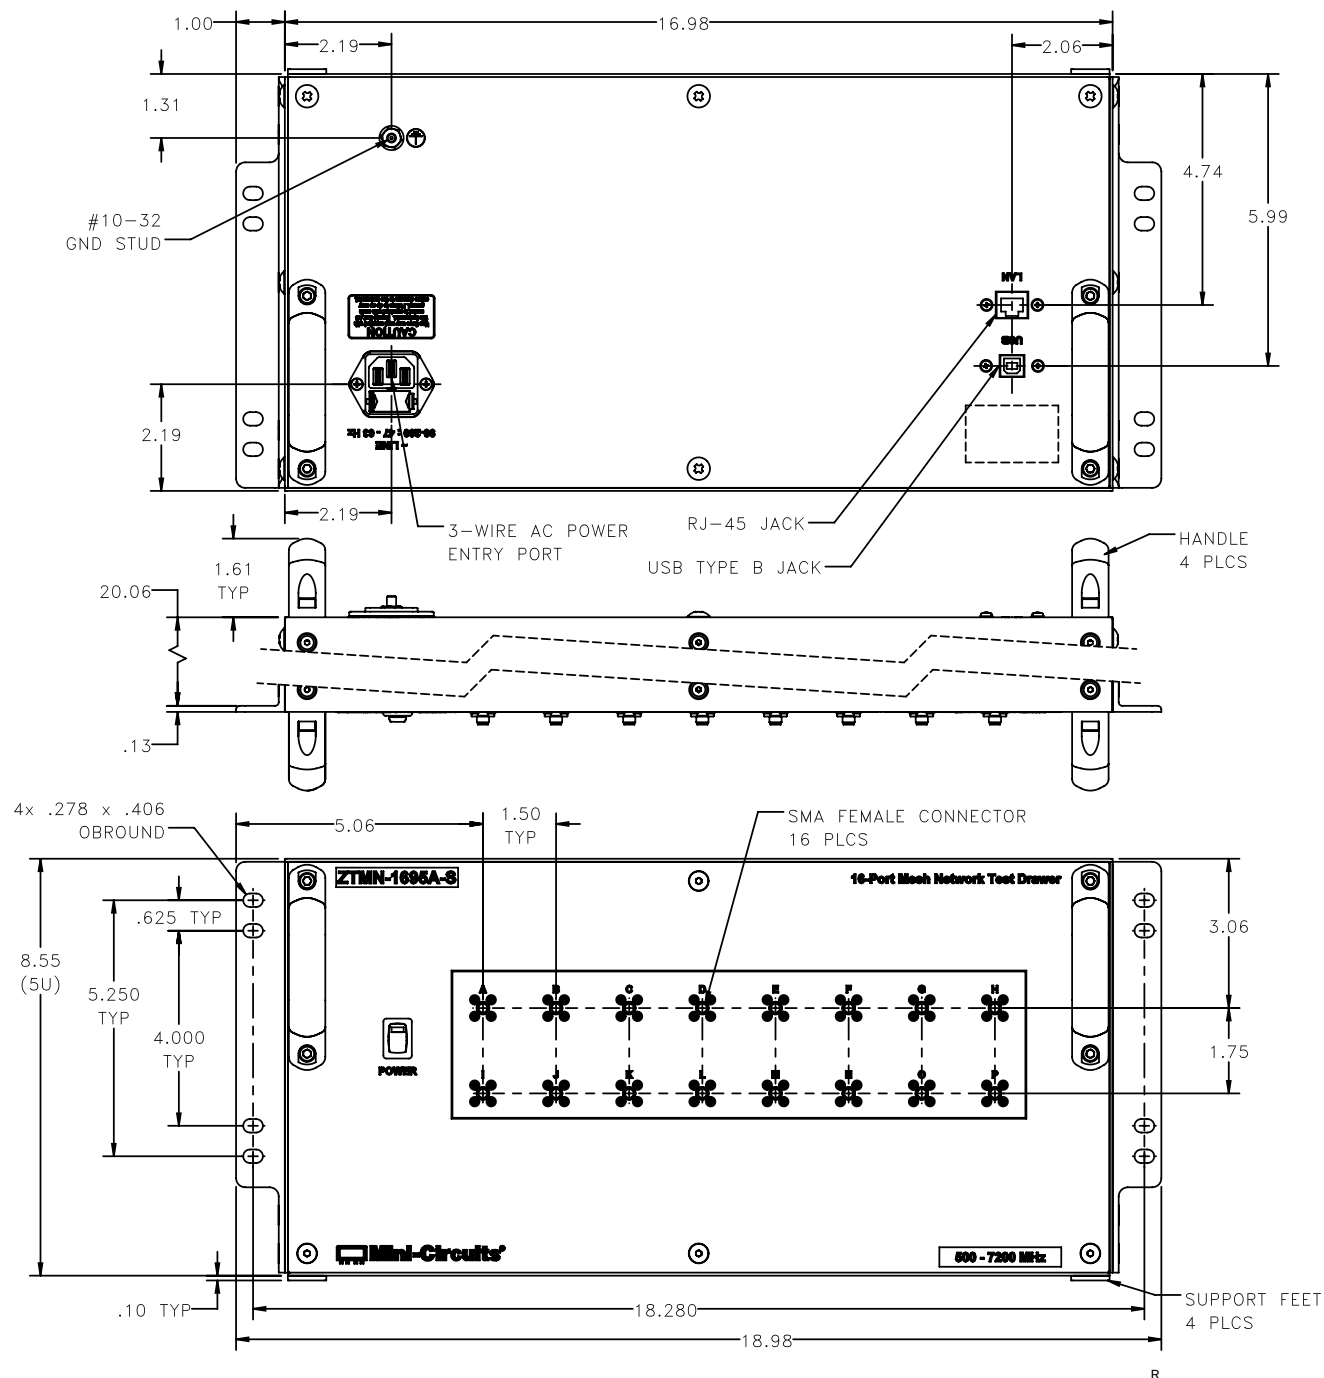

PRODUCT MARKING

Product Marking: ZTMN-1695A-S

Product Description: 16-Port Mesh Network Test Drawer

Product Frequency: 30-3000 MHz

Unit ID Label: Serial number and other identification marks

Mini-Circuits



USB & ETHERNET

16-Port Mesh Network Emulator **ZTMN-1695A-S**

50Ω 30 to 3000 MHz Rack-Mount SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	99-01-3524
Software, User Guide & Programming Manual	www.minicircuits.com/softwaredownload/multiatt.html
Environmental Rating	ENV55
Regulatory Compliance	Refer to our website for compliance methodologies and qualifications  www.minicircuits.com/quality/environmental_introduction.html

Contact Us: testsolutions@minicircuits.com

Included Accessories	Part Number	Description
	CBL-3W-xx	AC power cord (IEC C13 connector to local plug) Select one option from the list below. Please contact testsolutions@minicircuits.com if your regions is not listed.
	USB-CBL-AB-7+	USB cable (6.8ft) type A to type B
	CBL-RJ45-MM-5+	Ethernet cable (5 ft)
	HT-4-SMA	SMA connector wrench (4" length)

AC Power Cord Options	Part Number	Description
	CBL-3W-US	USA NEMA 5-15 plug (type B) to IEC C13 connector
	CBL-3W-EU	Europe CEE 7/7 plug (type E/F) to IEC C13 connector
	CBL-3W-UK	UK BS-1363 plug (type G) to IEC C13 connector
	CBL-3W-AU	Australia & China AS/NZS 3112 plug (type I) to IEC C13 connector
	CBL-3W-IL	Israel SI-32 plug (type H) to IEC C13 connector

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html