

# Monolithic Amplifier

# MAR-8ASM+

DC to 1 GHz 500

#### **FEATURES**

- Exact footprint substitute for MAR-8SM and MSA-0886<sup>a,b</sup>
- Benefits:
  - Lower device voltage, 3.7 typ.
  - Lower power dissipation in the MMIC
  - May eliminate need for choke (RFC)
- High gain, 31.5 dB at 0.1GHz, reduces component count
- High power output, +12.5 dBm typ.
- Internally Matched to 50 Ohms
- Low noise
- Improved stability
- Protection against power supply transients
- Protected by US Patent, 6,943,629



Generic photo used for illustration purposes only

CASE STYLE: WW107

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance.
our website for methodologies and qualification


#### **APPLICATIONS**


- Cellular
- PCN instrumentation

#### **PRODUCT OVERVIEW**

MAR-8ASM+ (RoHS compliant) is a wideband amplifier offering high dynamic range. It has repeatable performance from lot to lot. It is enclosed in a Micro-X package. MAR-8ASM+ uses Darlington configuration and is fabricated using InGaP HBT technology.

## SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

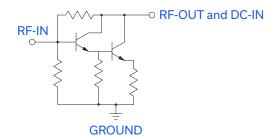



Function	Pin Number	Description		
RF-IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.		
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit".		
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.		

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses. b. The Avago MSA-0885 part number is used for identification and comparison purposes only.

REV. H ECO-021753 MAR-8ASM+ MCL NY 240509





# Monolithic Amplifier

# MAR-8ASM+

 $50\Omega$  DC to 1 GHz

# ELECTRICAL SPECIFICATIONS AT 25°C AND 36 mA, UNLESS NOTED OTHERWISE

Parameter	Frequency (GHz)	Min.	Тур.	Max.	Units
Frequency Range <sup>1</sup>		DC		1	GHz
Gain	f=0.1	_	31.5	_	dB
Gain	f=1	20 <sup>2</sup>	25	_	
Input Return Loss	f=DC to 1		15.5		dB
Output Return Loss	f=DC to 1		11		dB
Output Power @ 1 dB compression	f=1		+12.5		dBm
Output IP3	f=1		+25		dBm
Noise Figure	f=1		3.1		dB
Recommended Device Operating Current			36		mA
Device Operating Voltage			3.7		V
Device Voltage Variation vs. Temperature at 36 mA			+1.2		mV/°C
Device Voltage Variation vs. Current at 25°C		_	11.3		mV/mA
Thermal Resistance, junction-to-case <sup>2</sup>			140		°C/W


<sup>1.</sup> Guaranteed specification DC-1 GHz. Low frequency cut off determined by external coupling capacitors.

### **ABSOLUTE MAXIMUM RATINGS**<sup>3</sup>

Parameter	Ratings		
Operating Temperature⁴	-40°C to 85°C		
Storage Temperature	-55°C to 100°C		
Operating Current	65 mA		
Power Dissipation	250 mW		
Input Power	+13 dBm		

<sup>3.</sup> Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.

### **PRODUCT MARKING**



Markings in addition to model number designation may appear for internal quality control purposes.

<sup>2.</sup> Full temperature range.


<sup>4.</sup> Case is defined as ground leads.



# Monolithic Amplifier MAR-8ASM+

50Ω DC to 1 GHz

## RECOMMENDED APPLICATION CIRCUIT

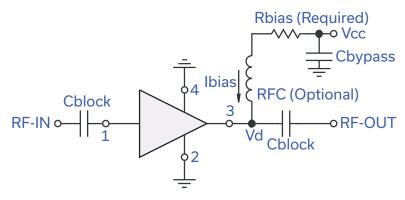

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS⁵				
Vcc	Bias Resistor Value <sup>6</sup>			
7	88.7			
8	118			
9	143			
10	174			
11	200			
12	226			
13	255			
14	280			
15	309			

 $<sup>5. \ \</sup> When being used as a substitute for MAR-8SM or MSA-0866, the bias resistor values must be changed$ to the values in this table.

<sup>6. 1%</sup> Resistor values (ohms) for optimum bias.



# Monolithic Amplifier

MAR-8ASM+

 $50\Omega$  DC to 1 GHz

# ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASH BOARD CLICK HERE

	Data		
Performance Data & Graphs	Graphs		
	S-Parameter (S2P Files) Data Set (.zip file)		
Case Style	WW107		
RoHS Status	Compliant		
Tape & Reel:	F4 7" Reels with 20, 50, 100, 200, 500, 1K devices		
Suggested Layout for PCB Design:	PL-253		
Evaluation Board	TB-411-8A+		
Environmental Ratings	ENV08T3		

#### **ESD RATING**

Human Body Model (HBM): Class 2 (2000 v to < 4000 v) in accordance with ANSI/ESD STM 5.1 - 2001

#### MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020C

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

