



COAXIAL

# Bandpass Filter

## VBF-1445+

Mini-Circuits

50Ω 1420 to 1470 MHz

### THE BIG DEAL

- Low Insertion Loss, 2.0 dB Typ.
- Good Close-in Rejection
- Versatile Small Size, Coaxial, 1.43" Length
- Temperature Stable
- Rugged Unibody Construction



Generic photo used for illustration purposes only

### APPLICATIONS

- Harmonic Rejection
- Transmitters / Receivers

Model No.	VBF-8450+
Case Style	FF704
Connectors	SMA

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### PRODUCT OVERVIEW

The VBF-1445+ Band Pass Filter is constructed using internal LTCC Band Pass Filter structure to achieve repeatable performance. Covering 1445 MHz ± 25 MHz, these units offer low insertion loss and good rejection at the band reject edges. Built using Mini-Circuits proven unibody construction which integrates the RF connectors with the case body, the VBF-1445+ takes very little space and meets rugged test lab system environment.

### KEY FEATURES

Feature	Advantages
Good Rejection close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Compact Versatile Case (1.43"x0.41")	Enables use in a variety of applications including space constrained connectorized systems. Connectors: SMA Female (1), SMA Male (2)
Rugged Unibody Construction	Mini-Circuits Unibody construction allows survivability in critical applications including militarized or industrial systems.

REV. D  
ECO-016495  
VBF-1445+  
URJ  
230118





COAXIAL

# Bandpass Filter

## VBF-1445+

### ELECTRICAL SPECIFICATIONS AT 25°C


Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	—	1445	—	MHz
	Insertion Loss	F1-F2	1420 - 1470	—	—	3.0	dB
	Return Loss	F1-F2	1420 - 1470	7.04	—	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	DC - 1140	—	20	—	dB
Stop Band, Upper	Insertion Loss	F4-F5	2600 - 4900	—	25	—	dB

### MAXIMUM RATINGS<sup>1</sup>


Parameter	Ratings
Operating temperature	-55°C to +100°C
Storage temperature	-55°C to +100°C
RF Power Input <sup>2</sup>	1.5W max. at 25°C

1. Permanent damage may occur if any of these limits are exceeded.
2. Passband rating, derate linearly to 0.25W at 100°C ambient.

### TYPICAL FREQUENCY RESPONSE

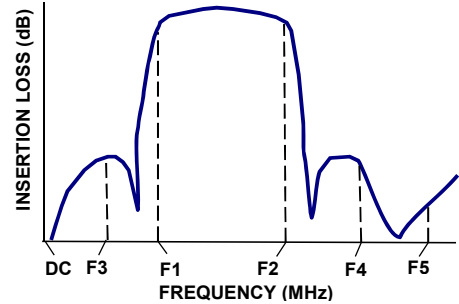

### FUNCTIONAL DIAGRAM

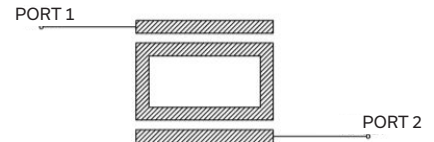



COAXIAL

# Bandpass Filter


VBF-1445+

Mini-Circuits

## COAXIAL CONNECTIONS

PORT 1 (RF IN)	SMA-Female
PORT 2 (RF OUT)	SMA-Male

## OUTLINE DRAWING

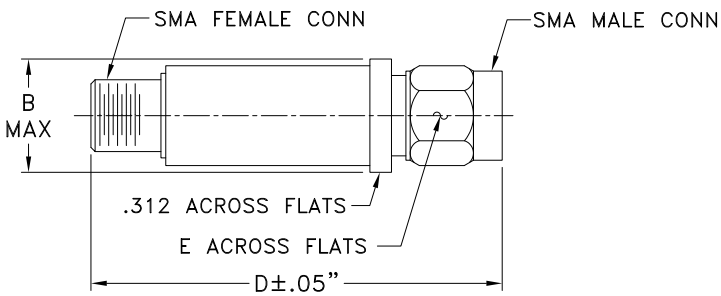

## OUTLINE DIMENSIONS (Inches/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0






COAXIAL

# Bandpass Filter

## VBF-1445+

### TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
0.30	65.58	0.01
300.00	37.88	0.18
700.00	38.27	0.25
1000.00	42.94	0.35
1075.00	39.44	0.43
1140.00	26.90	0.58
1180.00	21.37	0.75
1420.00	2.23	12.21
1470.00	2.03	17.45
2050.00	19.89	0.37
2400.00	26.38	0.29
2600.00	29.89	0.28
2800.00	33.65	0.27
3800.00	37.12	0.37
4900.00	32.50	0.53

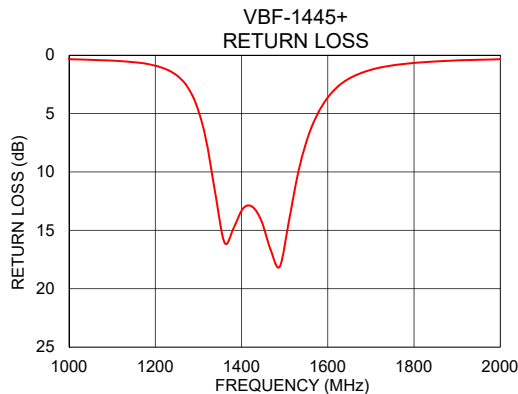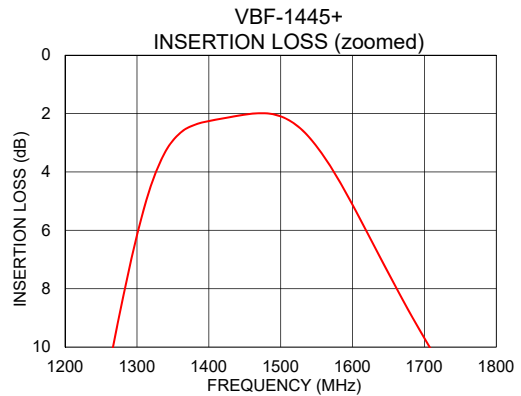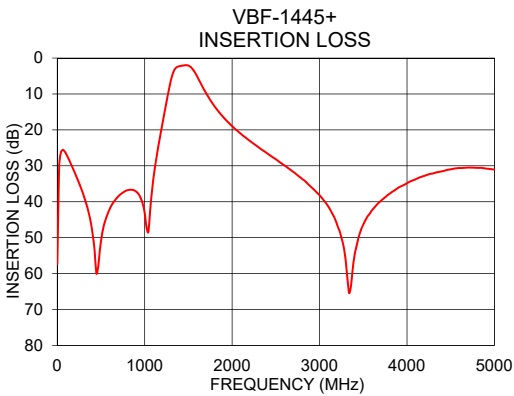

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

