

Coaxial

Voltage Controlled Oscillator

ZX95-3360A+

5V Tuning for PLL IC's 3160 to 3360 MHz

Features

- linear tuning characteristics
- low phase noise
- low pulling
- low pushing
- protected by US patent 6,790,049



CASE STYLE: GB956

Applications

- r & d
- lab
- Instrumentation
- wireless communications
- WiMAX 3.5 GHz

| Connectors | Model |
|------------|---------------|
| SMA | ZX95-3360A-S+ |

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

| MODEL NO. | FREQ. (MHz) | | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz | | | | TUNING | | | | | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) | | | PULLING pk-pk @12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER | | |
|-------------|-------------|------|--------------------|---|-----|------|------|-------------------|-----------------------|---------------|---------------------------------|------|-----------------------------|-----------------|------|------|----------------------------|-----------------|--------------------|------|---------|
| | Min. | Max. | | Typ. | | | | VOLTAGE RANGE (V) | SENSI- TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | Typ. | | Typ. | Max. | Typ. | | | Typ. | Vcc | Current |
| | | | | 1 | 10 | 100 | 1000 | Min. | Max. | Typ. | Typ. | Typ. | | Typ. | Typ. | Typ. | | | Max. | Max. | Max. |
| ZX95-3360A+ | 3160 | 3360 | +3.5 | -69 | -96 | -117 | -138 | 0.5 | 5 | 74-84 | 12 | 120 | -90 | -18 | -10 | 1 | 1 | 5 | 45 | | |

Maximum Ratings


| | |
|--------------------------------------|----------------|
| Operating Temperature | -55°C to 85°C |
| Storage Temperature | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc) | 6V |
| Absolute Max. Tuning Voltage (Vtune) | 7V |
| All specifications | 50 ohm system |

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note AN-40-10.

Outline Drawing

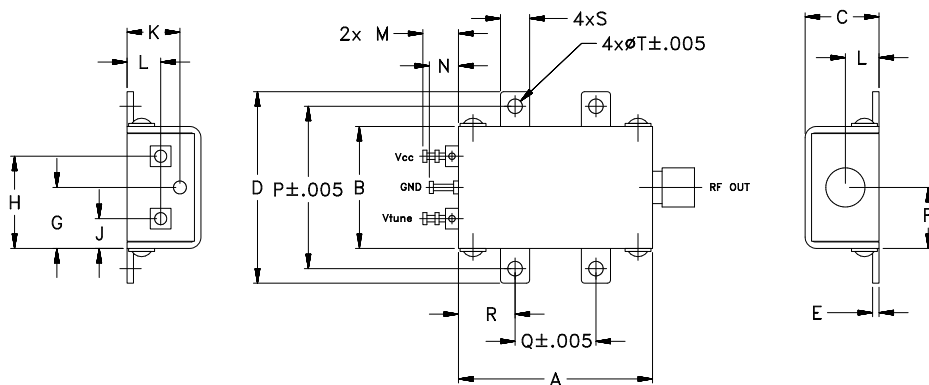

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | Q | R | S | T | wt. |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20 | .75 | .46 | 1.18 | .04 | .38 | .38 | .57 | .18 | .33 | .21 | .22 | .18 | 1.00 | .50 | .35 | .18 | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0 |

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. B
M152326
EDR-10093F2
ZX95-3360A+
RAV
150923
Page 1 of 2

Performance Data & Curves*

ZX95-3360A+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) | | | POWER OUTPUT (dBm) | | | Icc (mA) | HARMONICS (dBc) | | | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets | | | | FREQ OFFSET (KHz) | PHASE NOISE at 3260 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|-------|--------|--------|-------------------|----------------------------------|
| | | -55°C | +25°C | +85°C | -55°C | +25°C | +85°C | | F2 | F3 | F4 | | | 1kHz | 10kHz | 100kHz | 1MHz | | |
| 0.00 | 126.51 | 3026.7 | 3011.6 | 2999.8 | 3.72 | 3.30 | 2.87 | 36.95 | -20.7 | -32.4 | -48.4 | 2.90 | 1.08 | -67.8 | -94.9 | -116.3 | -136.4 | 1.0 | -69.02 |
| 0.50 | 101.12 | 3084.1 | 3071.6 | 3061.4 | 3.81 | 3.38 | 3.14 | 37.08 | -20.2 | -31.7 | -47.9 | 1.18 | 0.79 | -68.7 | -95.9 | -117.4 | -137.5 | 2.0 | -77.81 |
| 0.75 | 93.81 | 3109.8 | 3096.9 | 3086.7 | 3.78 | 3.38 | 3.17 | 37.16 | -19.4 | -31.7 | -48.9 | 0.84 | 0.87 | -68.4 | -96.2 | -117.6 | -137.9 | 3.5 | -84.05 |
| 1.00 | 91.97 | 3133.3 | 3120.3 | 3111.3 | 3.82 | 3.38 | 3.13 | 37.20 | -19.1 | -32.1 | -48.1 | 0.59 | 0.79 | -69.1 | -95.5 | -117.5 | -137.7 | 6.0 | -90.60 |
| 1.25 | 86.16 | 3155.4 | 3143.3 | 3133.7 | 3.86 | 3.35 | 3.19 | 37.26 | -18.7 | -31.5 | -48.5 | 0.39 | 0.51 | -69.5 | -95.7 | -117.8 | -137.9 | 8.5 | -94.30 |
| 1.50 | 82.94 | 3177.1 | 3164.9 | 3155.2 | 3.82 | 3.35 | 3.28 | 37.33 | -18.7 | -31.4 | -48.2 | 0.25 | 0.75 | -68.5 | -96.3 | -118.0 | -138.1 | 10.0 | -95.82 |
| 1.75 | 82.52 | 3198.1 | 3185.6 | 3176.2 | 3.82 | 3.39 | 3.30 | 37.39 | -18.7 | -32.1 | -48.7 | 0.11 | 0.89 | -69.6 | -96.1 | -117.9 | -138.2 | 20.8 | -103.18 |
| 2.00 | 81.07 | 3218.6 | 3206.2 | 3196.9 | 3.84 | 3.38 | 3.30 | 37.41 | -18.4 | -32.4 | -46.7 | 0.03 | 0.73 | -69.7 | -95.9 | -117.7 | -138.0 | 35.5 | -108.16 |
| 2.25 | 79.42 | 3238.9 | 3226.5 | 3216.9 | 3.81 | 3.37 | 3.29 | 37.47 | -18.2 | -32.9 | -48.3 | 0.14 | 0.49 | -68.3 | -95.5 | -117.7 | -138.1 | 60.7 | -112.95 |
| 2.50 | 78.66 | 3259.0 | 3246.4 | 3236.6 | 3.82 | 3.35 | 3.25 | 37.51 | -18.3 | -33.1 | -47.4 | 0.25 | 0.70 | -69.1 | -96.3 | -117.8 | -138.0 | 86.7 | -116.26 |
| 2.75 | 79.08 | 3278.9 | 3266.0 | 3256.3 | 3.83 | 3.32 | 3.26 | 37.55 | -18.2 | -33.2 | -47.7 | 0.37 | 0.72 | -69.6 | -95.7 | -117.8 | -137.8 | 100.0 | -117.46 |
| 3.00 | 78.18 | 3298.7 | 3285.8 | 3275.7 | 3.82 | 3.29 | 3.30 | 37.57 | -18.0 | -33.3 | -47.4 | 0.46 | 0.57 | -70.8 | -95.6 | -117.7 | -137.7 | 148.1 | -120.96 |
| 3.25 | 77.85 | 3318.6 | 3305.3 | 3295.2 | 3.80 | 3.27 | 3.29 | 37.60 | -17.9 | -34.3 | -46.7 | 0.51 | 0.40 | -69.2 | -95.7 | -117.6 | -137.8 | 177.0 | -122.56 |
| 3.50 | 78.29 | 3338.2 | 3324.8 | 3314.8 | 3.80 | 3.25 | 3.26 | 37.61 | -17.9 | -33.8 | -46.8 | 0.54 | 0.65 | -68.5 | -95.7 | -117.6 | -137.7 | 211.6 | -124.18 |
| 3.75 | 77.19 | 3357.7 | 3344.4 | 3334.1 | 3.78 | 3.21 | 3.22 | 37.62 | -17.8 | -33.2 | -47.6 | 0.54 | 0.74 | -68.7 | -95.6 | -117.4 | -137.6 | 302.4 | -127.22 |
| 4.00 | 75.68 | 3377.1 | 3363.7 | 3353.2 | 3.73 | 3.20 | 3.20 | 37.64 | -17.8 | -32.4 | -47.1 | 0.54 | 0.56 | -70.0 | -95.3 | -117.4 | -137.7 | 355.1 | -128.63 |
| 4.25 | 74.14 | 3396.3 | 3382.6 | 3371.9 | 3.71 | 3.19 | 3.20 | 37.65 | -17.7 | -31.9 | -46.9 | 0.53 | 0.23 | -68.5 | -95.6 | -117.7 | -137.9 | 498.5 | -131.73 |
| 4.50 | 72.45 | 3414.7 | 3401.1 | 3390.8 | 3.68 | 3.14 | 3.19 | 37.65 | -17.8 | -31.6 | -46.7 | 0.52 | 0.58 | -69.6 | -95.3 | -117.5 | -137.6 | 595.9 | -133.20 |
| 4.75 | 69.55 | 3432.6 | 3419.2 | 3408.9 | 3.65 | 3.11 | 3.17 | 37.68 | -17.8 | -31.2 | -47.2 | 0.49 | 0.62 | -68.7 | -95.6 | -117.9 | -138.1 | 982.3 | -137.46 |
| 5.00 | 67.51 | 3449.9 | 3436.6 | 3426.3 | 3.61 | 3.07 | 3.15 | 37.71 | -17.6 | -30.9 | -47.0 | 0.48 | 0.45 | -69.8 | -95.4 | -118.0 | -138.2 | 1000.0 | -137.60 |

*at 25°C unless mentioned otherwise

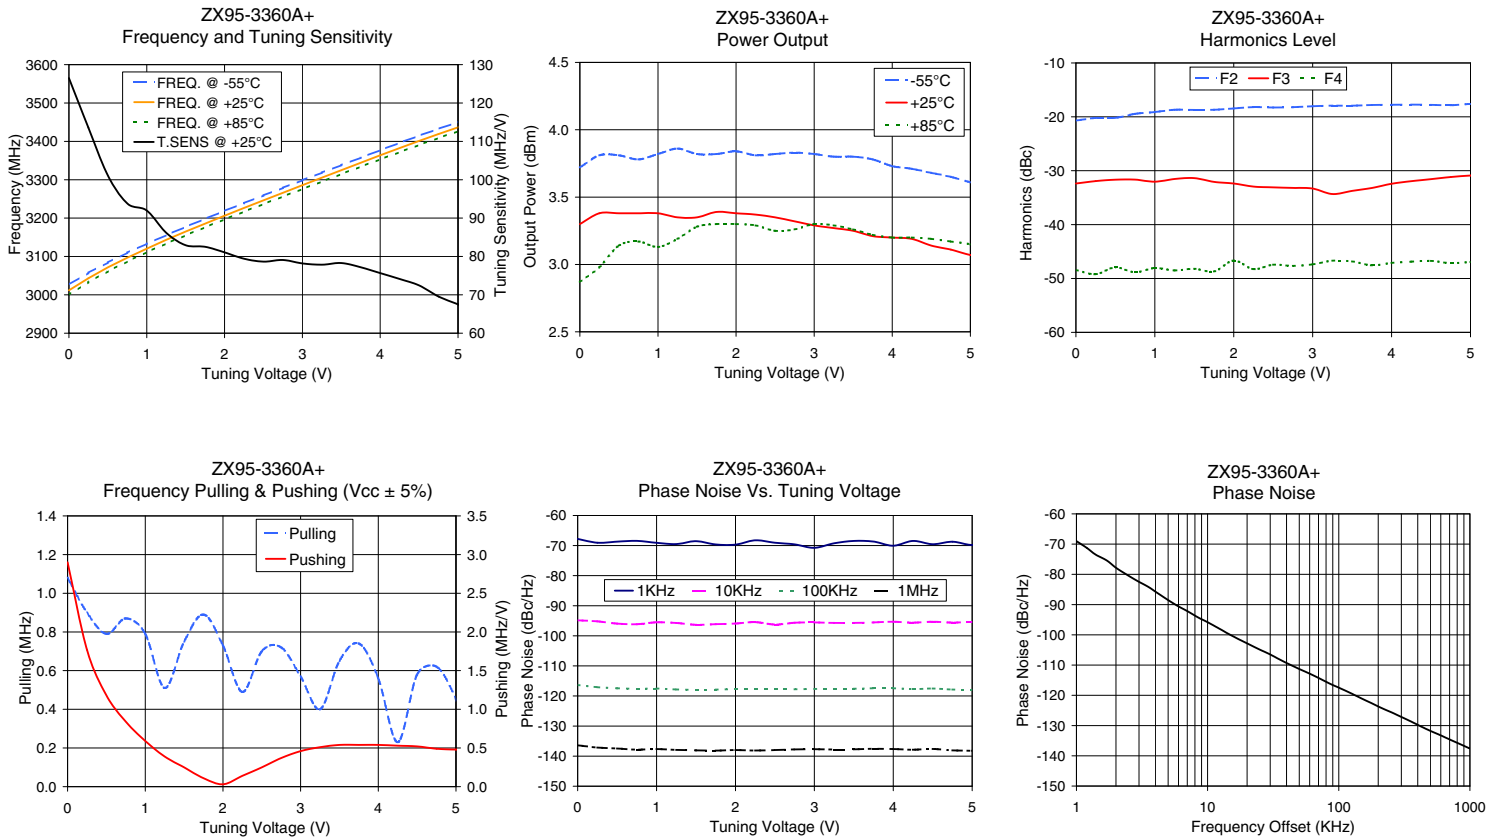

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

