

**KEY FEATURES**

- Wideband, DC to 67 GHz
- Low Insertion Loss, 0.18 dB Typ.
- Excellent VSWR, 1.03:1 Typ.
- Straight Body

*Generic photo used for illustration purposes only***PRODUCT OVERVIEW**

Mini-Circuits' 135F-185F+ is a coaxial 1.35 mm Female to 1.85 mm Female adapter supporting a wide range of applications from DC to 67 GHz. This model provides excellent VSWR and low insertion loss versus frequency. The 135F-185F+ features passivated stainless-steel construction and measures only 0.83" in length.

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		67	GHz
Insertion Loss	0.01-15	-	0.10	0.68	dB
	15-45	-	0.18	0.68	
	45-67	-	0.27	0.68	
VSWR	0.01-15	-	1.02	1.25	:1
	15-45	-	1.04	1.25	
	45-67	-	1.05	1.25	

ABSOLUTE MAXIMUM RATINGS¹

Operating Case Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C

1. Permanent damage may occur if any of these limits are exceeded.






COAXIAL

Adapter

135F-185F+

50 Ω DC to 67 GHz 1.35 mm-Female to 1.85 mm-Female

TYPICAL PERFORMANCE GRAPHS

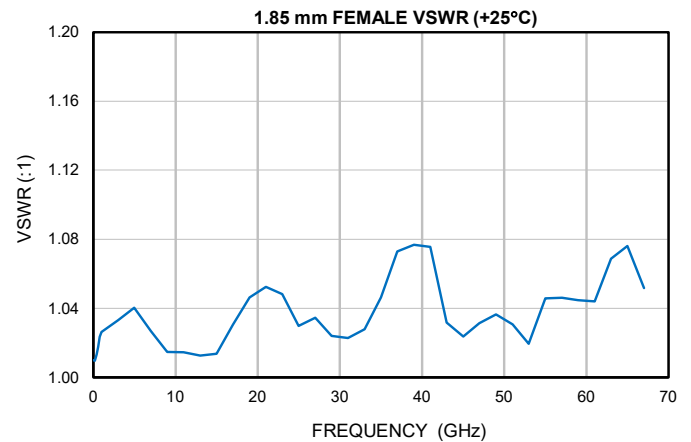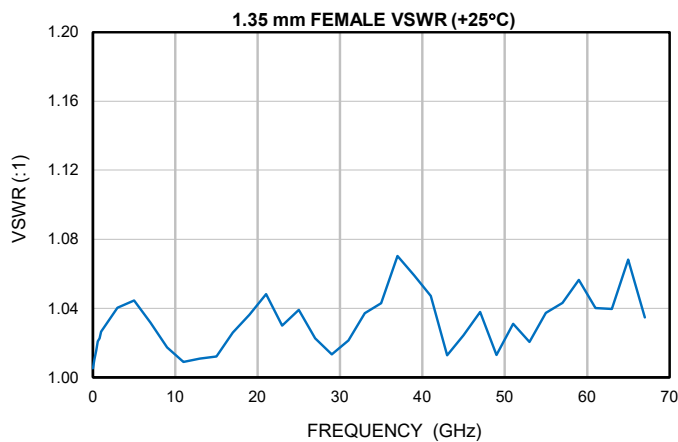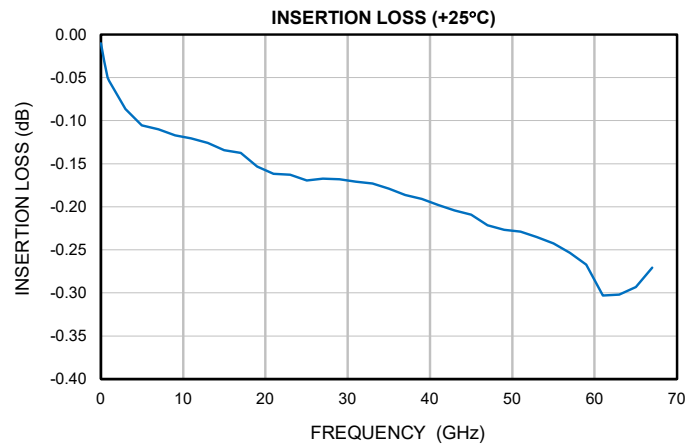



Adapter


135F-185F+

50Ω DC to 67 GHz 1.35 mm-Female to 1.85 mm-Female

CONNECTOR SPECIFICATIONS

Description	Connector 1	Connector 2
Connector Type	1.35 mm Female	1.85 mm Female
Orientation	Straight	Straight

CASE STYLE DRAWING

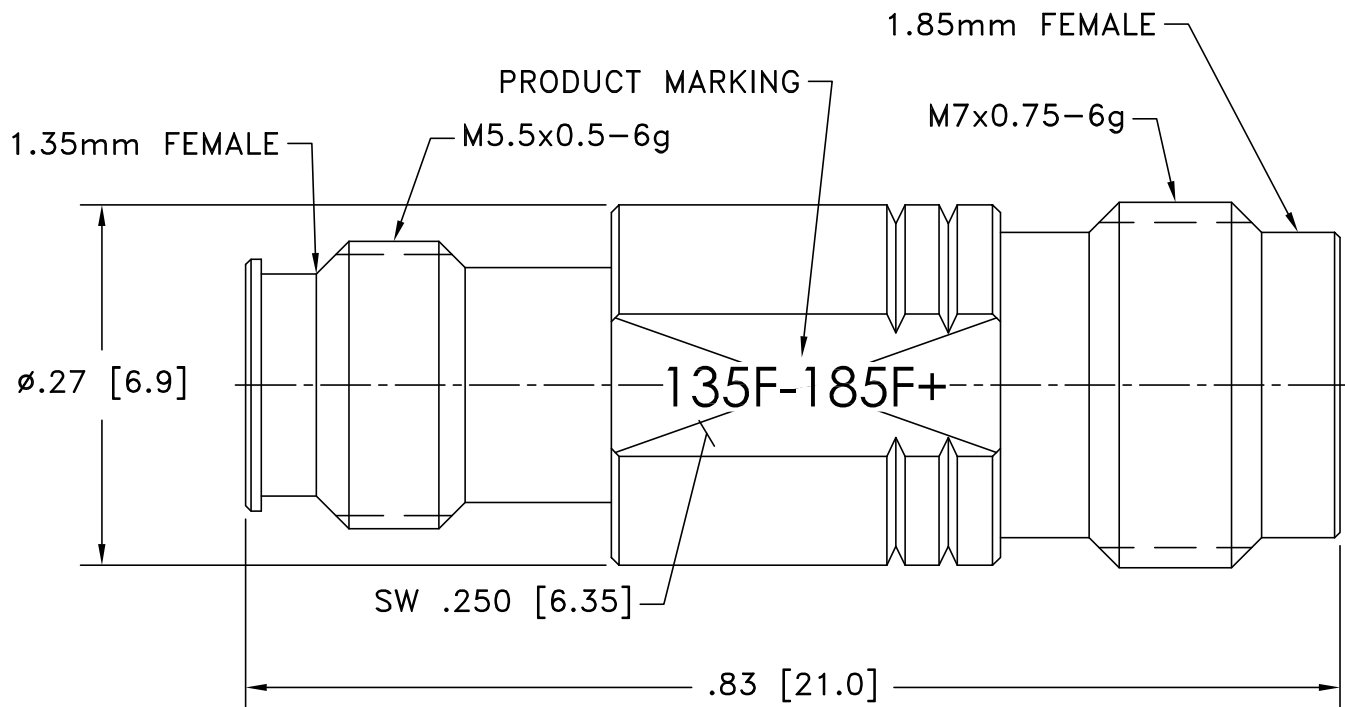

Weight: 3.6 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$ inches

PRODUCT MARKING*: 135F-185F+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

COAXIAL

Adapter

135F-185F+

50Ω DC to 67 GHz 1.35 mm-Female to 1.85 mm-Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DJ3602-7
RoHS Status	Compliant
Environmental Ratings	ENV89




- NOTES
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html




Adaptor 1.35mm-Female to 1.85mm-Female**135F-185F+***Typical Performance Data (+25°C)*

FREQ.	INSERTION LOSS	1.35mm-FEMALE VSWR	1.85mm-FEMALE VSWR
(GHz)	(dB)	(:1)	(:1)
0.01	0.01	1.01	1.01
0.2	0.02	1.01	1.01
0.4	0.03	1.02	1.01
0.6	0.04	1.02	1.02
0.8	0.05	1.02	1.02
1.0	0.05	1.03	1.03
3.0	0.09	1.04	1.03
5.0	0.11	1.04	1.04
7.0	0.11	1.03	1.03
9.0	0.12	1.02	1.01
11.0	0.12	1.01	1.01
13.0	0.13	1.01	1.01
15.0	0.13	1.01	1.01
17.0	0.14	1.03	1.03
19.0	0.15	1.04	1.05
21.0	0.16	1.05	1.05
23.0	0.16	1.03	1.05
25.0	0.17	1.04	1.03
27.0	0.17	1.02	1.03
29.0	0.17	1.01	1.02
31.0	0.17	1.02	1.02
33.0	0.17	1.04	1.03
35.0	0.18	1.04	1.05
37.0	0.19	1.07	1.07
39.0	0.19	1.06	1.08
41.0	0.20	1.05	1.08
43.0	0.20	1.01	1.03
45.0	0.21	1.02	1.02
47.0	0.22	1.04	1.03
49.0	0.23	1.01	1.04
51.0	0.23	1.03	1.03
53.0	0.24	1.02	1.02
55.0	0.24	1.04	1.05
57.0	0.25	1.04	1.05
59.0	0.27	1.06	1.04
61.0	0.30	1.04	1.04
63.0	0.30	1.04	1.07
65.0	0.29	1.07	1.08
67.0	0.27	1.03	1.05

Typical Performance Curves

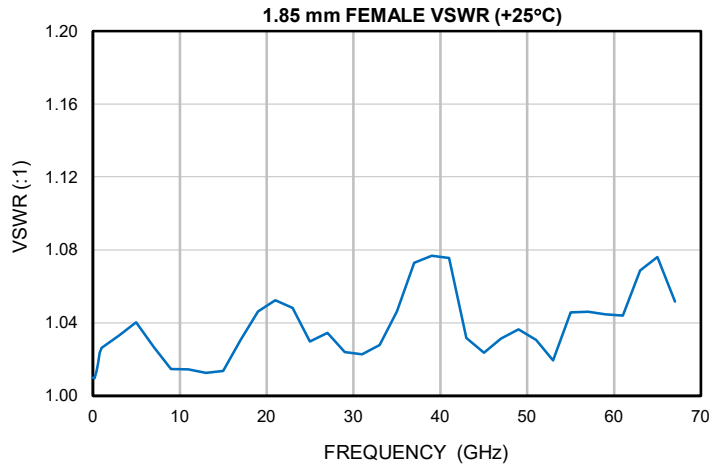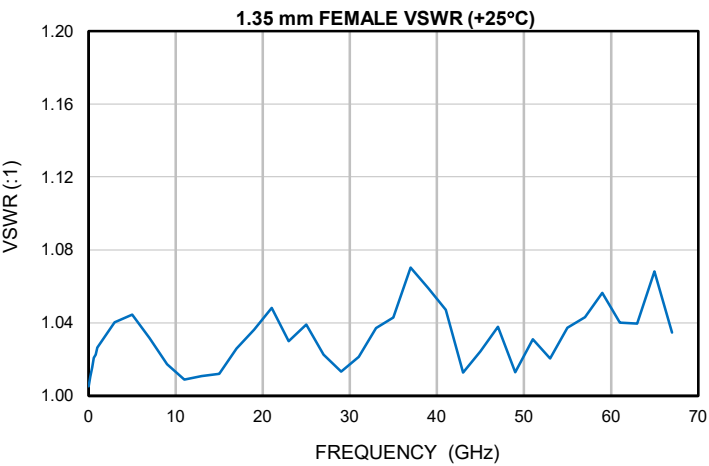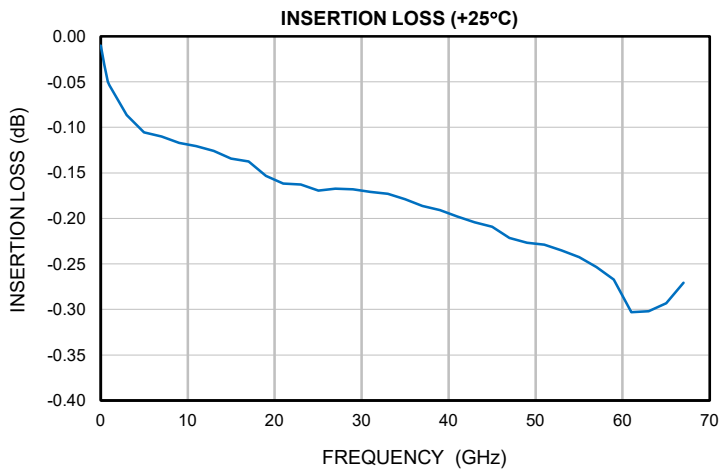

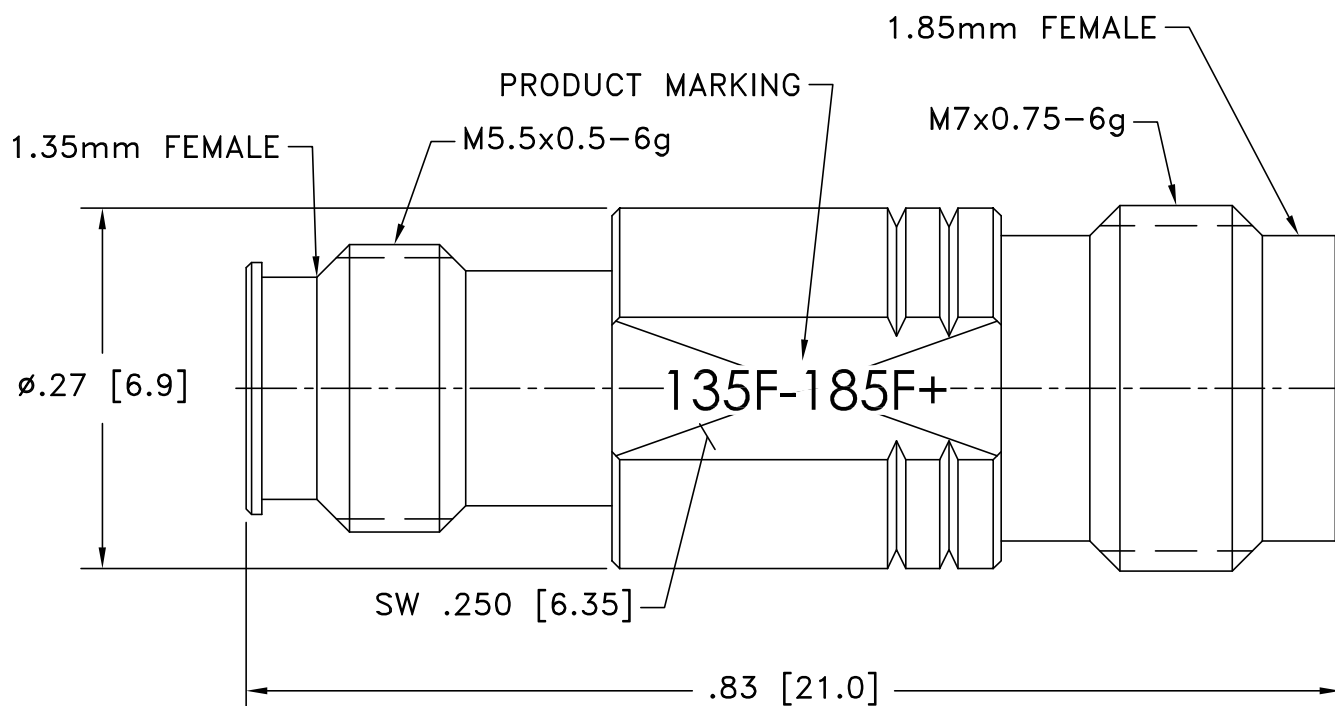

Weight: 3.6 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$ inches

Notes:

1. Case material: Stainless Steel.
2. Finish: Passivation.
3. Primary dimensions are in inches [millimeters]. Inch equivalents are calculated and subject to roundoff errors.



ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

