



### THE BIG DEAL

- Wide attenuation range, 120 dB
- Fine attenuation resolution, 0.25 dB
- Short attenuation transition time (650 ns)
- Compact size, 2.50 x 3.00 x 0.85"
- USB and Ethernet control

### APPLICATIONS

- LTE, 5G FR1, DVB fading simulators
- Wi-Fi device testing
- Signal level calibration
- Automated gain control
- Laboratory instrumentation



Generic photo used for illustration purposes only

### PRODUCT OVERVIEW

Mini-Circuits' RCDAT-4000-120 is a general purpose, single channel programmable attenuator suitable for a wide range of signal level control applications from 1 to 4000 MHz. The attenuator provides 0 to 120 dB attenuation in 0.25 dB steps. Its unique design maintains linear attenuation change per dB, even at the highest attenuation settings.

The attenuator is housed in a compact and rugged package with SMA female connectors on the bi-directional input and output RF ports, a standard Ethernet port (RJ45) and a USB type Mini-B power and control port.

Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments (both 32-bit and 64-bit systems).

### KEY FEATURES

Feature	Advantages
Programmable attenuation sequences	Configure timed sweep and hop sequences to run unaided without additional user interaction.
120 dB attenuation range	The module provides high-accuracy attenuation up to 120 dB in 0.25 dB steps, allowing the user precise level control over a broad attenuation and frequency range.
High linearity	Typical input IP3 of +53 dBm up to 4000 MHz.
USB and Ethernet control	USB HID and Ethernet (HTTP / Telnet) interfaces provide easy compatibility with a wide range of software setups and programming environments.

#### Trademarks:

All trademarks cited within this document are the property of their respective owners. Neither Mini-Circuits nor the Mini-Circuits products are affiliated with or endorsed or sponsored by the owners of the referenced trademarks. Mini-Circuits and the Mini-Circuits logo are registered trademarks of Scientific Components Corporation.

ELECTRICAL SPECIFICATIONS <sup>1</sup>, 0 TO +50°C

Parameter	Conditions	Frequency (MHz)	Min.	Typ.	Max.	Unit
Attenuation Range	0.25 dB step	1 - 4000	0	-	120	dB
Attenuation Accuracy <sup>2</sup>	0.25 - 10 dB	1 - 2000	-	±0.15	±(0.25+8.0% of setting)	dB
		2000 - 4000	-	±0.15	±(0.20+6.0% of setting)	
	10.25 - 40 dB	1 - 2000	-	±0.55	±(0.40+5.0% of setting)	
		2000 - 4000	-	±0.50	±(0.80+3.0% of setting)	
	40.25 - 90 dB	1 - 2000	-	±0.50	±(0.80+2.0% of setting)	
2000 - 4000	-	±0.25	±(1.10+1.0% of setting)			
90.25 - 120 dB	1 - 2000	-	±0.70	±(-2.60+5.5% of setting)		
	2000 - 4000	-	±0.35	±(-7.0+10.0% of setting)		
Insertion Loss	0 dB	1 - 2000	-	6.5	8.5	dB
		2000 - 4000	-	9.0	10.5	
Isolation	In-Out <sup>3</sup>	1 - 4000	-	134	-	dB
Return Loss In	0 - 20 dB	1 - 500	-	15	-	dB
		500 - 4000	-	23	-	
Return Loss Out	0 - 10 dB	1 - 500	-	15	-	dB
		500 - 3500	-	23	-	
		3500 - 4000	-	15	-	
	10.25 - 120 dB	1 - 4000	-	17	-	
IP3 Input <sup>4</sup>	0 dB setting (P <sub>IN</sub> = +10 dBm)	1 - 4000	-	+53	-	dBm
Attenuation Transition Time <sup>5</sup>	-	1 - 4000	-	650	-	ns
Minimum Dwell Time <sup>6</sup>	High-speed mode	1 - 4000	-	600	-	µs

- Attenuator RF ports support simultaneous, bi-directional signal transmission, within the specified power limits. However the specifications are guaranteed for the RF In and RF Out as noted on the label. There may be minor changes in performance when injecting signals to the RF Out port.
- Max accuracy defined as ±[absolute error+% of attenuation setting]. For example, if a 20 dB attenuation at a given frequency is defined as max accuracy of "±(0.5 + 3.0%)" then the maximum error at those settings will be: ±(0.5+0.03x20)= ±(0.5+0.6)= ± 1.1 dB.
- Isolation within a channel is defined as max attenuation plus insertion loss; this is the path loss through the attenuator when initially powered up. After a brief delay (~0.5 sec typically) the attenuator will revert to a user defined "power-up" state (either max attenuation or a pre-set value).
- Tested with 1 MHz span between signals.
- Attenuation Transition Time is specified as the time between starting to change the attenuation state and settling on the requested attenuation state.
- Minimum Dwell Time is the minimum time from settling on one attenuation level to settling to a new one in response to command (without communication protocol delays).



### ELECTRICAL SPECIFICATIONS, 0 TO +50°C (CONTINUED)

Parameter	Conditions	Frequency (MHz)	Min.	Typ.	Max.	Unit
Supply Voltage ( $V_{DC}$ )	USB port	-	4.75	5.00	5.25	V
Supply Current ( $I_{DC}$ )		-	-	190	250	mA
Operating Input Power <sup>7</sup>	0 - 120 dB	1 - 50	-	-	Note 8	dBm
		50 - 4000	-	-	+23	

7. Total Operating Input Power from both RF In and RF Out ports. Compression level not noted as it exceeds max safe operating power level.

8. Derates linearly from +23 dBm at 50 MHz to +9 dBm at 1 MHz.

### ABSOLUTE MAXIMUM RATINGS <sup>9, 10</sup>

Operating Temperature		0°C to +50°C
Storage Temperature		-20°C to +85°C
DC Voltage @ RF Ports		16 V
$V_{USB}$ MAX		6 V
Max RF Power	1 - 50 MHz	Derates linearly from +26 dBm at 50 MHz to +12 dBm at 1 MHz
	50 - 4000 MHz	+26 dBm


9. Permanent damage may occur if any of these limits are exceeded.

10. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.




### TYPICAL PERFORMANCE GRAPHS


Attenuation Accuracy @ 0°C vs. Frequency

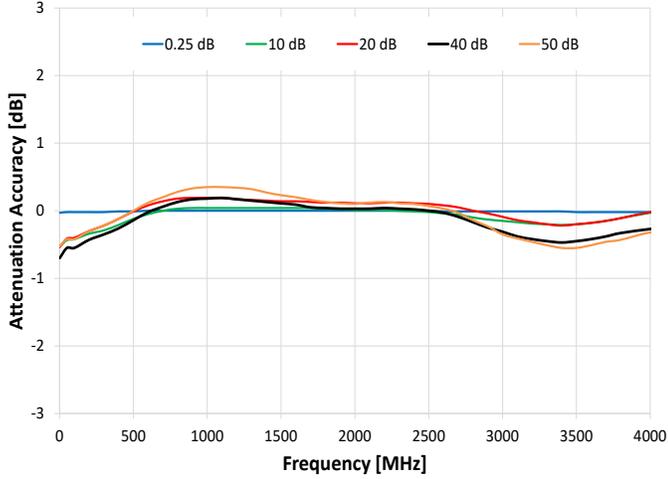


Attenuation Accuracy @ 0°C vs. Frequency

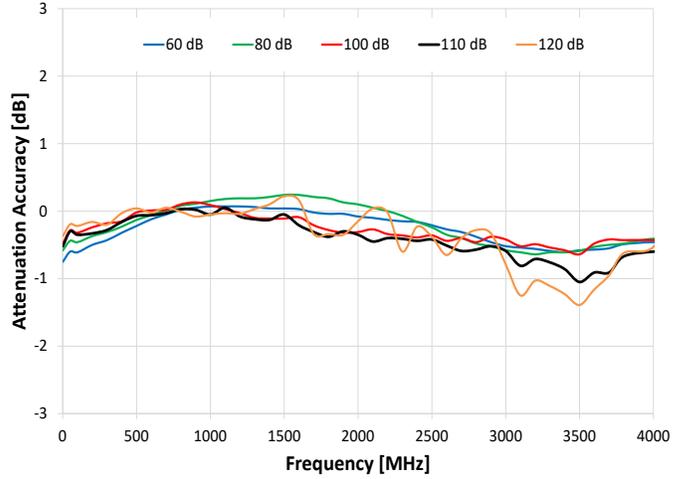


Attenuation Accuracy @ 25°C vs. Frequency

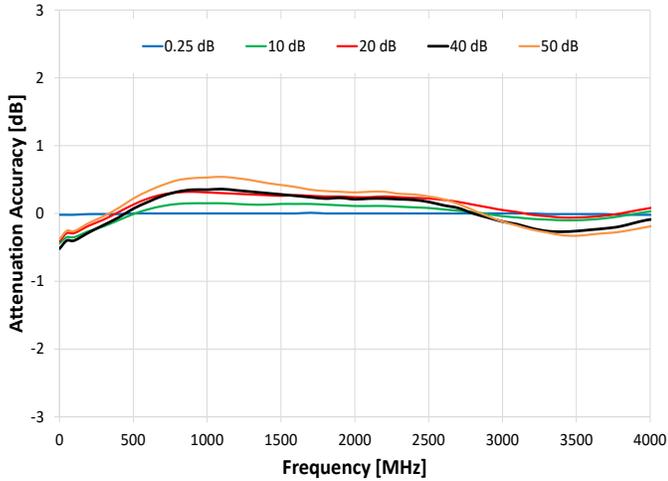


Attenuation Accuracy @ 25°C vs. Frequency

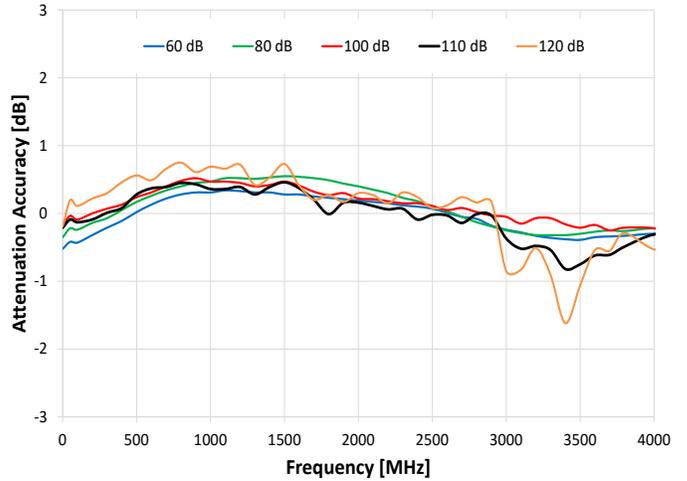

Attenuation Accuracy @ 50°C vs. Frequency

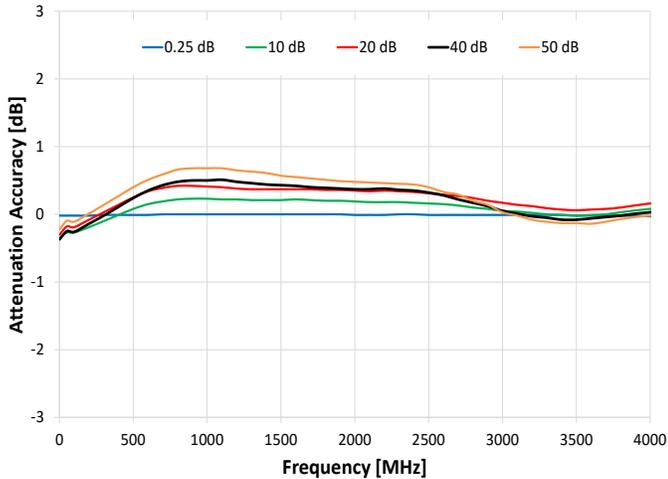


Attenuation Accuracy @ 50°C vs. Frequency

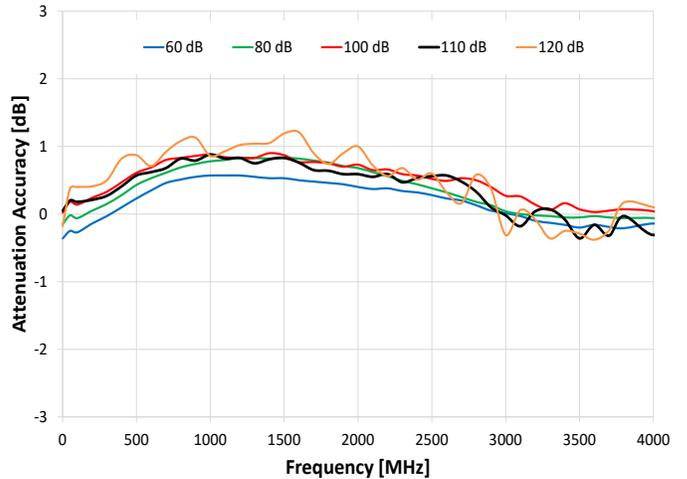




### TYPICAL PERFORMANCE GRAPHS (CONTINUED)


#### Attenuation relative to Insertion Loss vs. Frequency (at 2 dB steps)

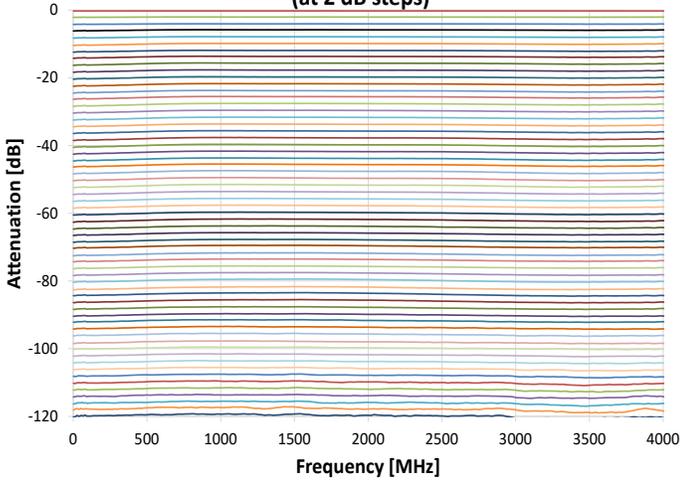


#### Insertion Loss vs. Frequency

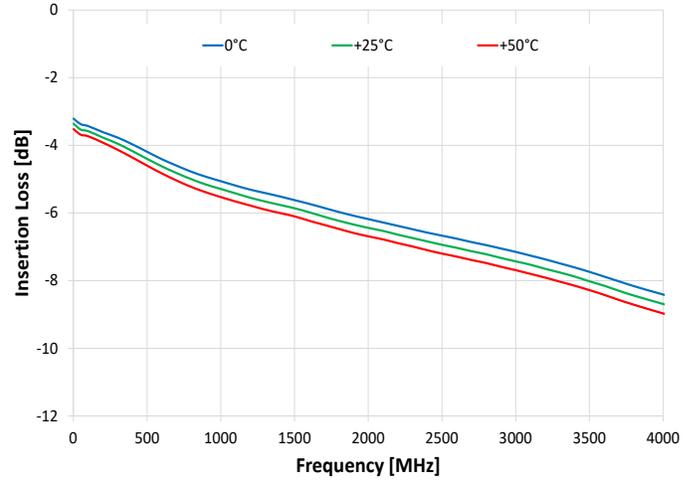


#### Return Loss In vs. Frequency

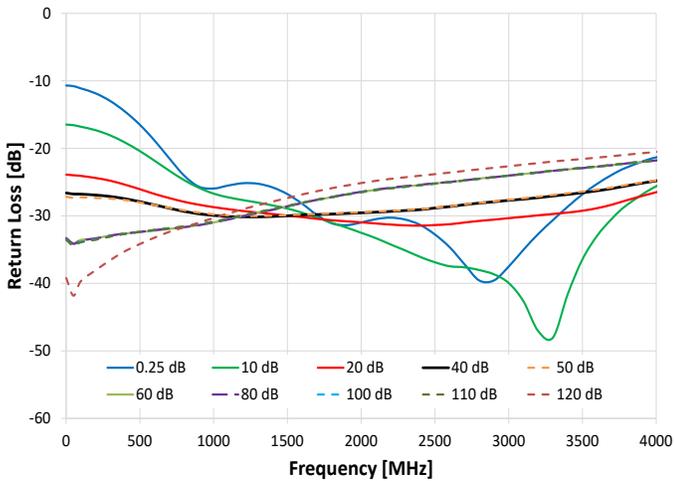

#### Return Loss Out vs. Frequency

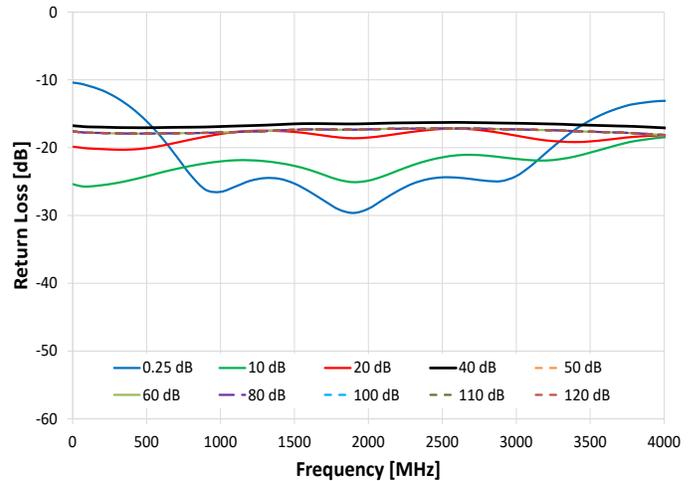

#### IP3 @ 0 dB Attenuation vs. Frequency

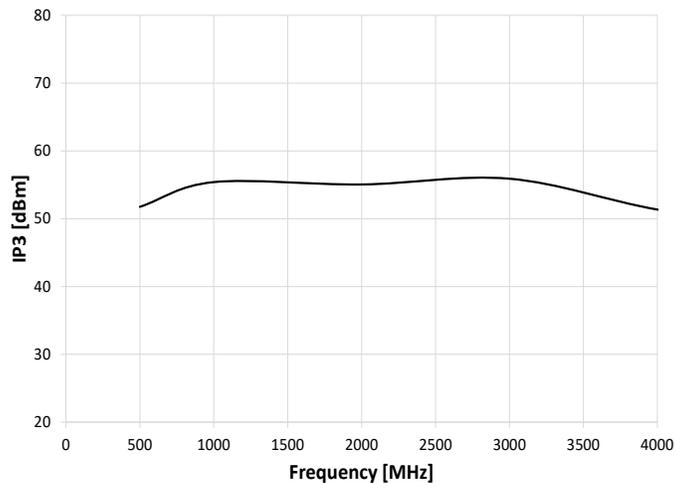



## CONTROL INTERFACES

USB Control	Protocol	HID (Human Interface Device) - Full-speed
	Min Communication Time <sup>11</sup>	3 ms typical (full transmit/receive cycle)
Ethernet Control	Supported Protocols	TCP / IP, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	10 Mbps (10 Base-T Half Duplex)

11. USB Min Communication Time is based on the polling interval of the USB HID protocol (1 ms polling interval, 64 bytes per packet), medium CPU load and no other high-speed USB devices using the USB bus.

## SOFTWARE & DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB.
- Programming / automation via Ethernet:
  - Complete set of control commands which can be sent via any supported protocol.
  - Simple to implement in the majority of modern programming environments.
- Programming / automation via USB:
  - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX.
  - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX).

Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support.


## MINIMUM SYSTEM REQUIREMENTS

GUI	Windows 7 or later
USB API DLL	Windows 7 or later and programming environment with ActiveX or .NET support
USB Direct Programming	Linux, Windows 7 or later
Hardware	Intel i3 (or equivalent) or later




### GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS - KEY FEATURES

- Connect via USB or Ethernet to control the module.
- Run GUI in "demo mode" to evaluate software without a hardware connection.

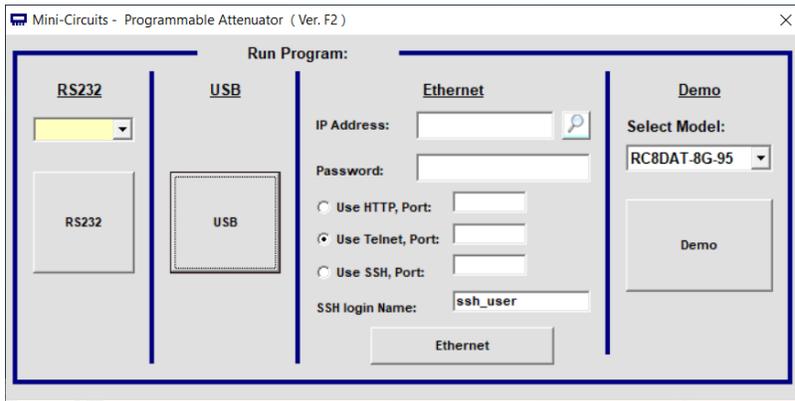


- Manual attenuation setting.
- Sweep and Hop attenuation sequences directed from the PC, or entire sequence loaded into the module.
- Attenuator address configuration and firmware upgrade.
- Attenuation at power up may be set to selected attenuation level or last attenuation state recorded.

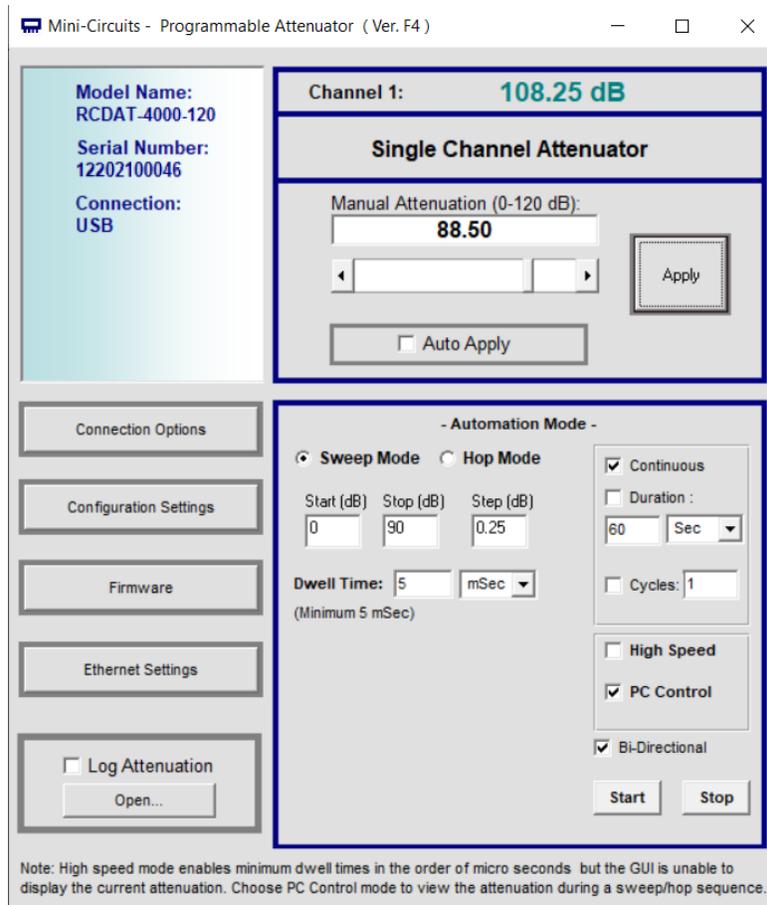




### PROGRAMMABLE ATTENUATOR RESPONSE TO COMMUNICATION INTERRUPT

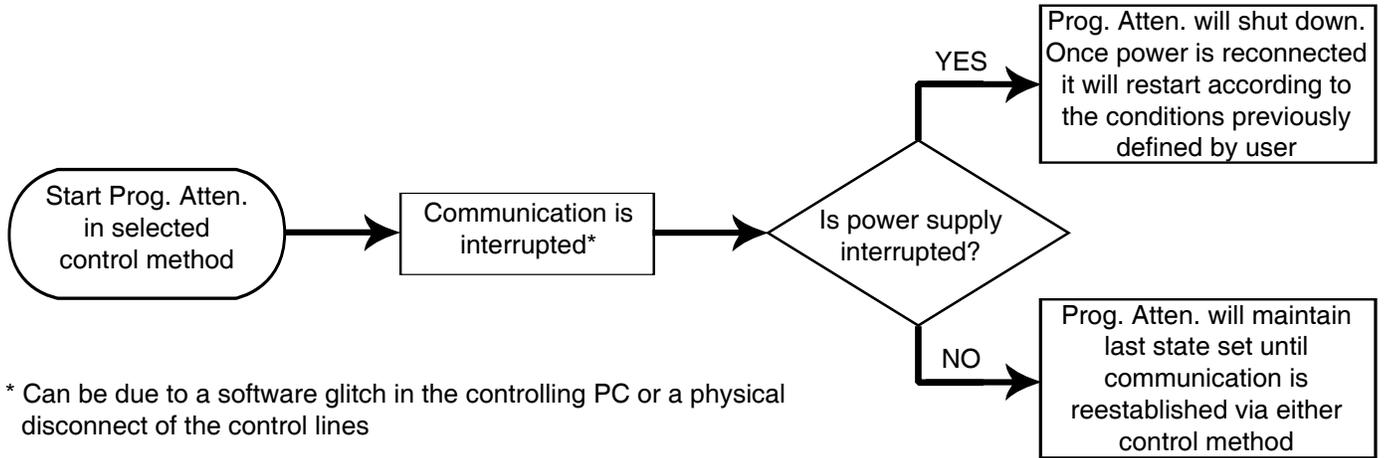

### BLOCK DIAGRAM

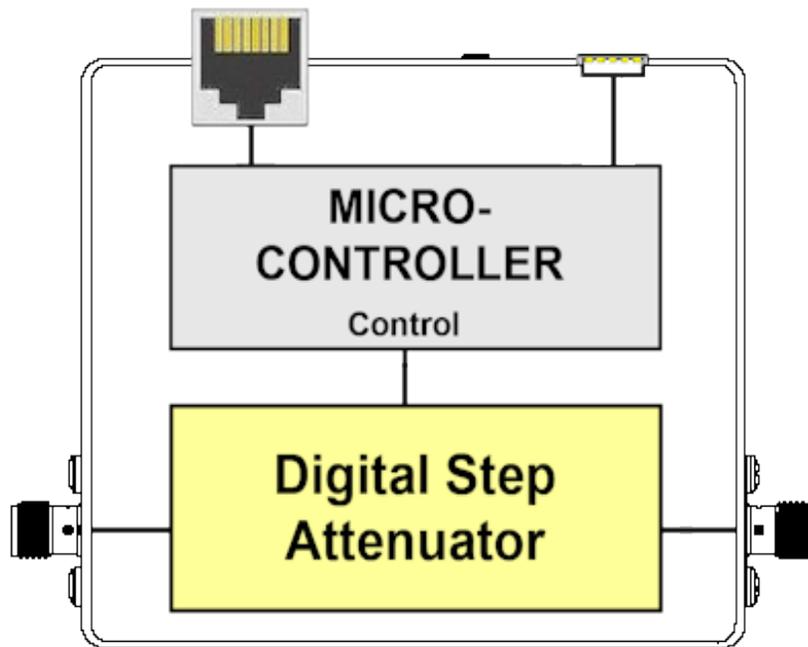



**Simultaneous, bidirectional RF signal transmission with symmetrical performance**

### CONNECTIONS

Port Name	Connector Type
RF In & Out (50Ω)	SMA female
USB	USB type Mini-B female
Ethernet	RJ45 socket



### CASE STYLE DRAWING (MS1897)

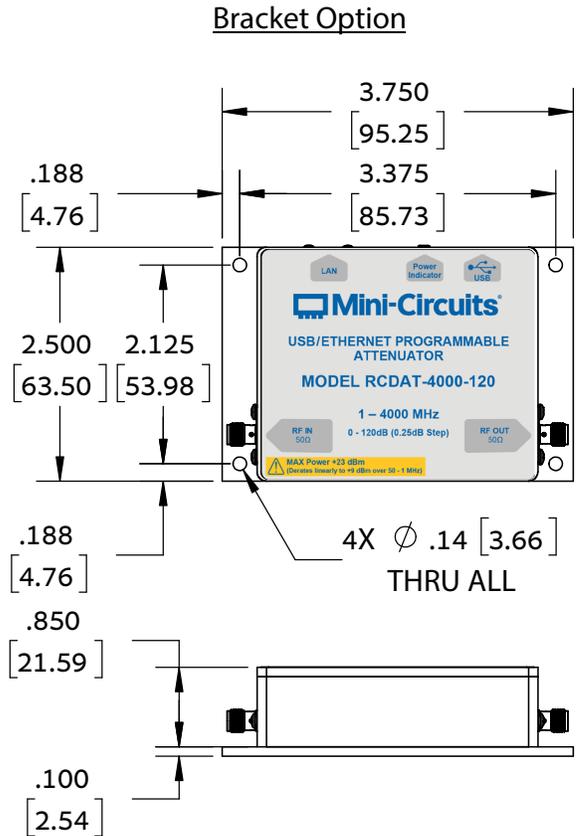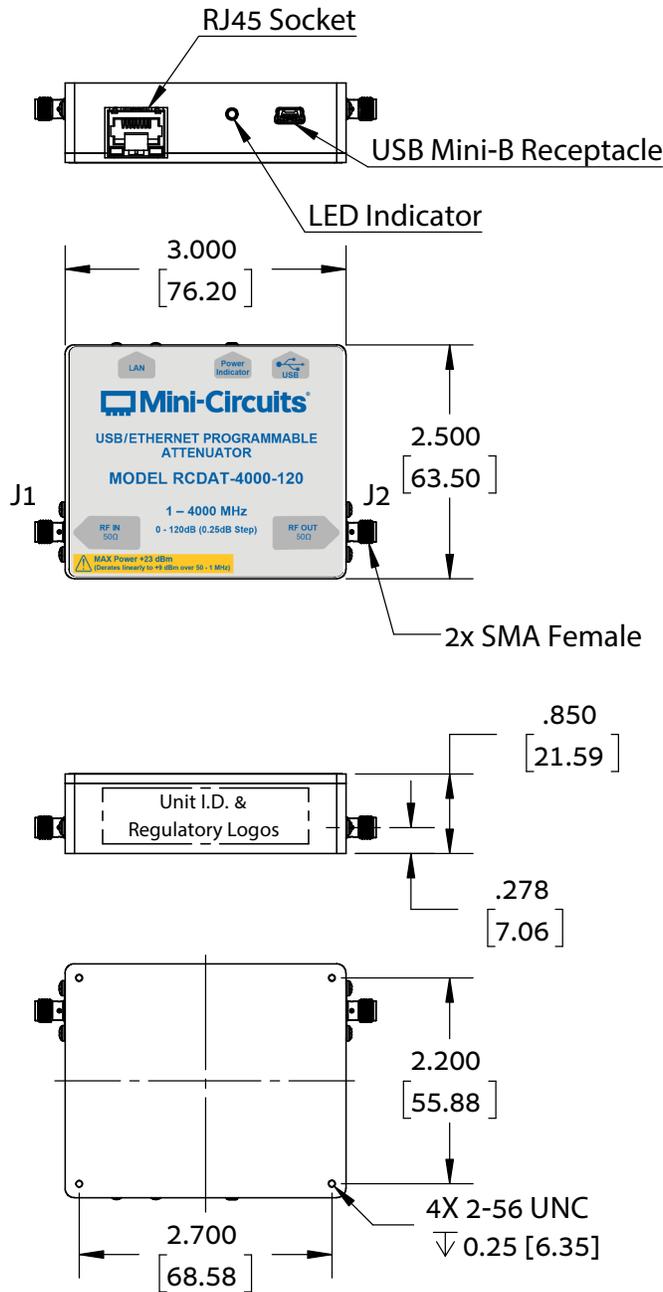

Instruction for mounting bracket:  
 1. Tool required: Phillips head screwdriver  
 2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

### NOTES:

1. Case material: Aluminum alloy.
2. Case Finish: Nickel Plate.
3. Dimensions: Inches [mm]. Tolerances 2 Pl. ±.03 inch; 3 Pl. ±.015 inch.
4. Weight: 200 grams
5. Marking may contain other features or characters for internal lot control.



DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Performance Data & Graphs	Data Graphs
Case Style	MS1897
Environmental Rating	ENV55T1
Software, User Guide & Programming Manual	<a href="https://www.minicircuits.com/softwaredownload/patt.html">https://www.minicircuits.com/softwaredownload/patt.html</a>
Regulatory Compliance	<p>Refer to user guide for compliance information</p>  <a href="https://www.minicircuits.com/app/AN49-011.pdf">https://www.minicircuits.com/app/AN49-011.pdf</a>
Support	<a href="mailto:testsolutions@minicircuits.com">testsolutions@minicircuits.com</a>

### INCLUDED ACCESSORIES <sup>12</sup>

	Part No.	Description	Qty.
	MUSB-CBL-3+	3.3 ft (1.0 m) USB cable: USB type A (Male) to USB type Mini-B (Male)	1

12. Additional quantities are available for purchase as optional accessories.

### OPTIONAL ACCESSORIES

	Part No.	Description
	MUSB-CBL-7+	6.6 ft (2.0 m) USB cable: USB type A (Male) to USB type Mini-B (Male)
	CBL-RJ45-MM-5+	5.0 ft (1.5 m) Ethernet cable: RJ45 (Male) to RJ45 (Male) Cat 5E cable
	USB-AC/DC-5+	AC/DC +5V power adaptor with USB connector <sup>13, 14</sup>
(N/A)	BKT-66-02+	Bracket kit including 3.75" x 2.50" bracket, mounting screws and washers

13. The power adaptor may be used to provide additional power via USB port when connecting several units in daisy chain control.

14. Includes power plugs for US, UK, EU, IL, AU & China. Plugs for other countries are also available. If you need a power cord for a country not listed, please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

**NOTES:**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at <https://www.minicircuits.com/terms/viewterm.html>

# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ 0°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	0.28	20.37	40.52	59.32	79.31	99.01	109.24	119.79
5	0.28	20.37	40.52	59.43	79.42	99.12	109.35	119.79
10	0.28	20.37	40.52	59.55	79.54	99.25	109.45	120.03
20	0.28	20.36	40.51	59.5	79.5	99.21	109.36	119.88
50	0.27	20.32	40.47	59.53	79.52	99.22	109.47	119.93
100	0.27	20.29	40.43	59.72	79.72	99.41	109.73	120.14
200	0.27	20.19	40.31	59.88	79.87	99.58	109.77	120.27
500	0.24	19.8	39.83	59.61	79.56	99.25	109.41	120.06
750	0.23	19.57	39.52	59.41	79.33	98.99	109.18	119.89
1000	0.23	19.54	39.44	59.64	79.54	99.18	109.39	119.77
1500	0.23	19.6	39.52	59.63	79.5	99.2	109.53	120.07
2000	0.23	19.57	39.53	59.7	79.58	99.28	109.56	120.11
2500	0.23	19.67	39.67	59.96	79.87	99.71	110.09	121.17
3000	0.22	19.64	39.7	60.02	79.99	99.82	110.02	120.34
3500	0.23	19.98	40.15	60.35	80.34	100.22	110.5	120.72
4000	0.24	20.26	40.6	60.63	80.62	100.55	110.54	121.01
4500	0.23	20.24	40.68	60.82	80.85	100.85	110.74	121.17
5000	0.22	20.19	40.55	60.86	80.85	101.1	110.91	120.3
5500	0.23	20.24	40.41	60.55	80.25	101.03	110.83	120.36
6000	0.24	20.59	40.63	60.4	79.77	100.98	110.46	120.14

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	-0.03	-0.37	-0.52	0.68	0.69	0.99	0.76	0.21
5	-0.03	-0.37	-0.52	0.57	0.58	0.88	0.65	0.21
10	-0.03	-0.37	-0.52	0.46	0.46	0.75	0.55	-0.03
20	-0.03	-0.36	-0.51	0.5	0.5	0.79	0.64	0.12
50	-0.02	-0.32	-0.47	0.47	0.48	0.78	0.54	0.07
100	-0.02	-0.29	-0.42	0.28	0.28	0.59	0.27	-0.14
200	-0.01	-0.19	-0.31	0.12	0.13	0.42	0.23	-0.27
500	0.01	0.2	0.17	0.4	0.44	0.75	0.59	-0.06
750	0.02	0.43	0.48	0.59	0.68	1.01	0.82	0.11
1000	0.02	0.46	0.56	0.36	0.46	0.82	0.61	0.23
1500	0.02	0.4	0.48	0.37	0.5	0.8	0.47	-0.07
2000	0.02	0.43	0.47	0.3	0.42	0.72	0.44	-0.11
2500	0.02	0.33	0.33	0.04	0.13	0.29	-0.09	-1.17
3000	0.03	0.36	0.3	-0.02	0.01	0.18	-0.02	-0.34
3500	0.02	0.02	-0.15	-0.35	-0.34	-0.22	-0.5	-0.72
4000	0.01	-0.26	-0.6	-0.63	-0.62	-0.55	-0.54	-1
4500	0.02	-0.24	-0.68	-0.82	-0.85	-0.85	-0.74	-1.17
5000	0.03	-0.19	-0.55	-0.85	-0.85	-1.1	-0.91	-0.3
5500	0.02	-0.24	-0.41	-0.55	-0.25	-1.03	-0.82	-0.36
6000	0.01	-0.59	-0.63	-0.4	0.24	-0.98	-0.46	-0.14

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ 0°C

FREQUENCY (MHz)	IP3 (dBm)	Insertion Loss @P <sub>IN</sub> =0 dBm (dB)	Insertion Loss @P <sub>IN</sub> =+20 dBm (dB)
1	49.76	4.29	4.12
5	53.52	4.33	4.15
10	54.31	4.41	4.21
20	56.56	4.48	4.28
50	48.03	4.05	3.93
100	47.44	4.99	4.85
200	50.13	5.16	5.02
500	57.53	5.71	5.56
750	54.95	6	5.86
1000	50.47	6.19	6.05
1500	52.31	6.64	6.51
2000	54.74	7.06	6.91
2500	53.53	7.49	7.32
3000	57.14	8.02	7.85
3500	49.21	8.45	8.23
4000	45.85	8.91	8.77
4500	45.54	8.72	8.48
5000	48.04	8.86	8.63
5500	44.67	9.36	9.14
6000	46.43	9.61	9.38

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ +25°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	0.27	20.27	40.42	59.23	79.25	98.93	109.14	119.73
5	0.27	20.27	40.42	59.33	79.34	99.02	109.26	119.82
10	0.27	20.27	40.42	59.44	79.46	99.13	109.39	119.96
20	0.27	20.26	40.41	59.39	79.42	99.1	109.3	119.69
50	0.27	20.23	40.38	59.42	79.45	99.13	109.35	119.64
100	0.27	20.21	40.36	59.65	79.67	99.36	109.62	120.12
200	0.26	20.12	40.24	59.81	79.82	99.5	109.72	120.22
500	0.24	19.7	39.72	59.5	79.46	99.1	109.36	119.78
750	0.23	19.5	39.43	59.34	79.26	98.85	109.12	119.65
1000	0.23	19.48	39.37	59.56	79.46	99.03	109.28	119.72
1500	0.23	19.55	39.47	59.58	79.49	99.09	109.31	119.92
2000	0.22	19.52	39.48	59.66	79.58	99.2	109.49	119.84
2500	0.23	19.63	39.64	59.92	79.87	99.65	109.96	120.72
3000	0.22	19.62	39.69	60	79.97	99.78	109.96	120.56
3500	0.23	19.95	40.14	60.33	80.35	100.26	110.46	121.02
4000	0.24	20.18	40.54	60.61	80.66	100.61	110.74	120.92
4500	0.23	20.13	40.56	60.78	80.86	100.92	110.87	121.26
5000	0.22	20.12	40.47	60.82	80.84	101.12	110.89	121.32
5500	0.23	20.18	40.38	60.54	80.28	101.01	110.81	120.61
6000	0.23	20.55	40.63	60.42	79.87	100.93	110.55	119.47

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	-0.02	-0.27	-0.42	0.77	0.75	1.07	0.86	0.27
5	-0.02	-0.27	-0.42	0.67	0.66	0.98	0.74	0.18
10	-0.02	-0.27	-0.42	0.56	0.54	0.87	0.61	0.04
20	-0.02	-0.26	-0.41	0.61	0.58	0.9	0.7	0.32
50	-0.02	-0.23	-0.38	0.58	0.55	0.87	0.65	0.36
100	-0.02	-0.21	-0.36	0.35	0.33	0.64	0.38	-0.12
200	-0.01	-0.12	-0.24	0.19	0.18	0.5	0.28	-0.22
500	0.01	0.3	0.28	0.5	0.54	0.9	0.64	0.22
750	0.02	0.5	0.57	0.66	0.74	1.15	0.88	0.35
1000	0.02	0.52	0.63	0.44	0.54	0.97	0.72	0.28
1500	0.02	0.45	0.53	0.42	0.51	0.91	0.69	0.08
2000	0.03	0.48	0.52	0.34	0.42	0.8	0.51	0.16
2500	0.03	0.37	0.36	0.08	0.14	0.35	0.04	-0.72
3000	0.03	0.38	0.31	0	0.03	0.22	0.04	-0.56
3500	0.02	0.05	-0.14	-0.33	-0.35	-0.26	-0.46	-1.02
4000	0.01	-0.18	-0.54	-0.61	-0.66	-0.61	-0.74	-0.92
4500	0.02	-0.13	-0.56	-0.78	-0.86	-0.92	-0.87	-1.26
5000	0.03	-0.12	-0.47	-0.82	-0.84	-1.12	-0.89	-1.32
5500	0.02	-0.18	-0.38	-0.54	-0.28	-1.01	-0.81	-0.61
6000	0.02	-0.55	-0.63	-0.42	0.13	-0.93	-0.55	0.53

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ +25°C

FREQUENCY (MHz)	Input VSWR (:1)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	2.11	1.11	1.15	1.02	1.02	1.04	1.04	1.02
5	2.11	1.11	1.15	1.02	1.02	1.04	1.04	1.02
10	2.10	1.11	1.15	1.01	1.01	1.03	1.03	1.01
20	2.10	1.11	1.15	1.01	1.01	1.03	1.03	1.01
50	2.08	1.11	1.15	1.01	1.01	1.03	1.03	1.01
100	2.03	1.11	1.15	1.00	1.00	1.03	1.03	1.01
200	1.92	1.10	1.15	1.01	1.01	1.03	1.03	1.01
500	1.47	1.08	1.13	1.01	1.01	1.03	1.03	1.01
750	1.19	1.06	1.12	1.02	1.02	1.02	1.02	1.02
1000	1.08	1.05	1.11	1.02	1.02	1.01	1.01	1.02
1500	1.11	1.02	1.08	1.04	1.04	1.02	1.02	1.04
2000	1.03	1.01	1.06	1.07	1.07	1.05	1.05	1.07
2500	1.05	1.04	1.06	1.10	1.10	1.09	1.09	1.10
3000	1.09	1.07	1.09	1.12	1.12	1.12	1.12	1.12
3500	1.36	1.07	1.11	1.13	1.13	1.15	1.15	1.13
4000	1.64	1.08	1.12	1.12	1.12	1.15	1.15	1.12
4500	1.69	1.11	1.14	1.08	1.08	1.12	1.12	1.08
5000	1.41	1.11	1.13	1.03	1.04	1.06	1.06	1.03
5500	1.54	1.17	1.16	1.10	1.10	1.06	1.06	1.10
6000	1.46	1.29	1.27	1.25	1.25	1.21	1.21	1.25

FREQUENCY (MHz)	Output VSWR (:1)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	2.20	1.12	1.04	1.02	1.02	1.02	1.02	1.02
5	2.20	1.12	1.04	1.02	1.02	1.02	1.02	1.02
10	2.19	1.12	1.03	1.01	1.01	1.01	1.01	1.01
20	2.18	1.12	1.03	1.01	1.01	1.01	1.01	1.01
50	2.17	1.12	1.03	1.01	1.01	1.01	1.01	1.01
100	2.10	1.11	1.03	1.01	1.01	1.01	1.01	1.01
200	1.99	1.11	1.03	1.02	1.02	1.02	1.02	1.02
500	1.51	1.07	1.03	1.02	1.02	1.02	1.02	1.02
750	1.21	1.03	1.03	1.02	1.02	1.02	1.02	1.02
1000	1.09	1.01	1.02	1.02	1.02	1.02	1.02	1.02
1500	1.13	1.02	1.01	1.02	1.02	1.02	1.02	1.02
2000	1.03	1.01	1.01	1.02	1.02	1.02	1.02	1.02
2500	1.11	1.00	1.03	1.02	1.02	1.02	1.02	1.02
3000	1.09	1.02	1.04	1.02	1.02	1.02	1.02	1.02
3500	1.50	1.08	1.05	1.04	1.04	1.04	1.04	1.04
4000	1.85	1.18	1.07	1.07	1.07	1.07	1.07	1.07
4500	1.79	1.23	1.10	1.12	1.12	1.12	1.12	1.12
5000	1.46	1.24	1.16	1.19	1.19	1.19	1.19	1.19
5500	1.57	1.34	1.26	1.29	1.29	1.29	1.29	1.29
6000	1.47	1.43	1.39	1.42	1.42	1.42	1.42	1.42

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ +25°C

FREQUENCY (MHz)	IP3 (dBm)	Insertion Loss @P <sub>IN</sub> =0 dBm (dB)	Insertion Loss @P <sub>IN</sub> =+20 dBm (dB)
1	48.77	4.44	4.26
5	55.78	4.48	4.29
10	54.79	4.56	4.36
20	56.87	4.63	4.43
50	47.73	4.20	4.08
100	47.31	5.12	4.99
200	50.04	5.32	5.18
500	56.98	5.94	5.80
750	55.38	6.29	6.16
1000	50.24	6.49	6.35
1500	52.38	6.97	6.84
2000	57.19	7.40	7.26
2500	54.40	7.89	7.72
3000	58.32	8.46	8.29
3500	49.13	8.83	8.68
4000	45.22	9.40	9.25
4500	45.47	9.08	8.89
5000	48.66	9.20	9.02
5500	45.30	9.68	9.52
6000	47.10	9.95	9.77

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ 50°C

FREQUENCY (MHz)	Attenuation relative to Insertion Loss (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	0.27	20.13	40.26	59.07	79.08	98.76	109.02	119.66
5	0.27	20.13	40.27	59.17	79.19	98.85	109.14	119.49
10	0.27	20.13	40.26	59.28	79.31	98.96	109.23	119.63
20	0.27	20.12	40.26	59.24	79.26	98.91	109.13	119.61
50	0.27	20.1	40.23	59.27	79.29	98.96	109.17	119.67
100	0.27	20.09	40.21	59.5	79.51	99.17	109.41	119.93
200	0.26	19.99	40.08	59.64	79.65	99.28	109.52	119.99
500	0.24	19.57	39.54	59.31	79.26	98.86	109.1	119.36
750	0.23	19.38	39.25	59.15	79.05	98.58	108.87	119.13
1000	0.23	19.37	39.21	59.37	79.24	98.78	108.98	119.45
1500	0.23	19.43	39.3	59.4	79.27	98.84	109.09	119.4
2000	0.22	19.41	39.32	59.47	79.37	98.96	109.24	119.85
2500	0.22	19.51	39.48	59.72	79.64	99.35	109.58	120.14
3000	0.22	19.53	39.55	59.79	79.75	99.48	109.61	120.07
3500	0.23	19.86	40.02	60.13	80.13	99.98	110.15	120.77
4000	0.23	20.02	40.35	60.38	80.43	100.32	110.54	120.8
4500	0.22	19.96	40.34	60.55	80.62	100.65	110.69	120.84
5000	0.22	19.98	40.27	60.6	80.58	100.79	110.68	120.72
5500	0.22	20.07	40.21	60.34	80.06	100.67	110.39	120.1
6000	0.23	20.43	40.45	60.22	79.69	100.62	110.26	119.82

FREQUENCY (MHz)	Attenuation accuracy relative to nominal attenuation setting (dB)							
	0.25 dB	20 dB	40 dB	60 dB	80 dB	100 dB	110 dB	120 dB
1	-0.02	-0.13	-0.26	0.93	0.92	1.24	0.98	0.34
5	-0.02	-0.13	-0.26	0.83	0.81	1.15	0.86	0.51
10	-0.02	-0.13	-0.26	0.72	0.69	1.04	0.77	0.37
20	-0.02	-0.12	-0.26	0.76	0.74	1.09	0.87	0.39
50	-0.02	-0.09	-0.23	0.73	0.71	1.04	0.83	0.33
100	-0.01	-0.09	-0.21	0.5	0.49	0.83	0.59	0.07
200	-0.01	0.01	-0.08	0.36	0.35	0.72	0.48	0.01
500	0.02	0.43	0.46	0.69	0.74	1.14	0.9	0.64
750	0.02	0.62	0.75	0.85	0.95	1.42	1.13	0.87
1000	0.02	0.63	0.79	0.63	0.76	1.22	1.02	0.55
1500	0.02	0.57	0.7	0.6	0.73	1.16	0.92	0.6
2000	0.03	0.59	0.68	0.53	0.63	1.04	0.76	0.15
2500	0.03	0.49	0.53	0.28	0.36	0.65	0.43	-0.14
3000	0.04	0.47	0.45	0.21	0.25	0.52	0.39	-0.07
3500	0.02	0.14	-0.01	-0.13	-0.13	0.02	-0.15	-0.77
4000	0.02	-0.02	-0.35	-0.38	-0.43	-0.32	-0.54	-0.8
4500	0.03	0.04	-0.34	-0.55	-0.62	-0.65	-0.69	-0.84
5000	0.03	0.02	-0.27	-0.6	-0.58	-0.79	-0.68	-0.72
5500	0.03	-0.07	-0.21	-0.34	-0.06	-0.67	-0.39	-0.1
6000	0.02	-0.43	-0.45	-0.22	0.31	-0.62	-0.26	0.18

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Programmable Attenuator

# RCDAT-4000-120

## Typical Performance Data @ 50°C

FREQUENCY (MHz)	IP3 (dBm)	Insertion Loss @P <sub>IN</sub> =0 dBm (dB)	Insertion Loss @P <sub>IN</sub> =+20 dBm (dB)
1	49.76	4.56	4.38
5	53.52	4.61	4.42
10	54.31	4.69	4.49
20	56.56	4.76	4.56
50	48.03	4.37	4.26
100	47.44	5.32	5.19
200	50.13	5.53	5.39
500	57.53	6.16	6.02
750	54.95	6.54	6.41
1000	50.47	6.72	6.59
1500	52.31	7.24	7.11
2000	54.74	7.69	7.55
2500	53.53	8.15	7.99
3000	57.14	8.72	8.57
3500	49.21	9.19	9.04
4000	45.85	9.72	9.57
4500	45.54	9.39	9.19
5000	48.04	9.51	9.33
5500	44.67	9.95	9.78
6000	46.43	10.22	10.04

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




# Programmable Attenuator


# RCDAT-4000-120

## Typical Performance Curves @ 0°C


**Attenuation Accuracy vs. Frequency over Attenuation settings**

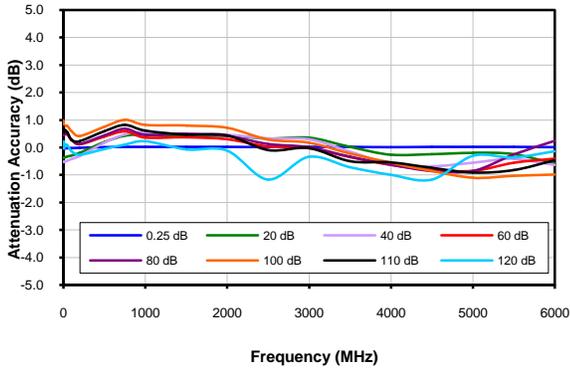


**Attenuation relative to I.L. vs. Frequency over Attenuation settings**

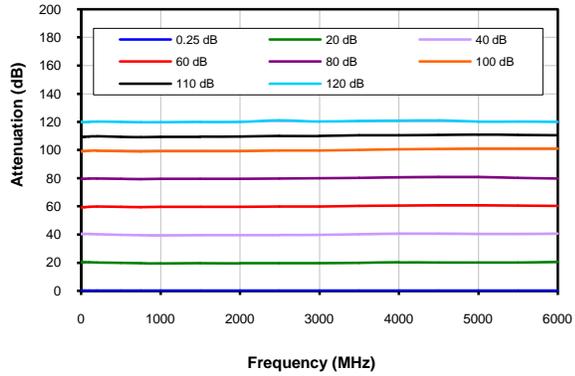

**IP3 @ 0dB Attenuation**

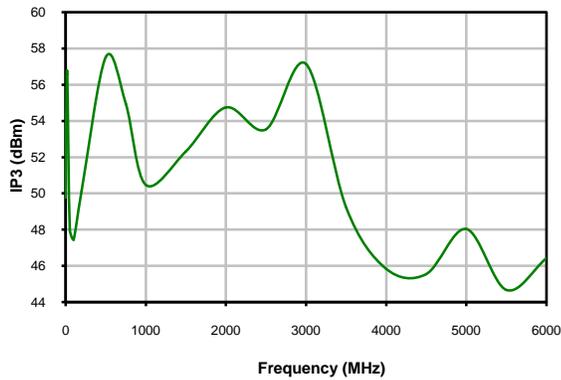

**Insertion Loss**

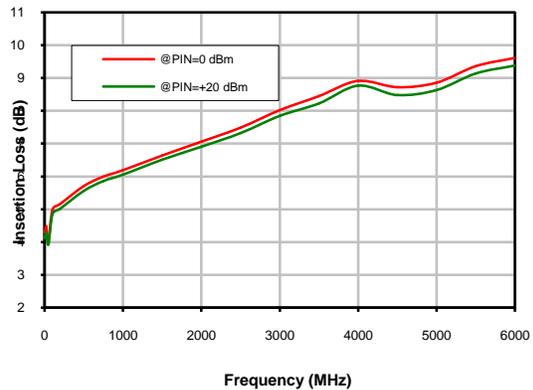

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




# Programmable Attenuator


# RCDAT-4000-120

## Typical Performance Curves @ +25°C


**Attenuation Accuracy vs. Frequency over Attenuation settings**

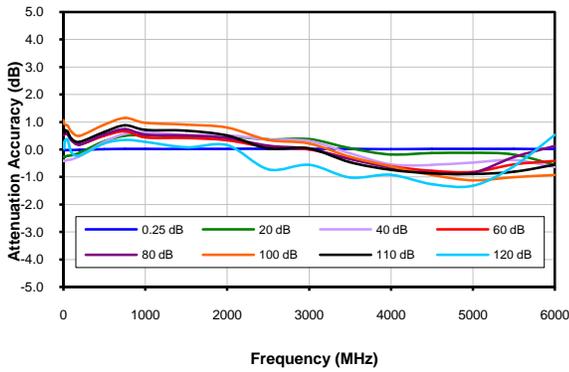


**Attenuation relative to I.L. vs. Frequency over Attenuation settings**

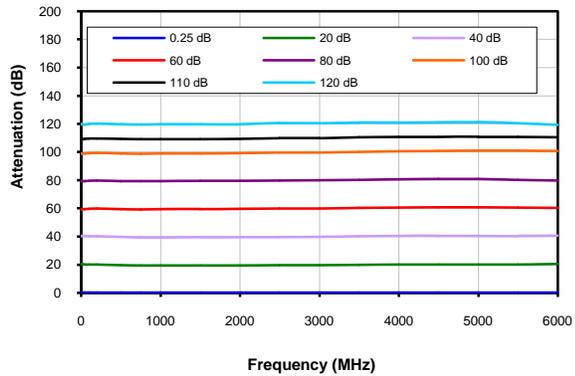


**Input VSWR vs. Frequency over Attenuation settings**

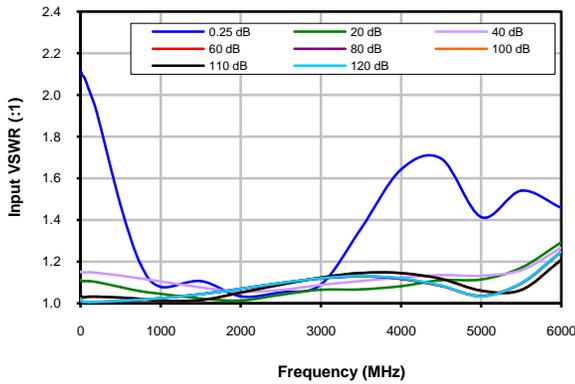


**Output VSWR vs. Frequency over Attenuation settings**

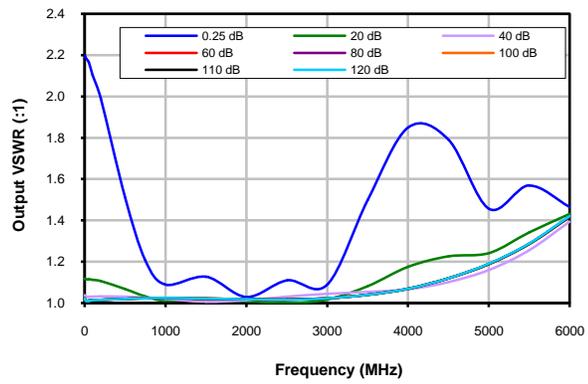

**IP3 @ 0dB Attenuation**

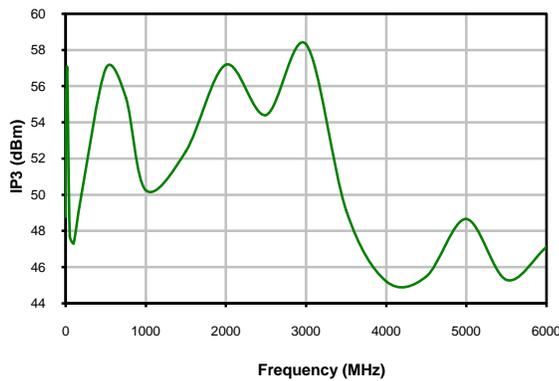

**Insertion Loss**

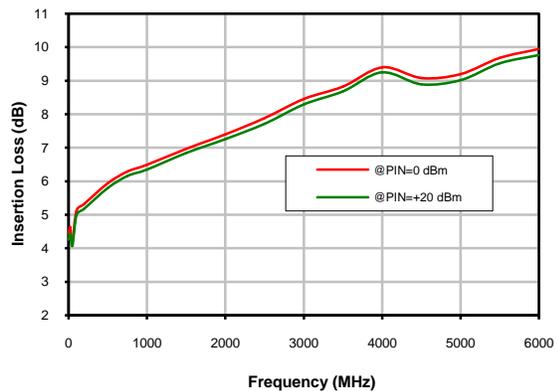

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




# Programmable Attenuator


# RCDAT-4000-120

## Typical Performance Curves @ 50°C


**Attenuation Accuracy vs. Frequency over Attenuation settings**

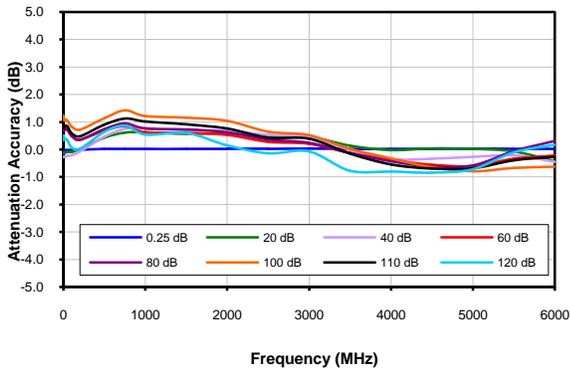


**Attenuation relative to I.L. vs. Frequency over Attenuation settings**

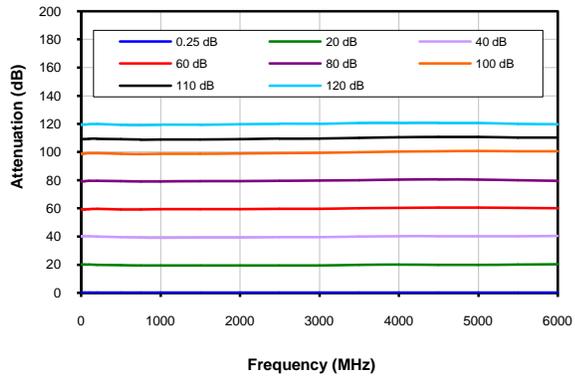

**IP3 @ 0dB Attenuation**

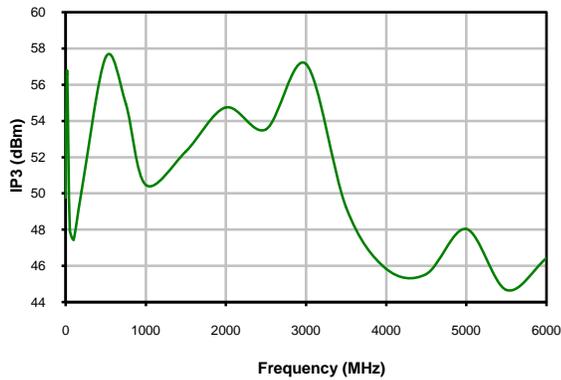

**Insertion Loss**

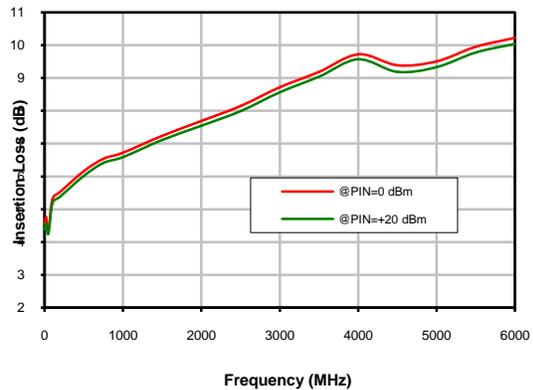


**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




## Outline Dimensions


MS1897

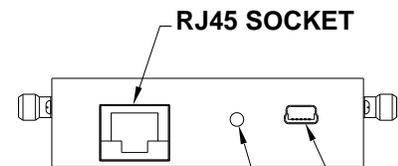


Top View

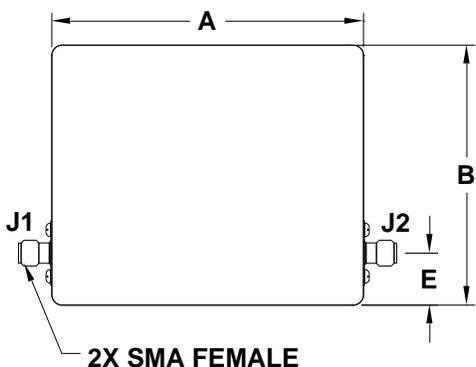

Bottom View

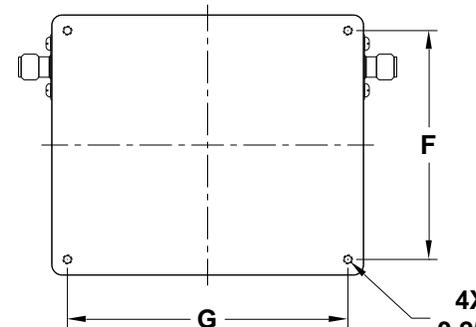

Bracket Option

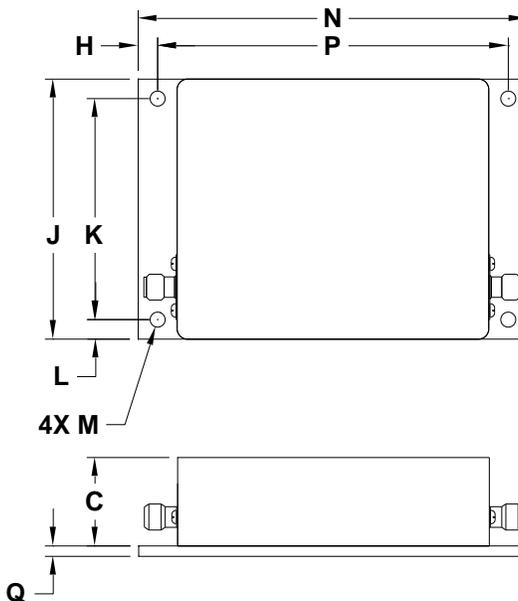

Instruction for mounting bracket:

1. Tool required: Phillips head screwdriver
2. Mount the bracket over threaded holes on the bottom side with the fasteners provided with the bracket.

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	WT. GRAMS
MS1897	3.00 (76.2)	2.50 (63.5)	.85 (21.6)	.28 (7.1)	.50 (12.7)	2.200 (55.88)	2.700 (68.58)	.188 (4.76)	2.50 (63.5)	2.125 (53.98)	.188 (4.76)	.144 (3.66)	3.75 (95.3)	3.375 (85.72)	.100 (2.54)	200

Dimensions are in inches (mm). Tolerances: 2PL. +/- .03; 3PL. +/- .015

### Notes:

1. Case material: Nickel Plated Aluminum.



ISO 9001 ISO 14001 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



Environmental Specifications **ENV55T1**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 85° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3