



Mini-Circuits

USB & ETHERNET

# Mechanical Switch Assembly ZTM-12SPDT-18

50Ω DC to 18 GHz 12 x SPDT Rack-Mount SMA Female


## THE BIG DEAL

- 12 x mechanical SPDT absorptive switches
- Convenient rack-mountable chassis
- High reliability, millions of switch cycles
- SSH secure Ethernet communication
- Software control & automation
- LED switch state indicators



Generic photo used for illustration purposes only

## FUNCTIONAL BLOCK DIAGRAM

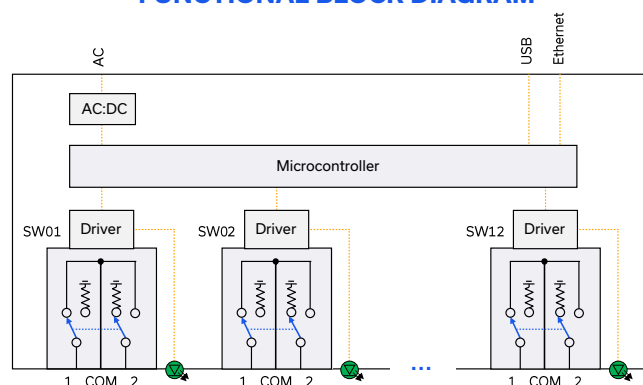

## APPLICATIONS

- Benchtop and rack-mounted automated test systems
- 5G FR1 & FR3, WiFi 6E MIMO, UWB, Bluetooth
- Military radio, radar & electronic warfare
- Quantum computing
- Switch matrices

## PRODUCT OVERVIEW

Mini-Circuits' ZTM-12SPDT-18 houses 12 independently controlled electro-mechanical SPDT switches. Each switch operates over a wide bandwidth from DC to 18 GHz with high isolation and low insertion loss. The absorptive switches are failsafe with a break-before-make configuration and lifetime of 5 million switching cycles when used within the noted specifications.

The switches are housed in a 19-inch rack chassis with all SMA (female) RF connectors on the front. LED switch state indicators on the front panel enable visual display of all switch states. The switch assembly can be controlled via USB or Ethernet (supporting SSH, HTTP and Telnet network protocols). Full software support is provided, including our user-friendly GUI application for Windows and a full API with programming instructions for Windows and Linux environments.

The modular design of the ZTM series switch rack supports easy maintenance and re-configuration in the field, without the need to return the whole system to a Mini-Circuits facility. Custom switch configurations can be configured to fit any requirement, using Mini-Circuits' online configurator tool at [www.minicircuits.com/WebStore/ztm.html](http://www.minicircuits.com/WebStore/ztm.html).

## KEY FEATURES

Feature	Advantages
Mechanical switches	Mechanical absorptive switches provide low loss, high isolation, high reliability, repeatable performance and internal termination of input signals on the disconnected paths
Flexible & modular design	Configure just the switch combination needed for your test application, with the flexibility to add or change switch modules in future as test requirements evolve.
Secure Ethernet communication	Support for SSH (Secure Shell protocol) provides a means for secure communication over Ethernet networks with strict security policies.
Fail-safe design	The switches revert to a known default state when the DC supply is removed, allowing their use in systems that must continue to operate safely in the event of power failure
Rack-mount chassis	Compact 3U height, 19" rack-mountable chassis suits integration in automated production test environments.
Integrated control & power	Easy to use on the lab bench or integrate into larger automated test systems without the need to develop custom control systems.

Mini-Circuits

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

REV. A  
ECO-025028  
ZTM-12SPDT-18  
MCL NY  
250328

PAGE 1 OF 8

**ELECTRICAL SPECIFICATIONS AT +25°C (EACH SWITCH)**

Parameter	Conditions	Min.	Typ.	Max.	Units
Frequency Range	-	DC		18	GHz
Insertion Loss	DC – 8 GHz		0.15	0.30	dB
	8 – 12 GHz		0.25	0.40	
	12 – 18 GHz		0.30	0.50	
Isolation (Inactive Paths) <sup>1</sup>	DC – 8 GHz	75	90		dB
	8 – 12 GHz	70	80		
	12 – 18 GHz	60	66		
Return Loss <sup>2</sup>	DC – 8 GHz		20		dB
	8 – 12 GHz		20		
	12 – 18 GHz		19		
Switching Time			25		ms
RF Input Power (Cold Switching)	DC-18 GHz			20	W
	Into internal termination			1	
Switch Lifetime	100 mW hot switching <sup>3</sup>		5		million cycles
	1W hot switching		1		

1. Isolation measured between Com and any disconnected port. Example: Isolation for Com to 1 is the leakage measured at port 1 from a signal input at Com when the active switch path is set to Com to 2.

2. Return loss into all ports in all states.

3. Hot switching power above this level will degrade the switch lifetime.






USB & ETHERNET

# Mechanical Switch Assembly **ZTM-12SPDT-18**

Mini-Circuits

50Ω DC to 18 GHz 12 x SPDT Rack-Mount SMA Female

## TYPICAL PERFORMANCE GRAPHS

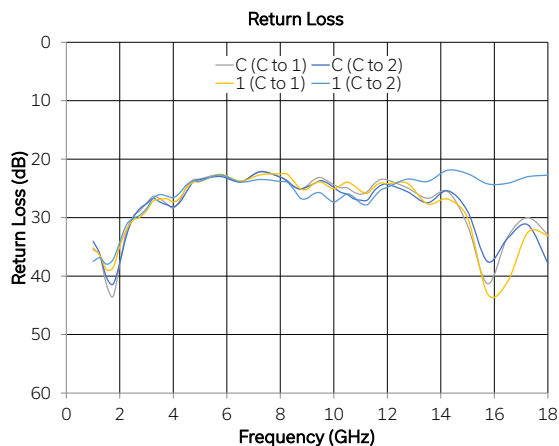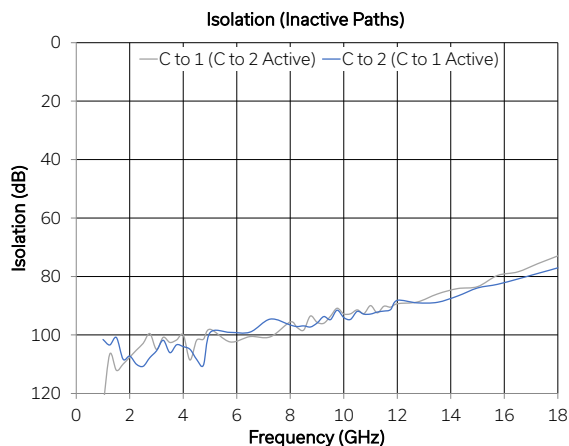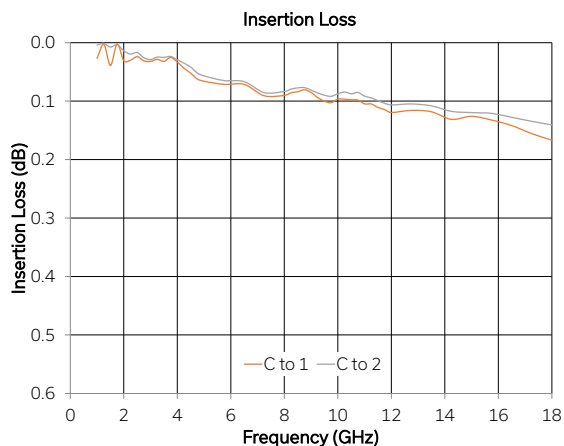

**CONTROL INTERFACES**

Ethernet Control	Supported Protocols	TCP / IP, SSH, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	100 Mbps (100Base-T Full Duplex)
USB Control	Supported Protocols	HID – High Speed
	Min Communication Time <sup>4</sup>	400 μs typ

4. Based on the polling interval of the USB HID protocol (125 μs with 64 bytes per packet) and no other significant CPU or USB activity

**SOFTWARE & DOCUMENTATION**

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB
- Programming / automation via Ethernet
  - Complete set of control commands which can be sent via any supported protocol – simple to implement in the majority of modern programming environments
- Programming / automation via USB
  - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX
  - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX)

Please contact [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com) for support

**MINIMUM SYSTEM REQUIREMENTS**

Hardware	Intel i3 (or equivalent) or later
GUI (USB or Ethernet Control)	Windows 7 or later
USB API DLL	Windows 7 or later with support for Microsoft .Net Framework or ActiveX
USB Direct Programming	Windows 7 or later; Linux
Ethernet	Windows, Linux or macOS with Ethernet TCP / IP support

**PROGRAMMING COMMANDS**


The key ASCII / SCPI commands for control of the system for control via the Ethernet or USB API are summarized below (refer to the programming manual for full details):

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
:SPDT:[sw_label]:STATE:[port]	Set a single switch state: <ul style="list-style-type: none"> <li>• [sw_label] = Switch number (1 to 12)</li> <li>• [port] = The port to be connected to Com of the specified switch (1 or 2)</li> <li>• Example :SPDT:1:STATE:2</li> </ul>
:SPDT:[sw_label]:STATE?	Get the state of all switches: <ul style="list-style-type: none"> <li>• [sw_label] = Switch number (1 to 12)</li> <li>• Example :SPDT:1:STATE?</li> </ul>




## GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS - KEY FEATURES

- Connect via USB or Ethernet
- Run GUI in "demo mode" to evaluate software without a hardware connection

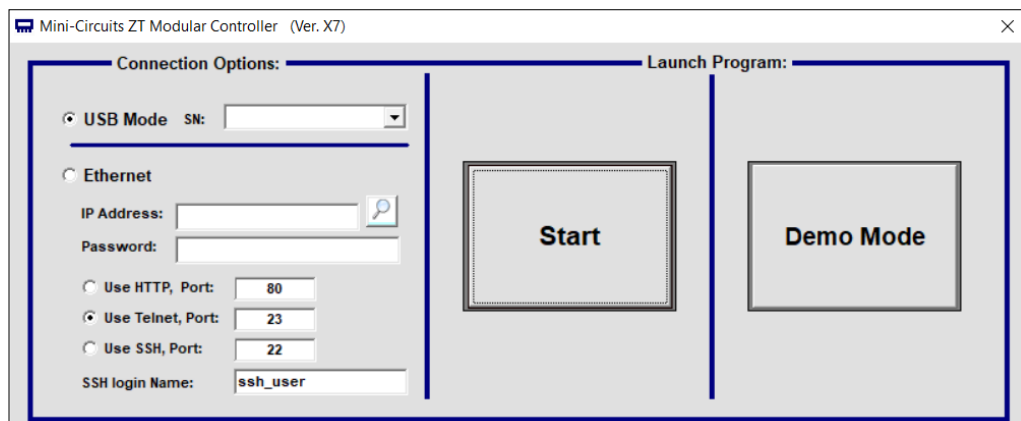

- View and set all switch states at the click of a button
- Set switch power-up states
- Configure Ethernet settings
- Update firmware

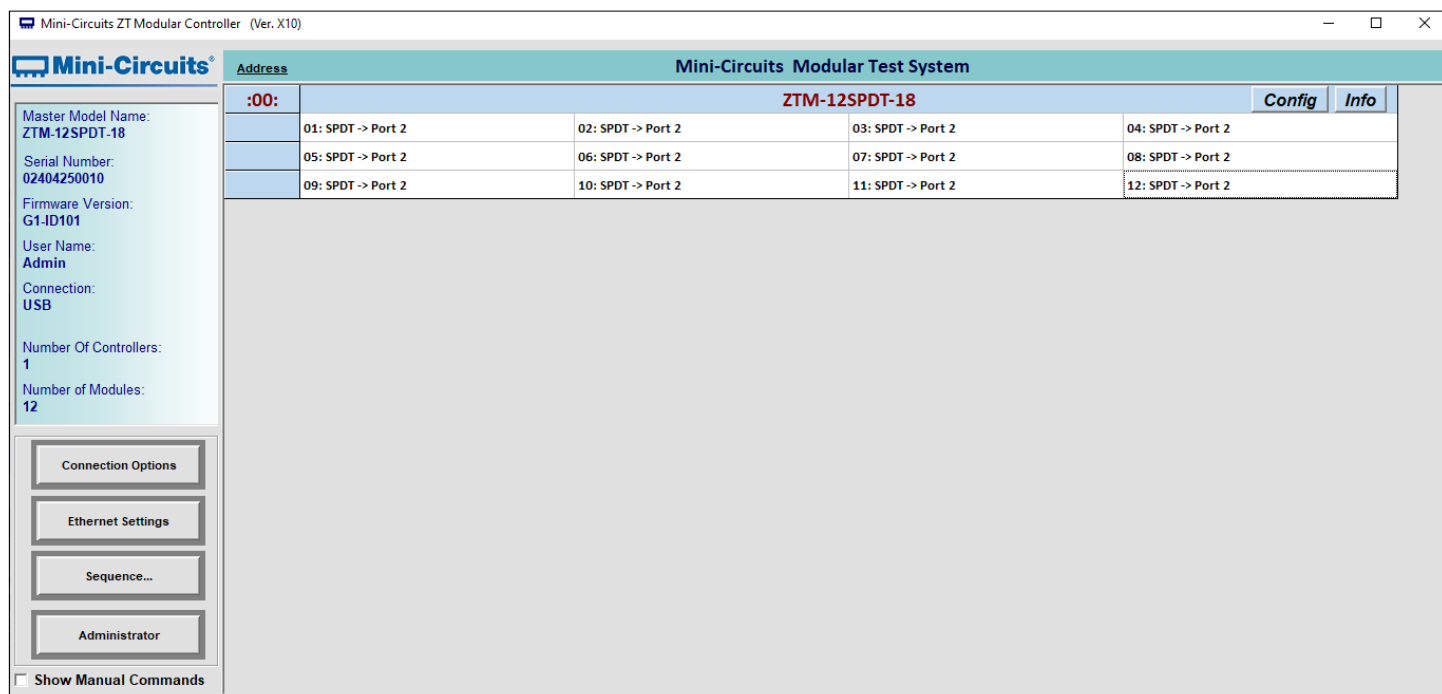

Mechanical Switch Assembly **ZTM-12SPDT-18**

50Ω DC to 18 GHz 12 x SPDT Rack-Mount SMA Female

## ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	
Input Power (No Damage)	Cold switching	20	W
	Hot switching	1	
	Into internal termination	1	

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

## POWER SUPPLY


Power Supply	AC mains input: 100-240 V, 50 / 60 Hz
Fuse	2 A, 250 V rating
Power Consumption	300 W maximum

## CONNECTIONS

Port	Connector
COM & 1-2 (each SPDT)	SMA female
USB	USB type B
Ethernet / LAN	RJ45
AC Input	IEC C14 inlet

COM = Common port  
1-2 = input / output ports

## FUNCTIONAL BLOCK DIAGRAM

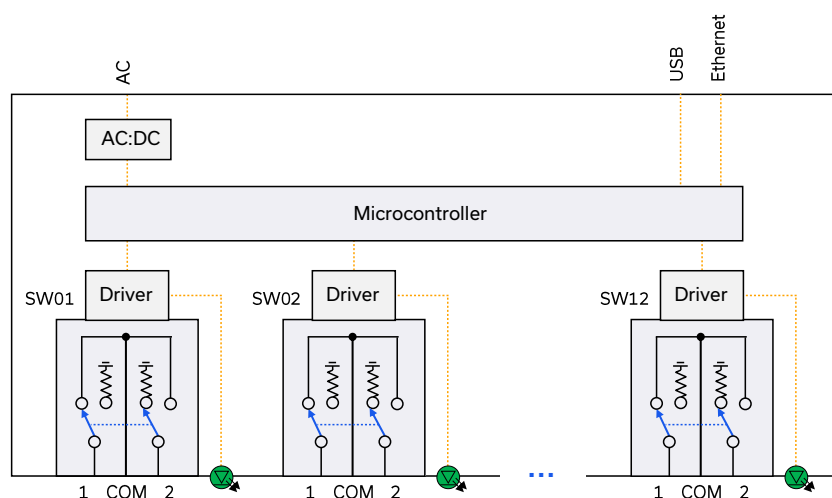

## SWITCH STATE TABLE (EACH SWITCH)

Switch Command	Switch x State	Switch x LED State
:SPDT:[x]:STATE:1	COM to 1	Green
:SPDT:[x]:STATE:2	COM to 2	Orange

## POWER-UP OPTIONS

Mode	Initial Switch Paths
Default	All switches power up in the default state (COM to 1)
Last States	All switches resume the previous state from the point of last power supply disconnection

All switches revert to the default state when the power supply is turned off or disconnected.



USB & ETHERNET


# Mechanical Switch Assembly

**ZTM-12SPDT-18**

Mini-Circuits

50Ω DC to 18 GHz 12 x SPDT Rack-Mount SMA Female

## CASE STYLE DRAWING

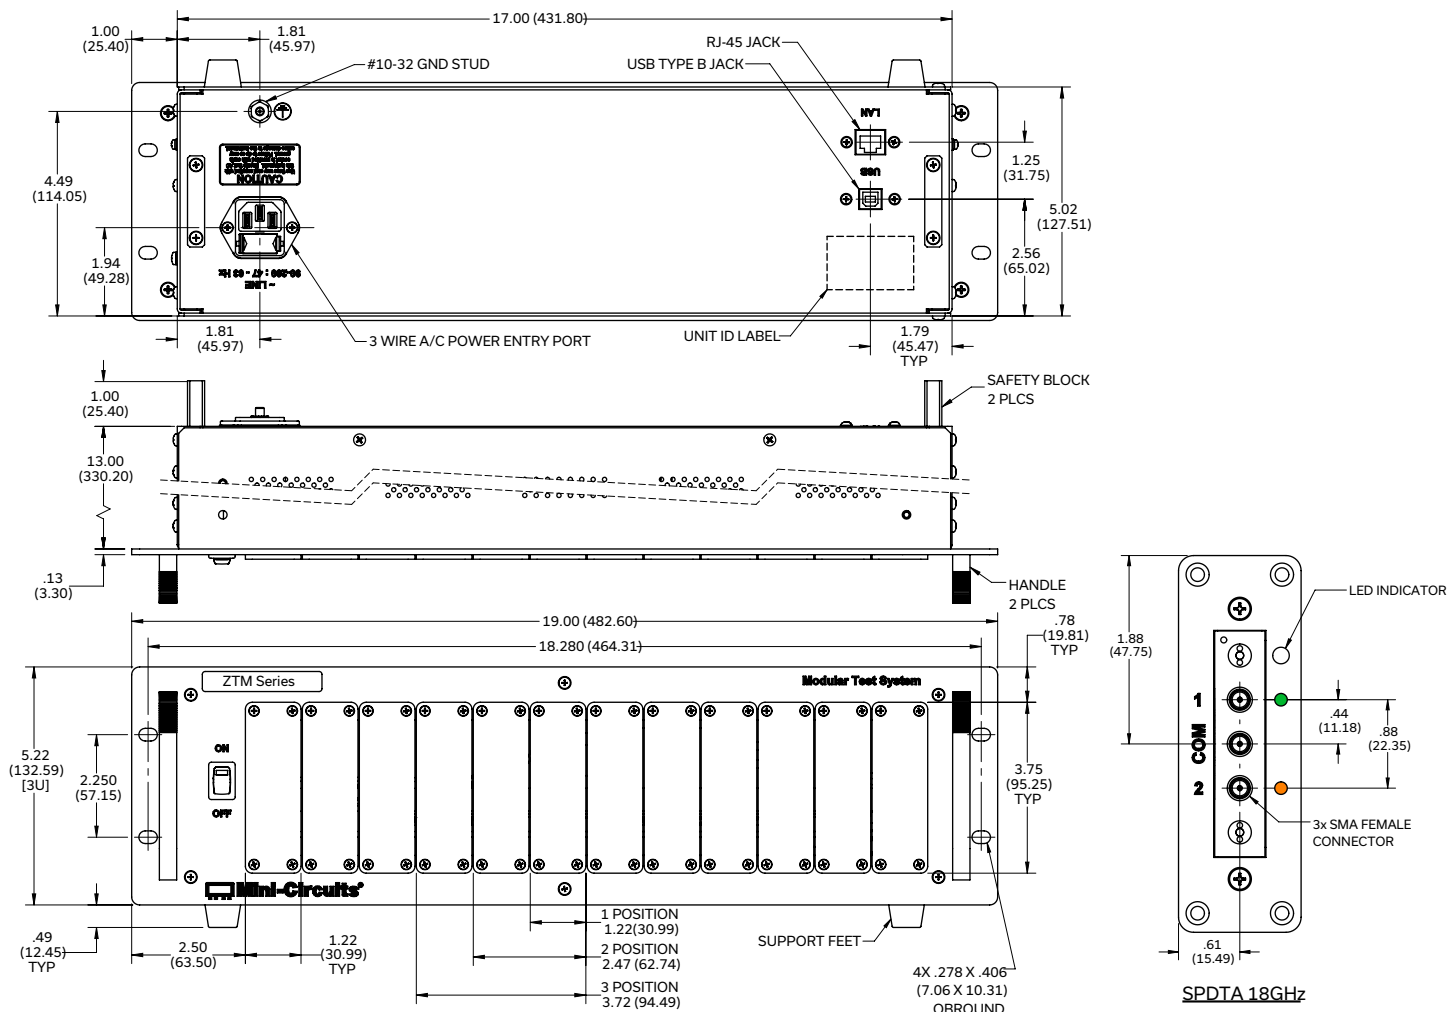

Case material: Aluminum (with protective coating to prevent corrosion).  
 Weight: 4535 grams.  
 Dimensions are in inches (mm). Tolerances: 2 Pl.±.03 inch; 3 Pl.±.015 inch.

## PRODUCT MARKING\*

Product Marking: ZTM-12SPDT-18

Product Description: Modular Test System

Unit ID Label: Serial number and other identification marks

\*Marking may contain other features or characters for internal lot control

Mini-Circuits



## USB & ETHERNET

# Mechanical Switch Assembly **ZTM-12SPDT-18**




Mini-Circuits






50Ω DC to 18 GHz 12 x SPDT Rack-Mount SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	YD2891
Software, User Guide & Programming Manual	<a href="http://www.minicircuits.com/softwaredownload/ztm_ztm2.html">www.minicircuits.com/softwaredownload/ztm_ztm2.html</a>
Environmental Rating	ENV55
Regulatory Compliance	<p>Refer to our website for compliance methodologies and qualifications</p>  <a href="http://www.minicircuits.com/quality/environmental_introduction.html">www.minicircuits.com/quality/environmental_introduction.html</a>

Contact Us: [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

Included Accessories	Part Number	Description
	CBL-3W-xx	AC power cord (IEC C13 connector to local plug) Select one option from the list below. Please contact <a href="mailto:testsolutions@minicircuits.com">testsolutions@minicircuits.com</a> if your region is not listed.
	USB-CBL-AB-7+	USB cable (6.8ft) type A to type B
	CBL-RJ45-MM-5+	Ethernet cable (5 ft)
	HT-4-SMA	SMA connector wrench (4" length)

AC Power Cord Options	Part Number	Description
	CBL-3W-US	USA NEMA 5-15 plug (type B) to IEC C13 connector
	CBL-3W-EU	Europe CEE 7/7 plug (type E/F) to IEC C13 connector
	CBL-3W-UK	UK BS-1363 plug (type G) to IEC C13 connector
	CBL-3W-AU	Australia & China AS/NZS 3112 plug (type I) to IEC C13 connector
	CBL-3W-IL	Israel SI-32 plug (type H) to IEC C13 connector

### NOTES


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)





## Outline Dimensions

YD2861

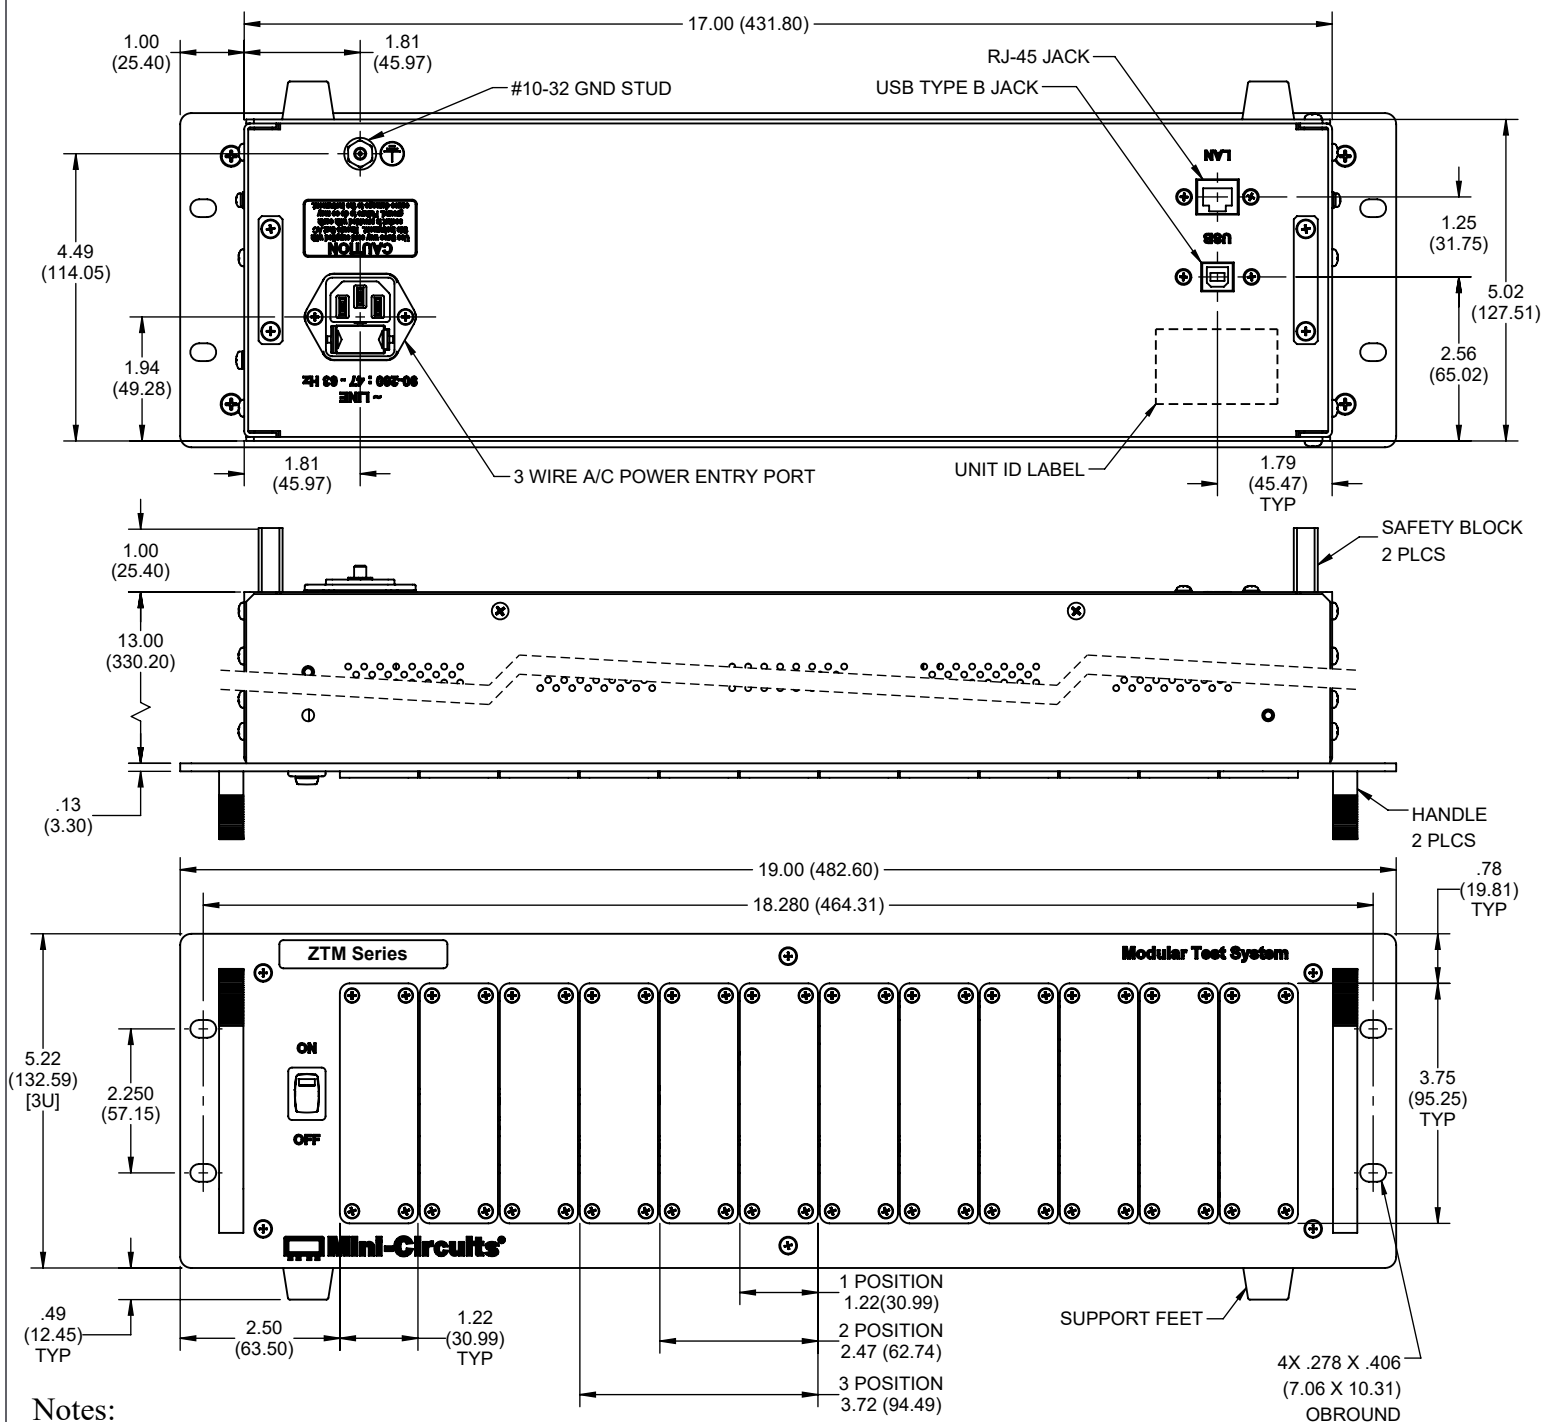

### Notes:

1. Case material: Aluminum (with protective coating to prevent corrosion).
2. Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .03$  inch; 3 Pl.  $\pm .015$  inch.
3. Weight: 4535 grams.
4. Marking may contain features or characters for internal lot control.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)


RF/IF MICROWAVE COMPONENTS

## SPDT Switch Options:


YD2861

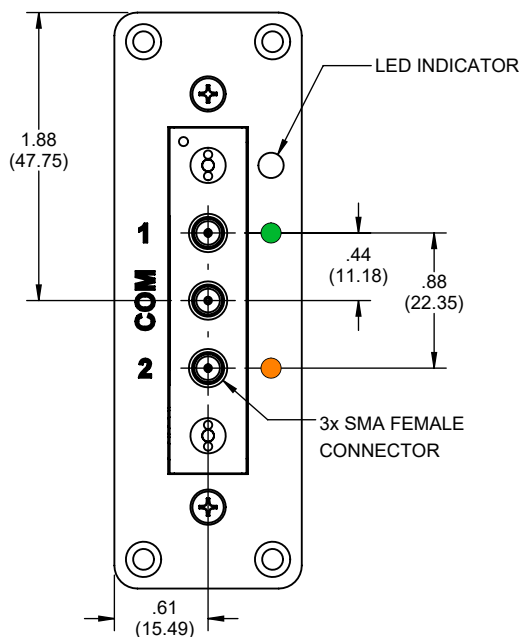

**SPDTA 18GHz**

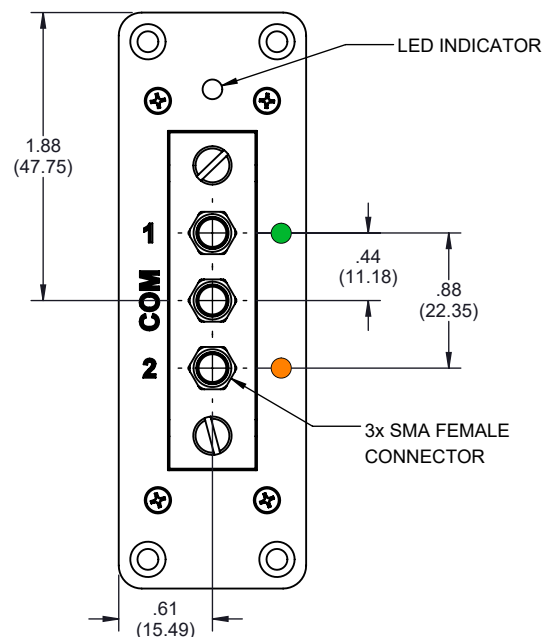

**SPDTA 26GHz**

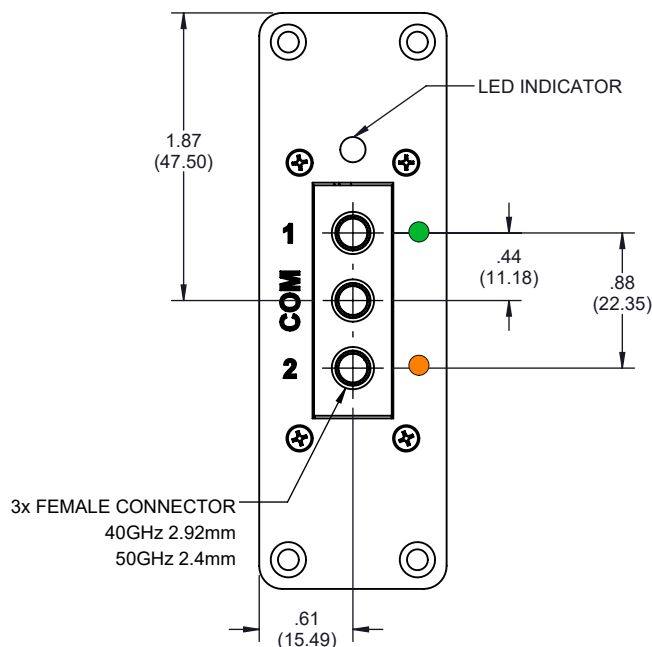

**SPDT 40GHz**

**SPDT 50GHz**

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)


RF/IF MICROWAVE COMPONENTS

## MTS (Transfer) Switch Options:


YD2861

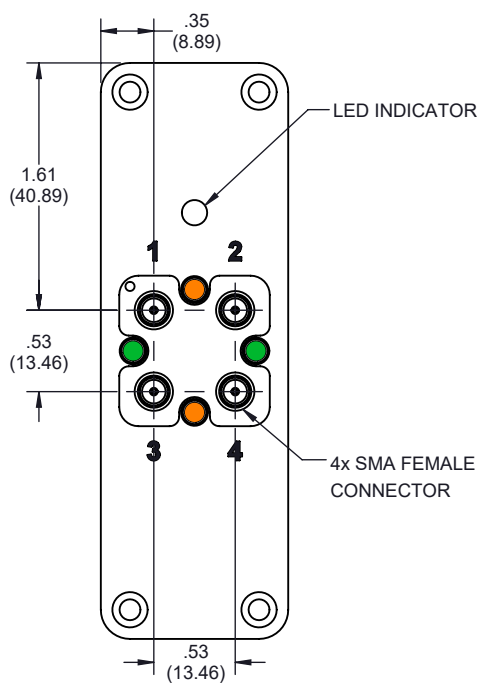


**MTS 18GHz**

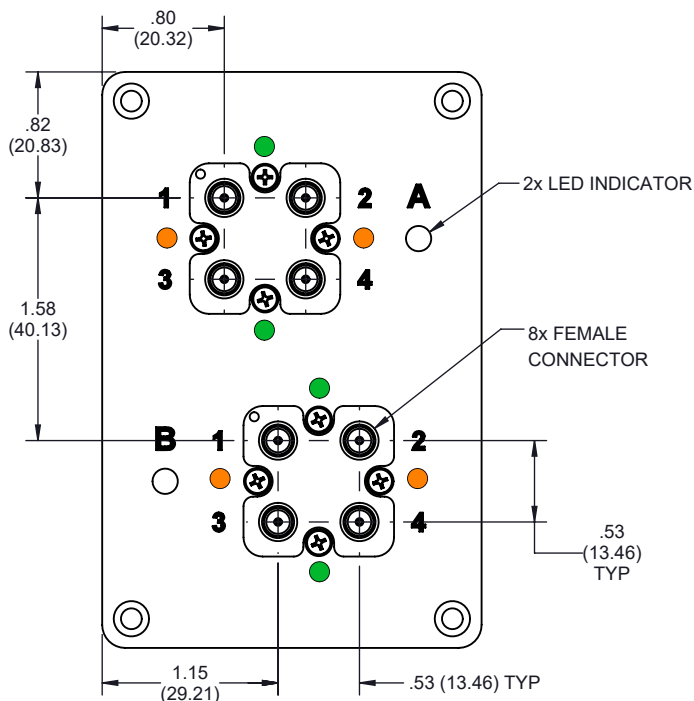

**MTS 18GHz**

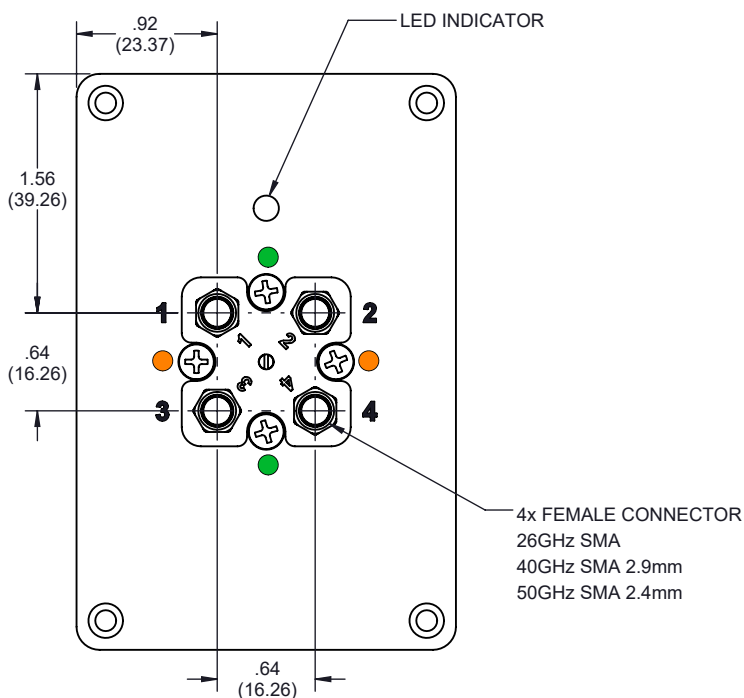

**MTS 26GHz**  
**MTS 40GHz**  
**MTS 50GHz**

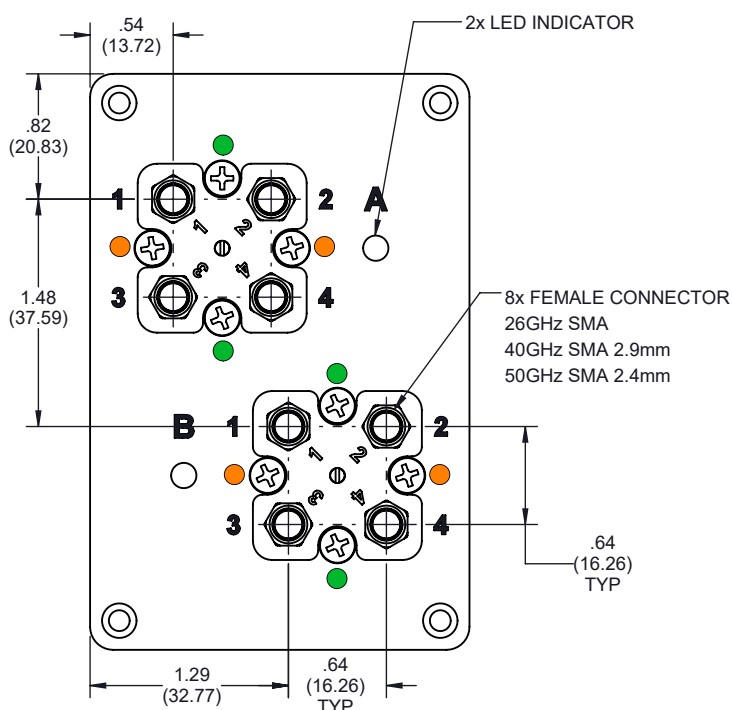

**MTS 26GHz**  
**MTS 40GHz**  
**MTS 50GHz**

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)


RF/IF MICROWAVE COMPONENTS

## SP4T and SP6T Switch Options:

YD2861

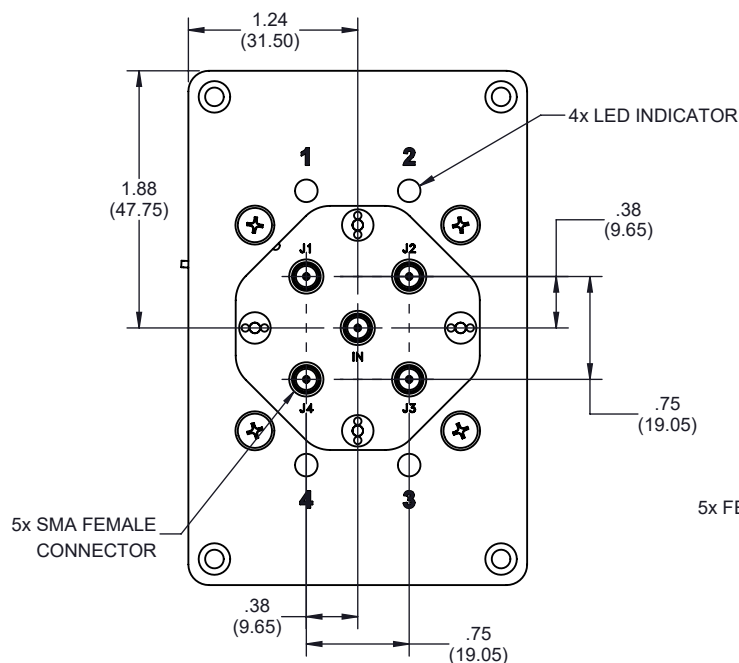


**SP4TA 18GHz**

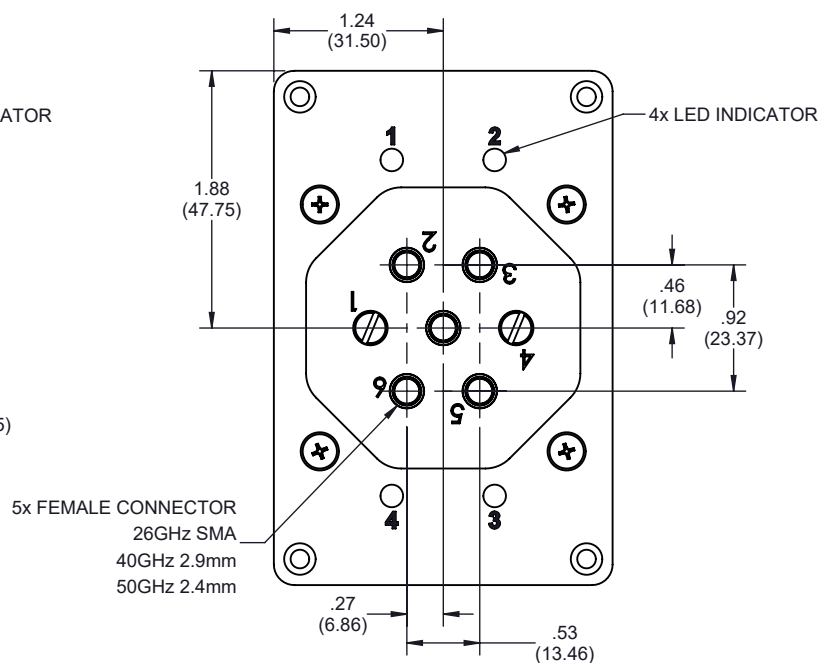

**SP4TA 26GHz**


**SP4TA 40GHz**

**SP4TA 50GHz**

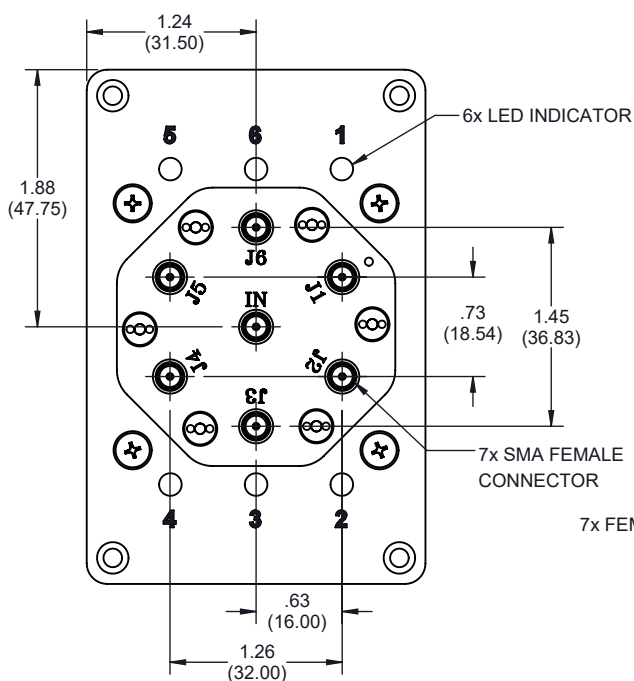

**SP6TA 12GHz**

**SP6TA 18GHz**

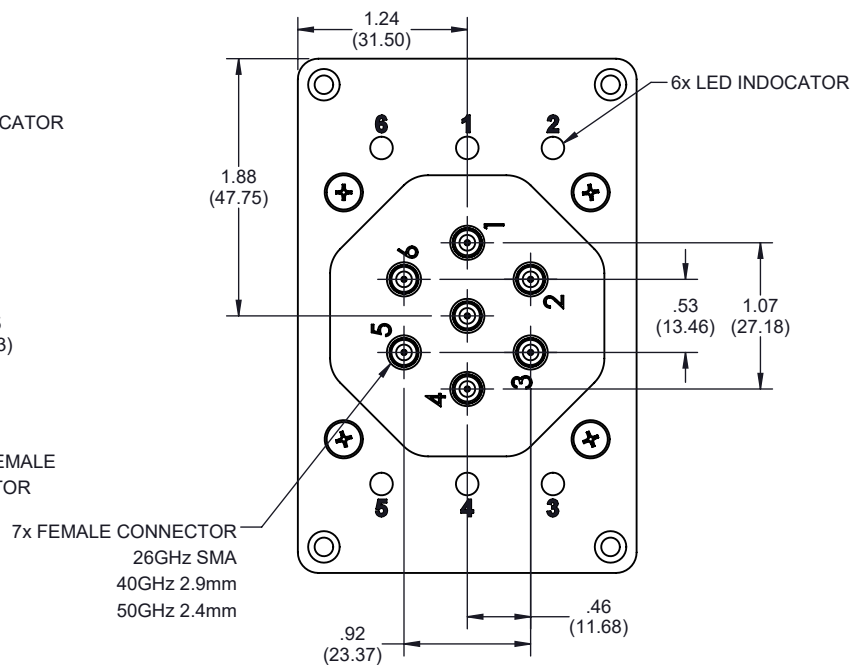

**SP6TA 26GHz**

**SP6TA 40GHz**

**SP6TA 50GHz**

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)


RF/IF MICROWAVE COMPONENTS

## SP8T Switch Options:

YD2861

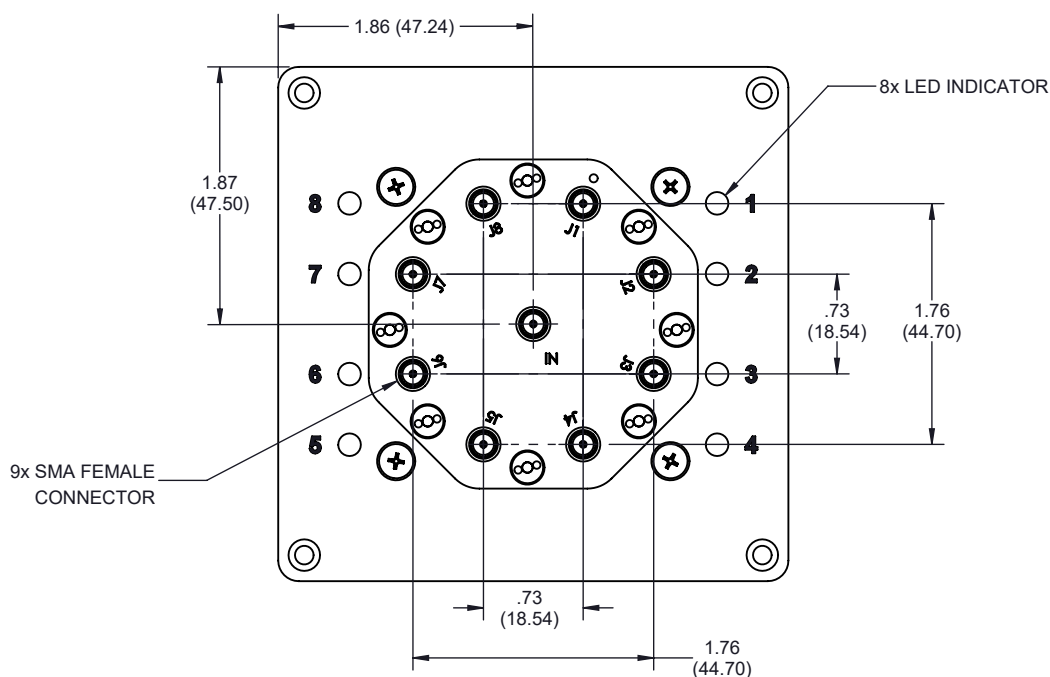

**SP8TA 12GHz**

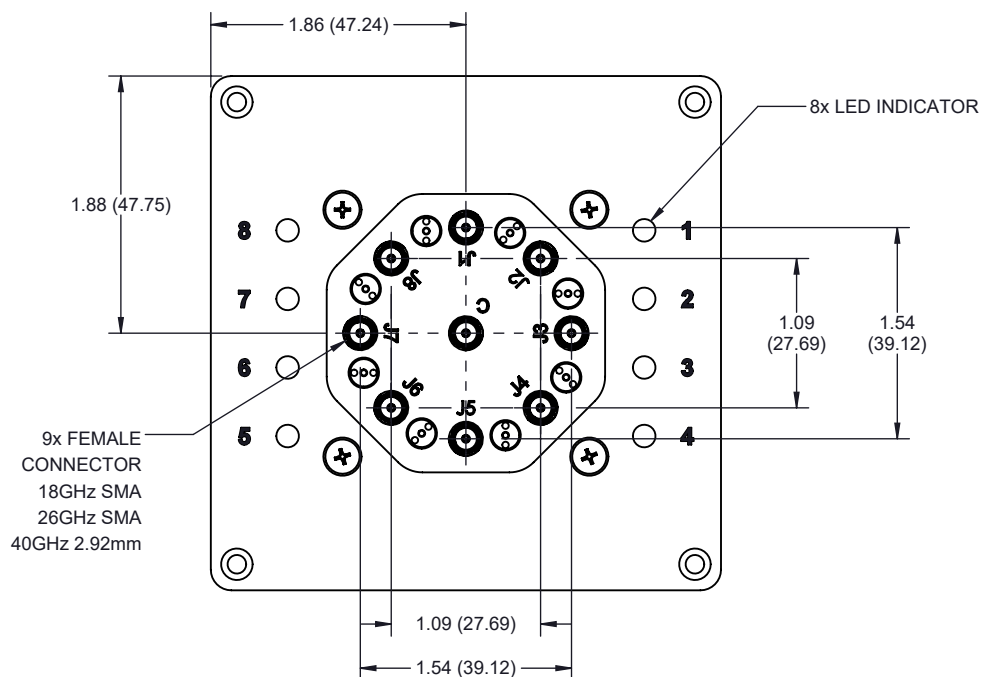

**SP8TA 18GHz**

**SP8TA 26GHz**

**SP8TA 40GHz**



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

## SP12T Switch Options:

YD2861

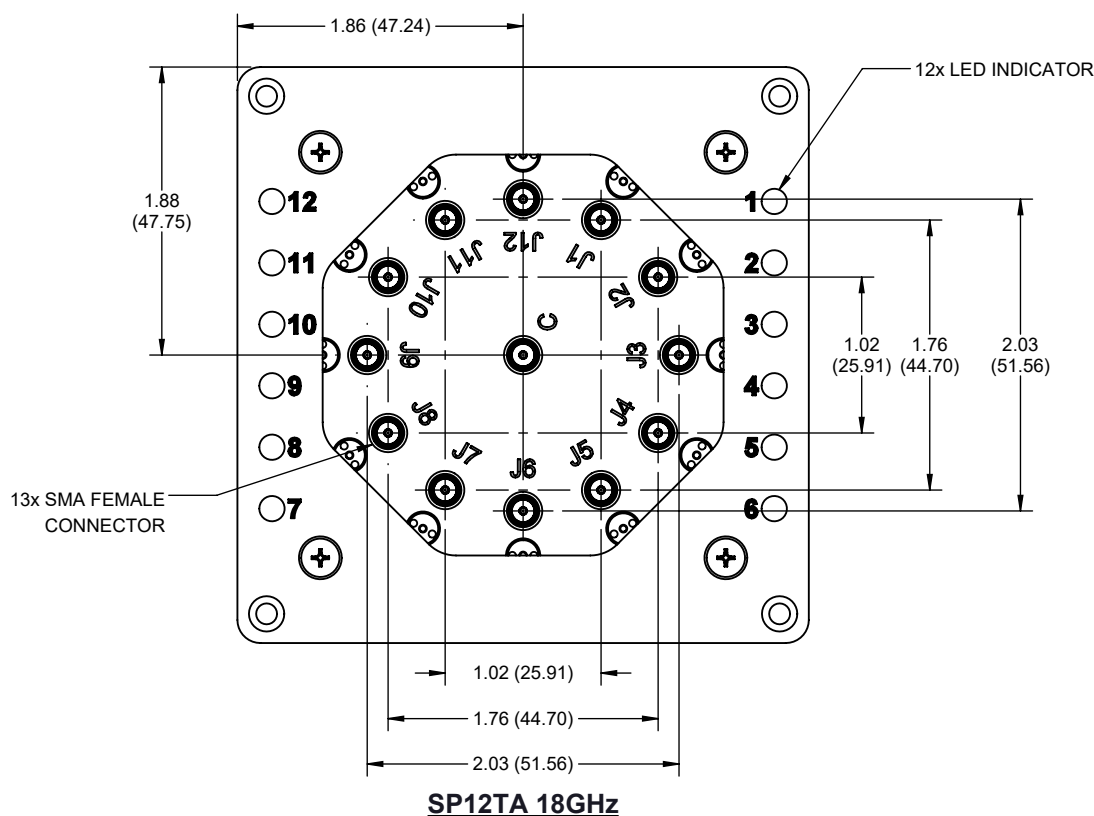

**Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

## RUDAT Options:

YD2861

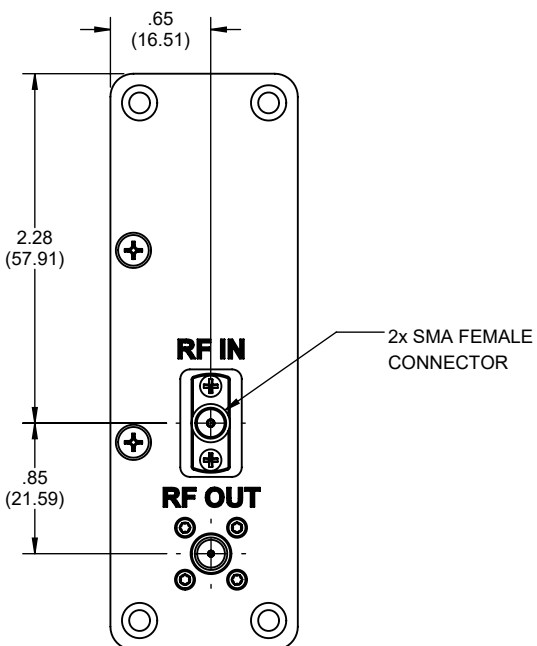

**RUDAT 6GHz 110dB**



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



## Environmental Specifications ENV55

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-0° to 50° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-20° to 60° C Ambient Environment	Individual Model Data Sheet
Operating and Storage Humidity	5% to 85% RH (non-condensing)	Ambient
Bench Handling Test	Bench Top Tip 45° & Drop	MIL-PRF-28800F
Transit Drop Test	Free Fall Drop, 20 cm (7.9 inches)	MIL-PRF-28800F Class 3