



LUMPED LC SURFACE MOUNT

Bandpass Filter


BPF-BV435+

50Ω

420 to 450 MHz

KEY FEATURES

- Low Insertion Loss, 1.7 dB Typ.
- High Rejection, 60 dB Typ.
- Wide Stopband Rejection, Up to 4 GHz
- Miniature Shielded Package



Generic photo used for illustration purposes only


APPLICATIONS

- Amateur Radio
- Transmitter/Receivers
- Military and Federal Applications
- Industrial Applications

PRODUCT OVERVIEW

Mini-Circuits' Model-BPF-BV435+ is a Lumped LC filter that offer a good insertion loss and high rejection. This bandpass filter covers from 420 to 450 MHz. This filter has high Q capacitors and inductors to achieve a low insertion loss. It has repeatable performance across production lots.

FUNCTIONAL DIAGRAM

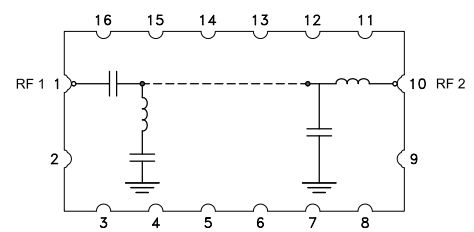

ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	—	435	—	MHz
	Insertion Loss	F1-F2	—	1.7	2.5	dB
	Return Loss	F1-F2	420 - 450	10	16	dB
Stopband, Lower	Rejection	DC-F3	DC - 100	30	37	dB
		F3-F4	100 - 390	20	26	dB
Stopband, Upper	Rejection	F5-F6	490 - 1000	20	28	dB
		F6-F7	1000 - 2000	45	60	dB
		F7-F8	2000 - 4000	30	40	dB

1. Tested in Evaluation Board P/N TB-BPF-BV435+.

2. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁵	1 W at +25°C

4. Permanent damage may occur if any of these limits are exceeded.





5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +85°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

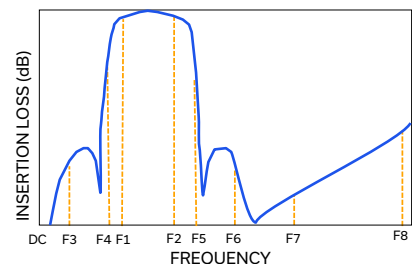



TYPICAL PERFORMANCE GRAPHS

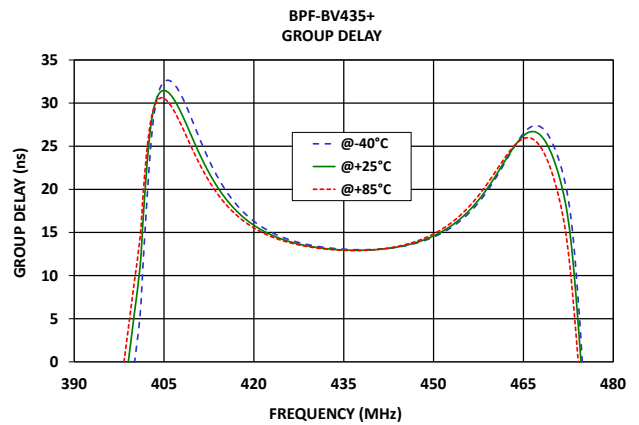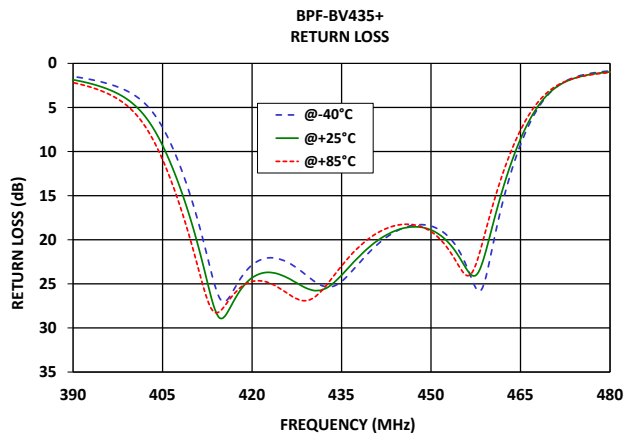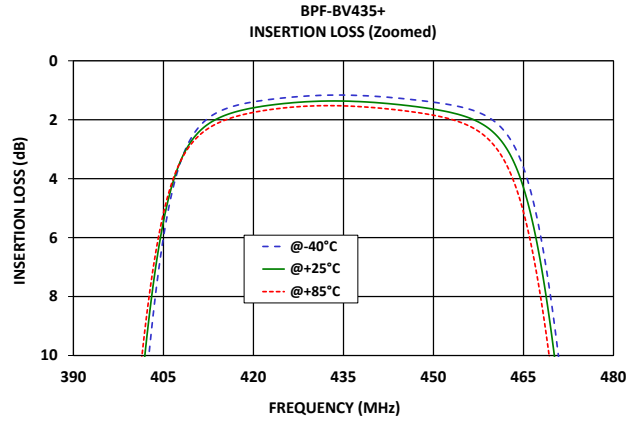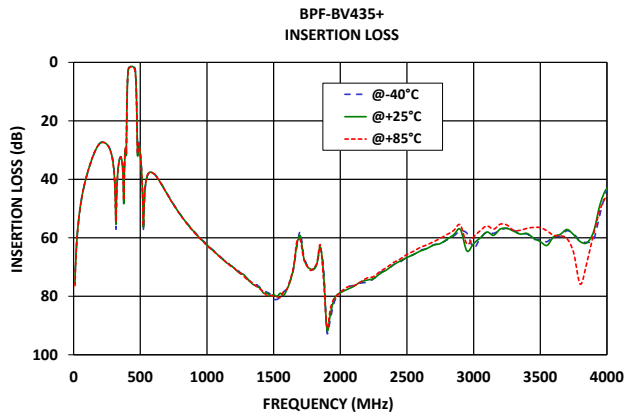



FUNCTIONAL DIAGRAM

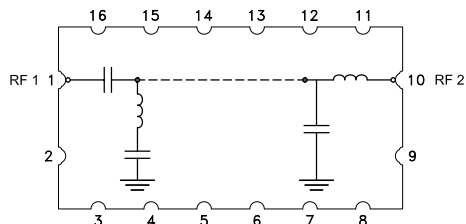



Figure 1. BPF-BV435+ Functional Diagram

PAD DESCRIPTION

Function	Pad Number	Description
RF1	1	Connects to RF Input Port
RF2	10	Connects to RF Output Port
GROUND	2-9,11-16	Connects to Ground on PCB, (See drawing PL-507)
NC	—	No connection, not used internally. See drawing PL-507 for connection to PCB

SUGGESTED PCB LAYOUT (PL-507)

SUGGESTED MOUNTING CONFIGURATION FOR KV1974 CASE STYLE, "16FL02" PIN CODE

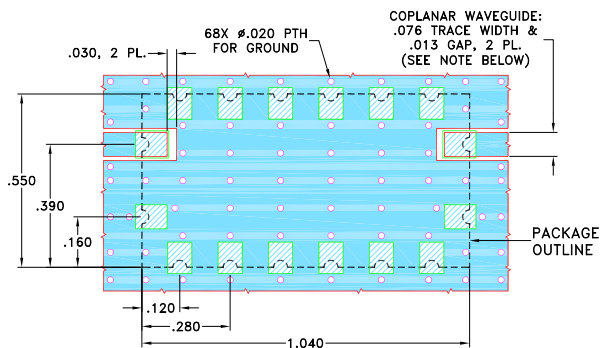


NOTE:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .060" ± .004"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout PL-507

CASE STYLE DRAWING

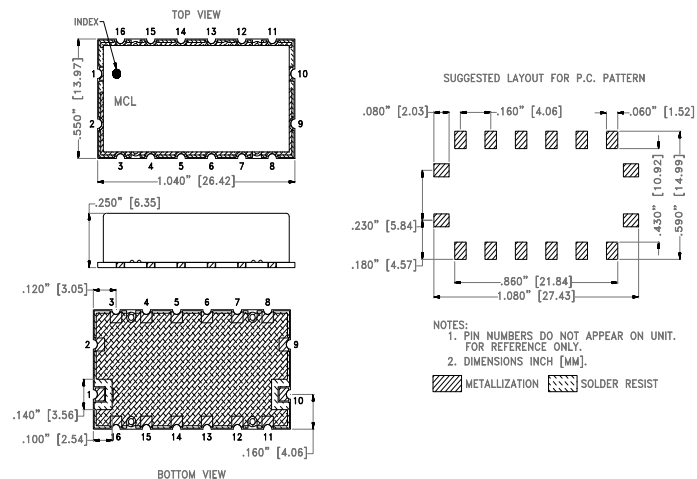

Unit Weight: 2.5gram
Dimensions are in inches [mm]. Tolerances: 2Pl. ± .03; 3Pl. ± .015

PRODUCT MARKING*: BPF-BV435

*Marking may contain other features or characters for internal lot control.



LUMPED LC SURFACE MOUNT

Bandpass Filter

BPF-BV435+

Mini-Circuits

50Ω

420 to 450 MHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data and Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	KV1974-1 Lead Finish: Gold over Nickel Plate
RoHS Status	Compliant
Tape and Reel	TR-F106
Suggested Layout for PCB Design	PL-507
Evaluation Board	TB-BPF-BV435+
	Gerber File
Environmental Rating	ENV02T1

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

