



Mini-Circuits

CERAMIC

High Pass Filter

HFCN-2000AT+


50Ω 2260 to 6250 MHz

THE BIG DEAL

- Low cost
- Small size
- 7 sections
- Temperature stable
- LTCC construction
- Excellent power handling, 7 W
- Hermetically sealed
- AEC-Q200 qualified component family

APPLICATIONS

- Automotive



Generic photo used for illustration purposes only

CASE STYLE: FV1206

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Stop Band	Rejection Loss	1300	40	—	dB
		1530	20	—	
	Freq. Cut-Off	2000	—	3.0	dB
	VSWR	1300-1530	—	20	
Pass Band	Insertion Loss	2260-6250	—	2.0	dB
		2410-5550	—	1.3	
	VSWR	2400-5600	—	1.5	:1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Electrical performance measured on TB-270 using HFCN-2000+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +105°C
RF Power Input ³	7 W max.at +25°C

3. Passband rating, derate linearly to 3 W at +105°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE



FUNCTIONAL SCHEMATIC

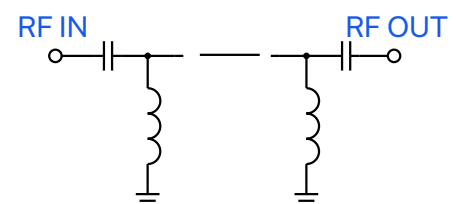

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
NPO-005308
HFCN-2000AT+
MCL NY
250606

PAGE 1 OF 3



Mini-Circuits®

CERAMIC

High Pass Filter

HFCN-2000AT+


50Ω 2260 to 6250 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4

PRODUCT MARKING: G1

DEMO BOARD MCL P/N: TB-270
SUGGESTED PCB LAYOUT (PL-137)

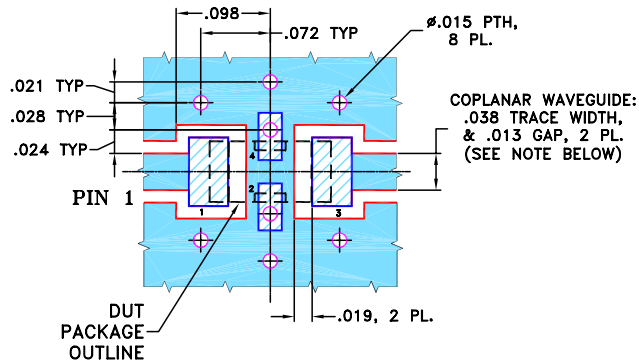


NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

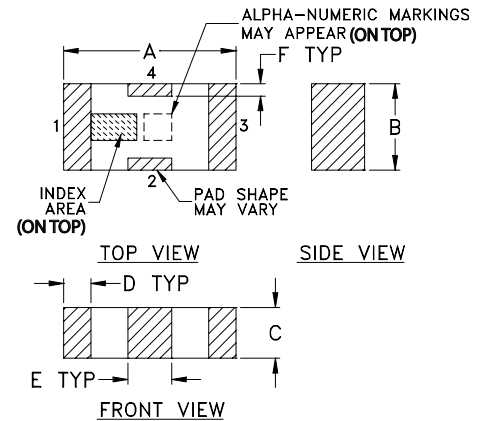

PCB Land Pattern

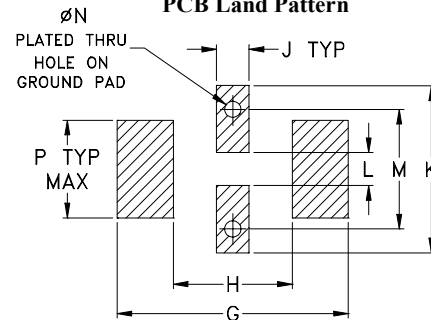

Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F	G	
.126	.063	.037	.020	.032	.009	.169	
3.20	1.60	0.94	0.51	0.81	0.23	4.29	
H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

TAPE & REEL INFORMATION: F71



Mini-Circuits

CERAMIC


High Pass Filter

HFCN-2000AT+

50Ω 2260 to 6250 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR :1
1.00	99.34	434.30
100.00	74.05	144.77
1300.00	43.12	34.07
1530.00	23.93	24.48
1700.00	12.72	12.61
1800.00	7.49	6.78
2000.00	2.31	2.31
2260.00	1.12	1.61
2400.00	0.95	1.55
2410.00	0.95	1.54
5550.00	0.84	1.47
5600.00	0.86	1.52
6250.00	1.65	2.29
7000.00	2.96	3.73
9000.00	6.69	8.12

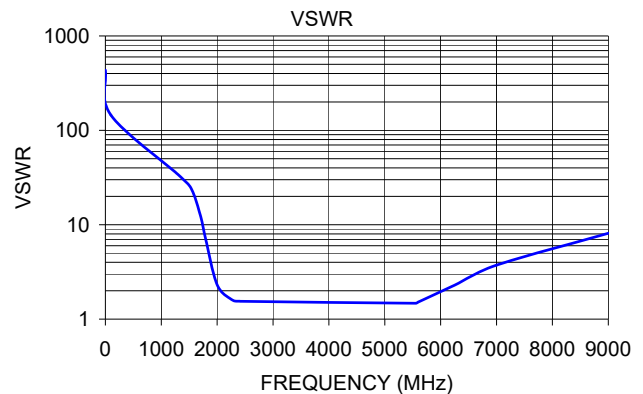

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

