



Mini-Circuits®

ULTRA-SMALL CERAMIC


## Power Splitter/Combiner

QCN-34AT+

2 Way-90° 50Ω 2500 to 3400 MHz

## FEATURES

- Low insertion loss, 0.4 dB typ.
- High isolation, 30 dB typ.
- Wrap-around terminal for excellent solderability
- Ultra small, 0.12"X0.06"X0.035"
- Patent pending
- AEC-Q200 qualified component family



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

**+RoHS Compliant**The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Automotive

ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C

| Parameter                    | Frequency (MHz) | Min. | Typ. | Max. | Unit   |
|------------------------------|-----------------|------|------|------|--------|
| Frequency Range              |                 | 2500 |      | 3400 | MHz    |
| Insertion Loss, above 3.0 dB | 2500-2800       |      | 0.4  | 0.6  | dB     |
|                              | 2800-3400       |      | 0.5  | 0.7  |        |
| Isolation                    | 2500-2800       | 23   | 32   |      | dB     |
|                              | 2800-3400       | 20   | 26   |      |        |
| Phase Unbalance              | 2500-2800       |      | 1    | 3    | Degree |
|                              | 2800-3400       |      | 1    | 4    |        |
| Amplitude Unbalance          | 2500-2800       |      | 0.4  | 0.9  | dB     |
|                              | 2800-3400       |      | 0.5  | 1.2  |        |
| VSWR                         | 2500-2800       |      | 1.15 |      | (:1)   |
|                              | 2800-3400       |      | 1.15 |      |        |

1. Tested on TB-255+ using QCN-34+ with evaluation board losses de-embedded.

2. For applications requiring DC voltage to be applied to the RF ports, add suffix letter "D" to part no. DC resistance to ground is 100 Mohms min.


## ABSOLUTE MAXIMUM RATINGS

| Parameter                    | Ratings            |
|------------------------------|--------------------|
| Operating Temperature        | -40°C to +105°C    |
| Storage Temperature          | -40°C to +105°C    |
| Power Input (as a splitter)* | 15 W max. at +25°C |

\* Derate linearly to 7 W at +105°C ambient.

Permanent damage may occur if any of these limits are exceeded.

## ELECTRICAL SCHEMATIC (NOTE 1)



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR  
NPO-005333  
QCN-34AT+  
ED-10885  
MCL NY  
250611

PAGE 1 OF 3



Mini-Circuits

ULTRA-SMALL CERAMIC

## Power Splitter/Combiner


QCN-34AT+

2 Way-90° 50Ω 2500 to 3400 MHz

## PIN CONNECTIONS

|                      |     |
|----------------------|-----|
| SUM PORT             | 1   |
| PORT 1 (0°)          | 4   |
| PORT 2 (+90°)        | 6   |
| GROUND               | 2,5 |
| 50 OHM TERM EXTERNAL | 3   |

## PRODUCT MARKING: P5

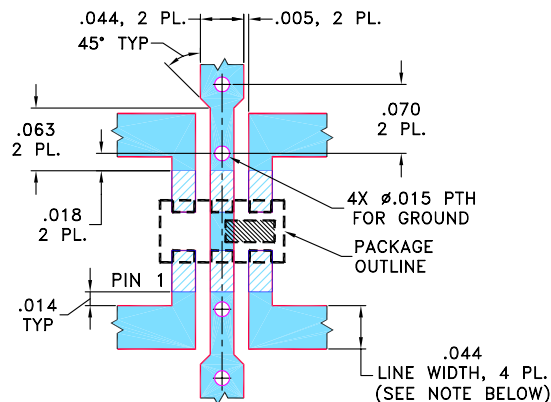
DEMO BOARD MCL P/N: TB-255  
SUGGESTED PCB LAYOUT (PL-131)

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS  $0.020" \pm 0.0015"$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## OUTLINE DRAWING

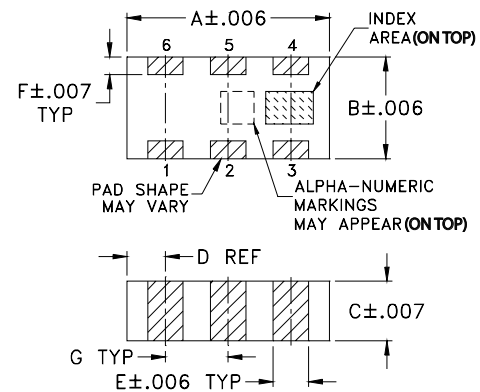

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm .002$

OUTLINE DIMENSIONS (Inches)  
mm

| A    | B    | C    | D    | E    | F     |
|------|------|------|------|------|-------|
| .126 | .063 | .035 | .024 | .022 | .011  |
| 3.20 | 1.60 | 0.89 | 0.61 | 0.56 | 0.28  |
| G    | H    | J    | K    |      | wt    |
| .039 | .024 | .042 | .123 |      | grams |
| 0.99 | 0.61 | 1.07 | 3.12 |      | .020  |

## TAPE &amp; REEL INFORMATION: F75





Mini-Circuits

ULTRA-SMALL CERAMIC

## Power Splitter/Combiner




QCN-34AT+

2 Way-90° 50Ω 2500 to 3400 MHz

## TYPICAL PERFORMANCE DATA AND GRAPHS

| Frequency<br>(MHz) | Total Loss <sup>2</sup><br>(dB) |      | Amplitude<br>Unbalance<br>(dB) | Isolation<br>(dB) | Phase<br>Unbalance<br>(deg.) | VSWR<br>(:1) |      |      |
|--------------------|---------------------------------|------|--------------------------------|-------------------|------------------------------|--------------|------|------|
|                    | S-1                             | S-2  |                                |                   |                              | S            | 1    | 2    |
| 2500               | 2.98                            | 3.74 | 0.76                           | 28.30             | 89.55                        | 1.07         | 1.08 | 1.07 |
| 2525               | 2.99                            | 3.72 | 0.73                           | 28.62             | 89.57                        | 1.07         | 1.08 | 1.07 |
| 2600               | 3.03                            | 3.68 | 0.65                           | 29.72             | 89.61                        | 1.06         | 1.07 | 1.05 |
| 2650               | 3.05                            | 3.67 | 0.61                           | 30.42             | 89.64                        | 1.05         | 1.06 | 1.04 |
| 2700               | 3.07                            | 3.65 | 0.58                           | 31.14             | 89.66                        | 1.04         | 1.06 | 1.03 |
| 2825               | 3.11                            | 3.63 | 0.52                           | 32.59             | 89.71                        | 1.03         | 1.05 | 1.02 |
| 2850               | 3.11                            | 3.63 | 0.52                           | 32.87             | 89.72                        | 1.03         | 1.05 | 1.02 |
| 2950               | 3.12                            | 3.64 | 0.52                           | 33.11             | 89.72                        | 1.02         | 1.04 | 1.03 |
| 3000               | 3.12                            | 3.65 | 0.53                           | 33.20             | 89.76                        | 1.02         | 1.04 | 1.03 |
| 3075               | 3.12                            | 3.68 | 0.56                           | 32.83             | 89.78                        | 1.02         | 1.03 | 1.04 |
| 3100               | 3.11                            | 3.68 | 0.57                           | 32.62             | 89.78                        | 1.02         | 1.03 | 1.05 |
| 3175               | 3.10                            | 3.72 | 0.62                           | 32.01             | 89.80                        | 1.03         | 1.02 | 1.05 |
| 3275               | 3.07                            | 3.79 | 0.72                           | 31.16             | 89.82                        | 1.04         | 1.02 | 1.06 |
| 3375               | 3.03                            | 3.87 | 0.84                           | 30.26             | 89.87                        | 1.05         | 1.01 | 1.07 |
| 3400               | 3.02                            | 3.90 | 0.88                           | 29.99             | 89.87                        | 1.05         | 1.01 | 1.08 |

2. Total Loss = Insertion Loss + 3 dB splitter loss.

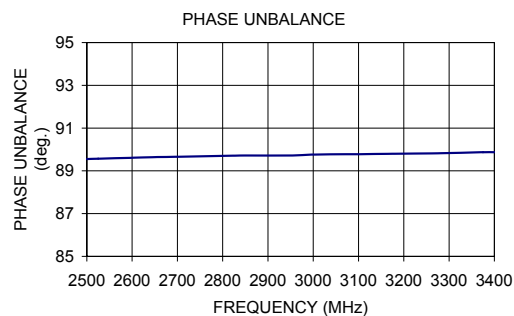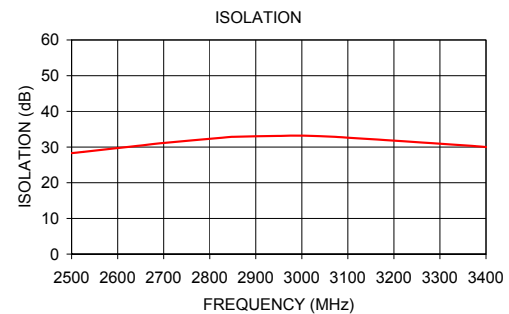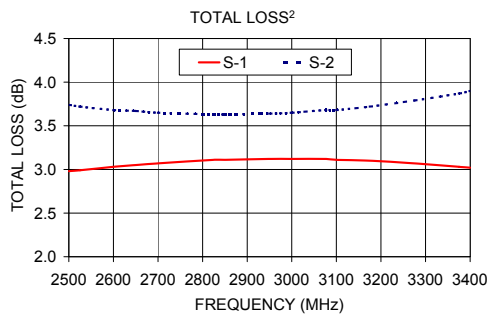

- NOTES**
- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

