



THIN FILM COAXIAL

Bandpass Filter

ZABF-9R3G-S+

50Ω 9.2 to 9.4 GHz SMA Male/Female

KEY FEATURES

- Low Passband Insertion Loss, 2.4 dB Typ.
- High Rejection, 53 dB Typ.
- Small Size

APPLICATIONS

- Satcom
- Ground Antenna for weather satellites
- Test and Measurement



Generic photo used for illustration purposes only

PRODUCT OVERVIEW


Mini-Circuits' Connectorized Thin-Film filters offer low insertion loss and high rejection realized via Thin-Film on Alumina substrate, using a sputtering process that can guarantee an enhanced Q and repeatable performance. Low pass, high pass, and bandpass connectorized thin-film designs can be realized with this technology up to 40 GHz in a small form factor helping customers achieve their SWaP objectives. Using our high quality thin-film manufacturing process we can guarantee repeatability on large batches of filters.

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency ²	—	—	—	9.3	—	GHz
	Insertion Loss	F1-F2	9.2 - 9.4	—	2.4	3.0	dB
	Return Loss	F1-F2	9.2 - 9.4	—	12	—	dB
Stopband, Lower	Rejection	DC-F3	DC - 6.5	43	53	—	dB
		F3-F4	6.5 - 7.8	20	35	—	dB
Stopband, Upper	Rejection	F5-F6	10.7 - 12	20	32	—	dB
		F6-F7	12 - 13	33	42	—	dB
		F7-F8	13 - 17	—	45	—	dB
		F8-F9	17-19	—	40	—	dB

1. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.


2. Typical variation ± 3%

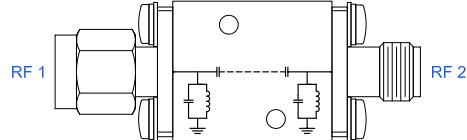FUNCTIONAL DIAGRAM**ABSOLUTE MAXIMUM RATINGS³**

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁴	1W at 25°C

3. Permanent damage may occur if any of these limits are exceeded.

4. Power rating applies only to signals within the passband.

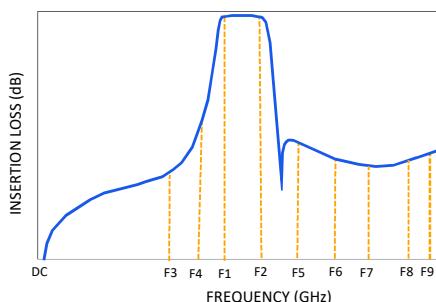TYPICAL FREQUENCY RESPONSE

REV. OR
ECO-027956
EDU5083
ZABF-9R3G-S+
URJ
251208

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 1 OF 4






THIN FILM COAXIAL

Bandpass Filter

ZABF-9R3G-S+

50Ω 9.2 to 9.4 GHz SMA Male/Female

TYPICAL PERFORMANCE GRAPHS AT +25°C

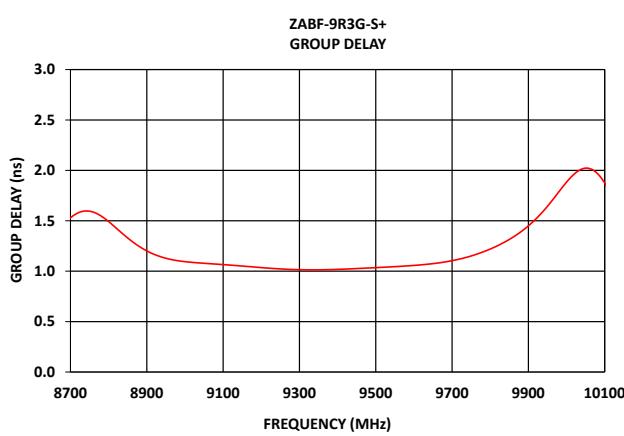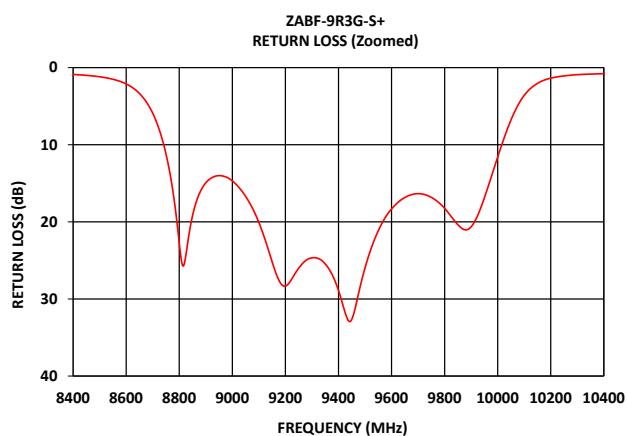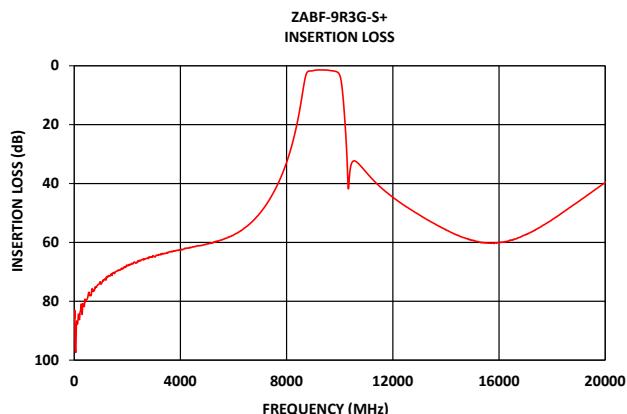



THIN FILM COAXIAL

Bandpass Filter

ZABF-9R3G-S+


Mini-Circuits

50Ω 9.2 to 9.4 GHz SMA Male/Female

CONNECTOR DESCRIPTION

Function	Connector
RF1 ⁵	SMA Male
RF2 ⁵	SMA Female

5. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

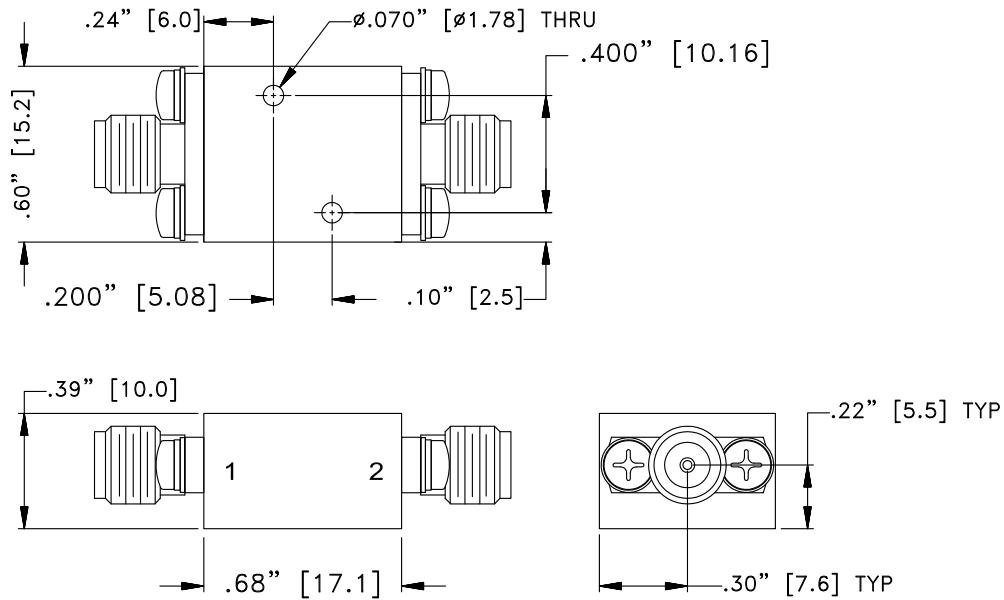CASE STYLE DRAWING

Unit weight: 24grams

Dimensions are in inches (mm). Tolerances: 2 PI.±.050"; 3 PI.±.015"

PRODUCT MARKING*: ZABF-9R3G-S+

*Marking may contain other features or characters for internal lot control.

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 3 OF 4



THIN FILM COAXIAL

Bandpass Filter

ZABF-9R3G-S+

Mini-Circuits

50Ω 9.2 to 9.4 GHz SMA Male/Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	UK3042
RoHS Status	Compliant
Environmental Ratings	ENV144

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html