



(LTCC) COAXIAL

Low Pass Filter

ZLFV-K1752+

50Ω DC to 17.5 GHz 2.92mm Female

KEY FEATURES

- Low Insertion Loss, 1.9 dB Typ.
- Return Loss, 13 dB Typ.
- Stopband Rejection, 40 dB Typ.
- Broadband Connectorized Package
- Power Handling: 4.5 Watts

APPLICATIONS

- Ka Satcom
- Cellular Backhaul


PRODUCT OVERVIEW

ZLFV-K1752+ is a 50Ω low pass filter built in broadband connectorized package. Covering DC-17.5 GHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZLFV-K1752+ offer low insertion loss, and good power handling capability. It handles up to 4.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

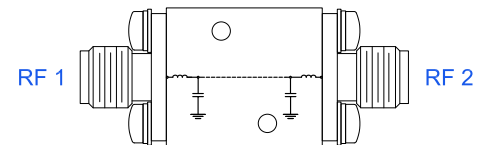

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	DC-F1	DC - 16.5	—	1.9	2.6	dB
	F1-F2	16.5 - 17.5	—	2.0	—	
	Freq. Cut-Off ²	Fc	—	3	—	dB
	Return Loss	DC- 17.5	—	13	—	dB
Stopband	F3-F4	22.8 - 25	20	39	—	dB
	F4-F5	25 - 30	30	36	—	
	F5-F6	30 - 40	—	40	—	

1. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

2. Typical variation ± 5%


ABSOLUTE MAXIMUM RATINGS³

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power ⁴	4.5 W @25°C

3. Permanent damage may occur if any of these limits are exceeded.

4. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 1.6 W at +125°C.

TYPICAL FREQUENCY RESPONSE

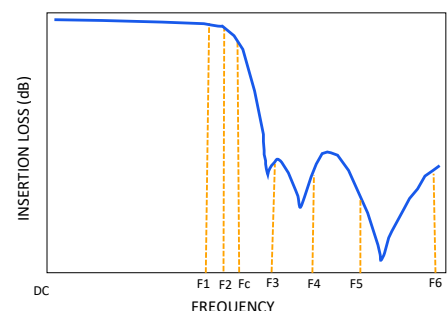



(LTCC) COAXIAL






Low Pass Filter

ZLFV-K1752+

Mini-Circuits

50Ω DC to 17.5 GHz 2.92mm Female

TYPICAL PERFORMANCE GRAPHS

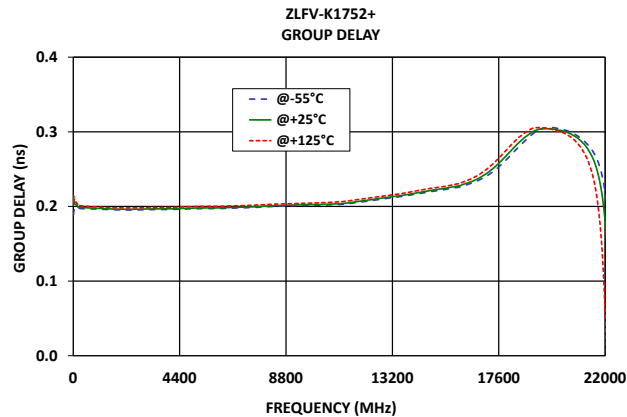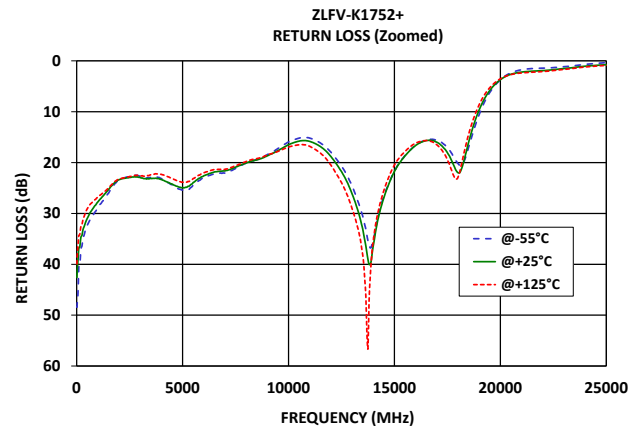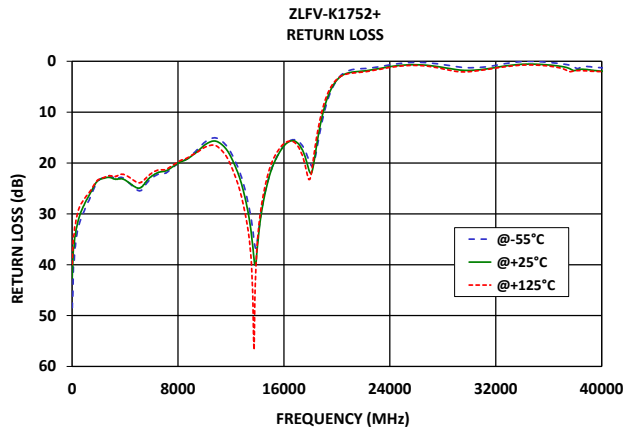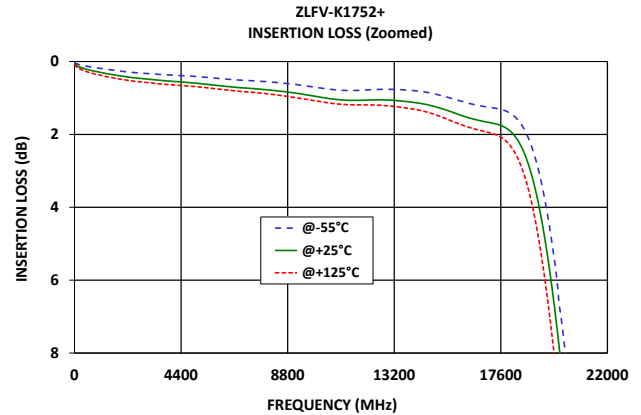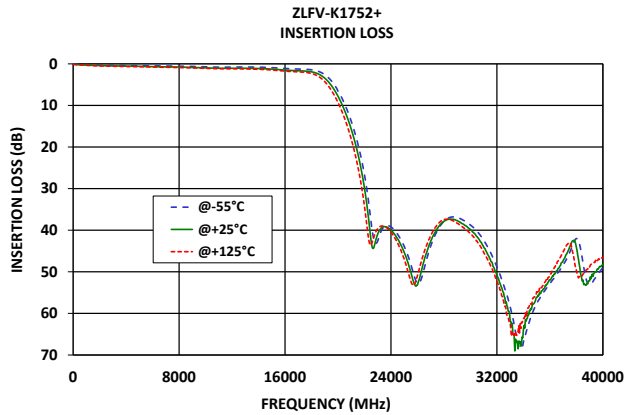



(LTCC) COAXIAL

Low Pass Filter


ZLFV-K1752+

50Ω DC to 17.5 GHz 2.92mm Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1	1	2.92mm Female
RF2	2	2.92mm Female

CASE STYLE DRAWING

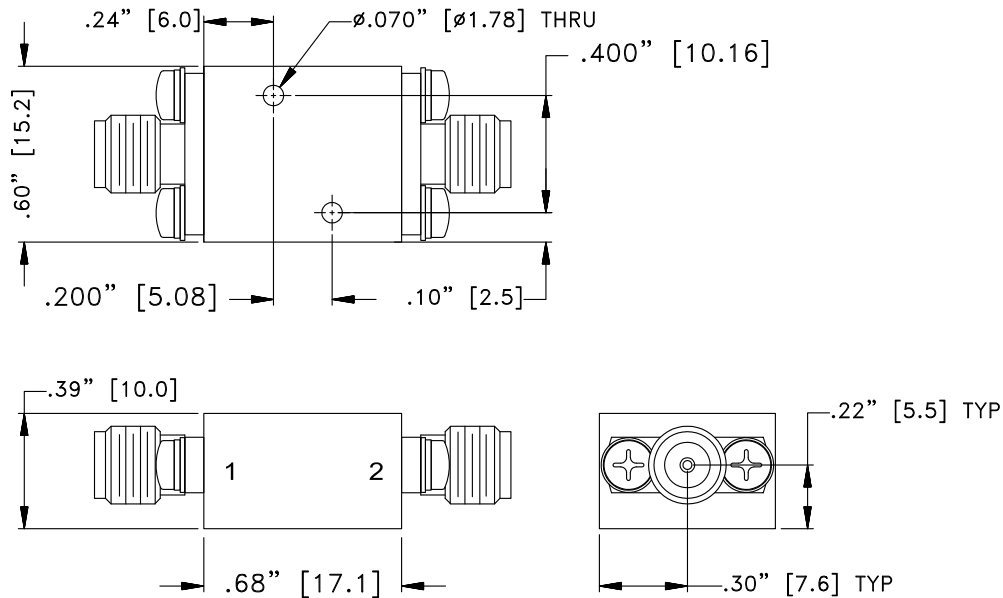

Unit weight: 24grams

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .050"$; 3 Pl. $\pm .015"$

PRODUCT MARKING*: ZLFV-K1752+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

(LTCC) COAXIAL

Low Pass Filter

ZLFB-K1752+

50Ω DC to 17.5 GHz 2.92mm Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	UK3042
RoHS Status	Compliant
Environmental Ratings	ENV124

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

