

Coaxial

Power Splitter/Combiner

ZSC-4-2+

4 Way-0° 50Ω 0.002 to 20 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.250W max.

At low range frequency band (f_L to $10 f_L$), linearly derate maximum input power by 13 dB.
Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

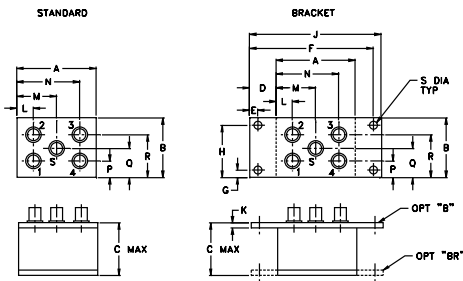

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
2.25	1.38	1.24	.50	.150	3.100	.138	1.238	3.25
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45	82.55
K	L	M	N	P	Q	R	S	wt
.10	.48	1.13	1.78	.36	.69	1.01	.150	grams
2.54	12.19	28.70	45.21	9.14	17.53	25.65	3.81	92.0

Features

- high isolation, 33 dB typ.
- rugged shielded case

Applications

- HF
- amateur radio



Generic photo used for illustration purposes only

CASE STYLE: N27
Connectors Model
BNC ZSC-4-2+
BRACKET(OPTION "B")
BRACKET(OPTION "BR")

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 6.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.002-20	30	20	33	25	33	25	0.45	0.75	0.3	0.5	0.7	1.0	4	6	8	0.15	0.20	0.25

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
0.002	6.44	6.44	6.45	6.45	0.02	27.93	24.11	28.25	0.19	1.56	1.95	1.95	1.95	1.95
0.005	6.27	6.26	6.27	6.28	0.02	29.59	30.37	30.18	0.20	1.35	1.38	1.38	1.38	1.38
0.010	6.23	6.23	6.23	6.23	0.00	29.99	35.42	30.62	0.07	1.31	1.22	1.22	1.22	1.22
0.020	6.22	6.22	6.22	6.22	0.00	30.05	39.79	30.68	0.04	1.29	1.15	1.15	1.16	1.16
0.142	6.22	6.22	6.22	6.22	0.00	29.99	43.85	30.60	0.01	1.29	1.13	1.13	1.13	1.13
0.510	6.22	6.22	6.23	6.23	0.00	30.03	44.02	30.63	0.01	1.29	1.13	1.13	1.13	1.13
1.000	6.23	6.23	6.23	6.23	0.00	30.08	43.85	30.70	0.01	1.29	1.13	1.13	1.13	1.13
2.000	6.25	6.25	6.25	6.25	0.00	30.28	43.48	30.89	0.05	1.30	1.13	1.13	1.13	1.13
5.000	6.31	6.32	6.32	6.32	0.01	30.97	41.40	31.57	0.10	1.31	1.12	1.12	1.12	1.12
7.000	6.35	6.36	6.36	6.36	0.01	31.39	39.96	31.93	0.13	1.32	1.11	1.11	1.11	1.11
10.000	6.41	6.41	6.41	6.41	0.01	31.96	38.03	32.42	0.17	1.32	1.10	1.10	1.10	1.10
12.000	6.44	6.43	6.44	6.44	0.01	32.32	36.92	32.73	0.21	1.32	1.09	1.09	1.09	1.09
15.000	6.47	6.47	6.48	6.48	0.01	32.92	35.57	33.21	0.26	1.31	1.08	1.08	1.08	1.08
17.000	6.49	6.49	6.50	6.51	0.02	33.38	34.77	33.59	0.30	1.30	1.07	1.07	1.08	1.08
20.000	6.52	6.52	6.54	6.54	0.02	34.22	33.73	34.31	0.35	1.28	1.06	1.06	1.07	1.07

1. Total Loss = Insertion Loss + 6dB splitter loss.

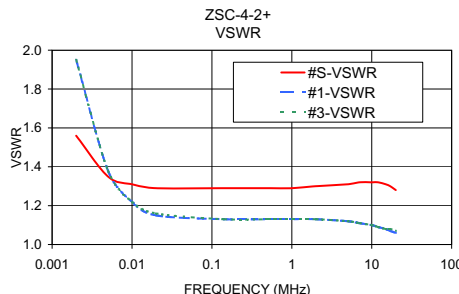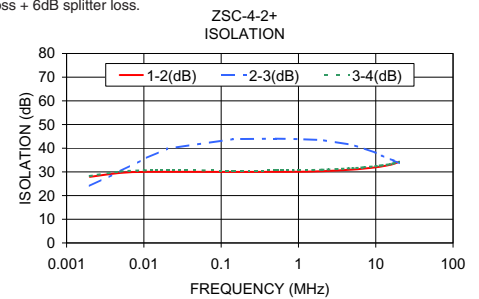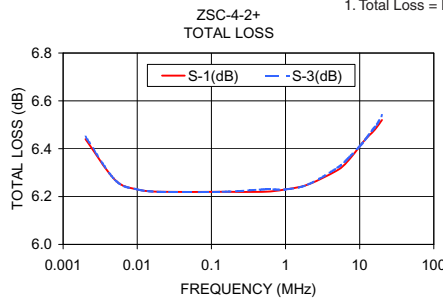

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp

