



Solid-State Switch

ZTS-2SP8T-852

50Ω 1 to 8500 MHz 2 x SP8T SMA Female

THE BIG DEAL

- 2 x solid-state SP8T absorptive switches
- Convenient rack-mountable chassis
- SSH secure Ethernet communication
- Daisy-chain control stacking of multiple switch racks




Generic photo used for illustration purposes only

APPLICATIONS

- RF test automation & signal routing
- 5G FR1, Bluetooth & WiFi signal distribution
- MIMO antenna testing
- C-band radar & satcom
- Switch matrices

FUNCTIONAL BLOCK DIAGRAM

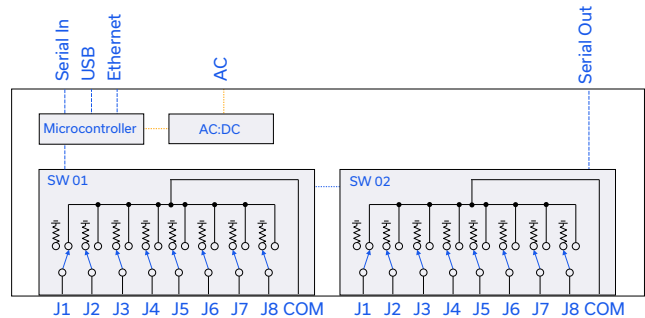

PRODUCT OVERVIEW

Mini-Circuits' ZTS series platform allows multiple solid-state switch types to be combined and integrated into a single rack-mount package with software control via USB and Ethernet. ZTS-2SP8T-852 integrates 2 solid-state SP8T switches into a chassis, operating from 10 MHz to 8.5 GHz with fast switching and high isolation.

The system is housed in a compact, 1U height, 19-inch rack chassis, with all RF connectors (SMA female) on the front panel and power and control connections out of the way on the rear panel.

The switch is controlled via USB or Ethernet (supporting SSH, HTTP & Telnet protocols). Full software support is provided, including our user-friendly GUI application for Windows, flexible API, and programming instructions for Windows and Linux environments.

The daisy-chain control interface further simplifies control integration by allowing multiple switch racks to be interconnected via their respective serial in and out connections. The complete set of daisy-chained switches can then be independently controlled through a single USB / Ethernet connection.

KEY FEATURES

Feature	Advantages
Solid-state switches	Fast switching and high isolation switch, well suited to automated test setups with large numbers of devices or channels under test
Wide bandwidth	Operation from 10 MHz to 8.5 GHz incorporates most of the key commercial wireless mesh network applications, including WiFi 6E, 5G FR1 and Zigbee.
Rack-mount chassis	Compact, 1U height 19" rack-chassis minimizes the rack space required in crowded production test environments.
Secure Ethernet communication	Support for SSH (Secure Shell protocol) provides a means for secure communication over Ethernet networks with strict security policies. HTTP & Telnet communication via Ethernet are also supported.



ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Conditions	Min.	Typ.	Max.	Units
Frequency Range	-	10		8500	MHz
Insertion Loss	10 – 700 MHz		3.2	4.5	dB
	700 – 2500 MHz		3.9	5.5	
	2500 – 5000 MHz		5.2	6.5	
	5000 – 6000 MHz		5.8	7.5	
	6000 – 7200 MHz		6.0	8.0	
	7200 – 8000 MHz		6.5	8.5	
	8000 – 8500 MHz		7.0	9.0	
Isolation (Between Outputs) ¹	10 – 700 MHz	80	100		dB
	700 – 5000 MHz	70	87		
	5000 – 6000 MHz	52	69		
	6000 – 7200 MHz	50	60		
	7200 – 8000 MHz	50	57		
	8000 – 8500 MHz	49	55		
Isolation (Inactive Paths) ²	10 – 700 MHz	78	100		dB
	700 – 5000 MHz	73	98		
	5000 – 6000 MHz	58	76		
	6000 – 7200 MHz	54	65		
	7200 – 8000 MHz	54	63		
	8000 – 8500 MHz	52	60		
Return Loss (COM Port) ³	10 – 700 MHz		15.5		dB
	700 – 5000 MHz		19.0		
	5000 – 6000 MHz		19.0		
	6000 – 7200 MHz		18.0		
	7200 – 8000 MHz		15.0		
	8000 – 8500 MHz		12.0		
Return Loss (Active Ports) ⁴	10 – 700 MHz		14.5		dB
	700 – 5000 MHz		19.0		
	5000 – 6000 MHz		19.0		
	6000 – 7200 MHz		16.0		
	7200 – 8500 MHz		13.0		
Return Loss (Terminated Ports) ⁵	10 – 700 MHz		23.0		dB
	700 – 5000 MHz		23.0		
	5000 – 8000 MHz		21.0		
	8000 – 8500 MHz		16.0		
Input Power	Hot switching			+24	dBm
	Into internal terminations			+24	
	Cold switching, 10-40 MHz			+25	
	Cold switching, 40-8500 MHz			+29	

1. Isolation measured between any pair of ports J1 to J8

2. Isolation measured between Com and any disconnected port. Example: Isolation for COM to J1 is the leakage measured at port J1 from a signal input at COM when the active switch path is set COM to J2.

3. Return loss into COM port in all states


4. Return loss into any of ports J1-J8 when connected to COM

5. Return loss into any of ports J1-J8 when internally terminated (disconnected from COM)




TYPICAL PERFORMANCE GRAPHS


Insertion Loss over Temperature (J1 Active)

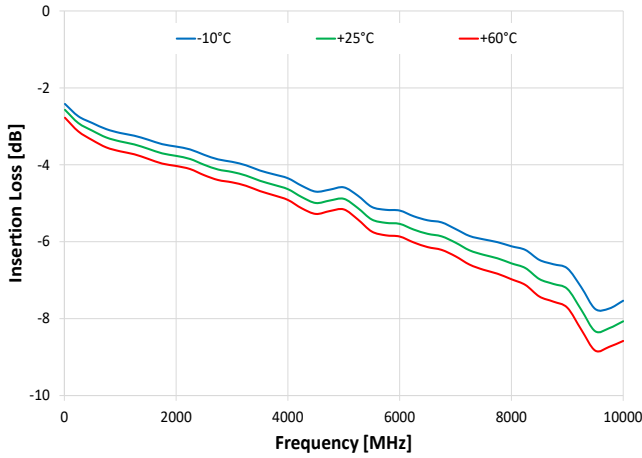


Insertion Loss J1 - J8 Active

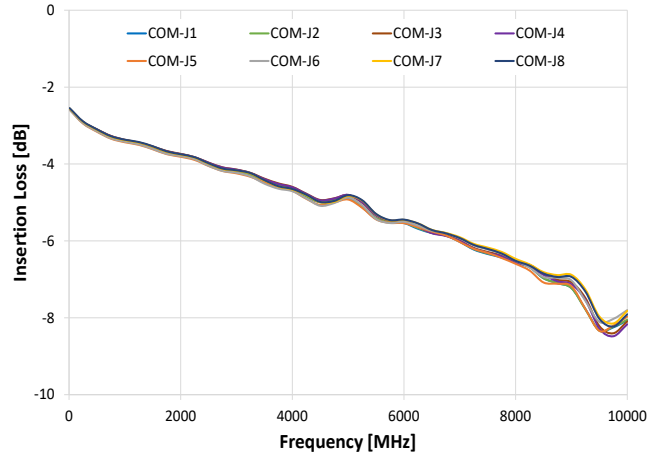


Isolation Com to J2 (J1 Active)

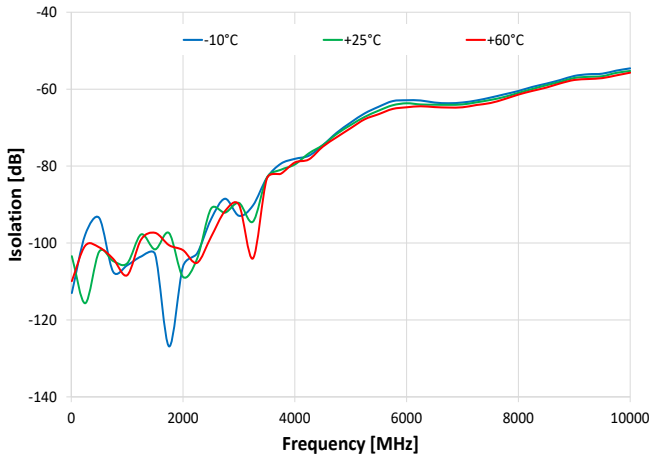


Isolation Com to J3 (J2 Active)

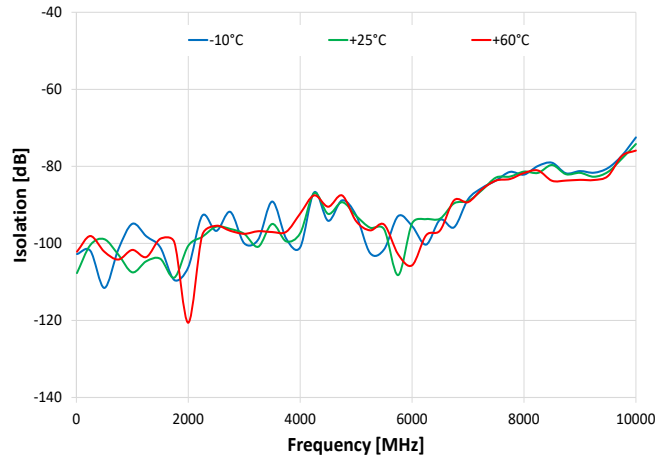

Isolation J1 to J2 (J1 Active)

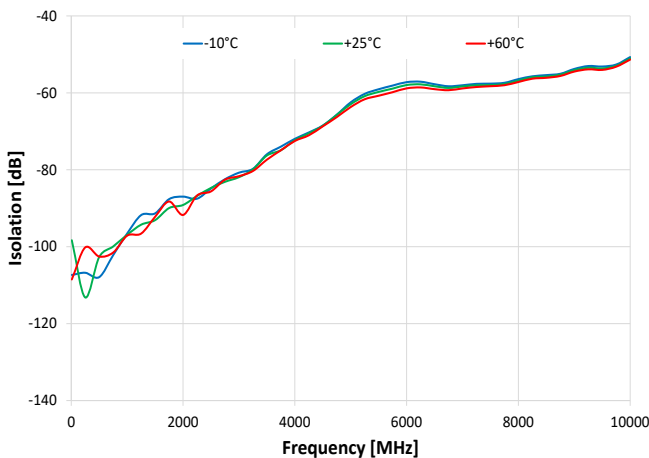


Isolation J7 to J8 (J7 Active)

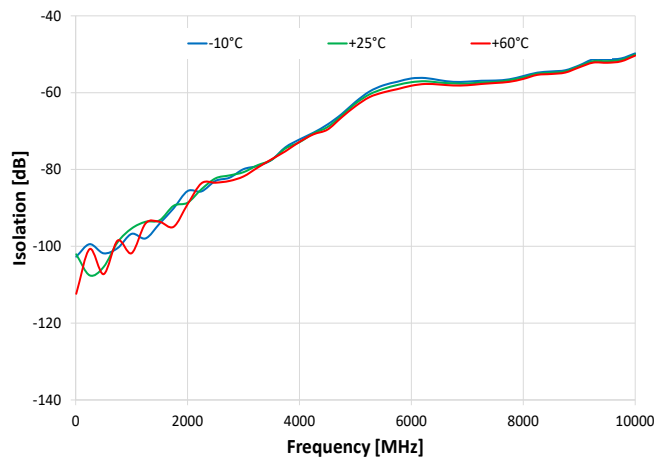




TYPICAL PERFORMANCE GRAPHS


Return Loss @ COM over Temperature (J1 Active)

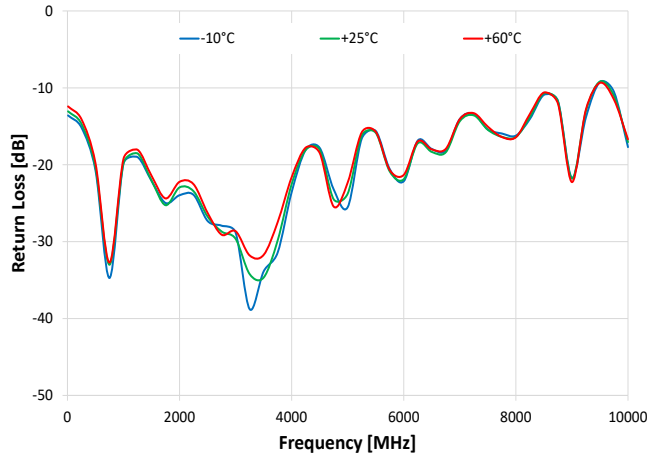


Return Loss @ J1 over Temperature (J1 Active)

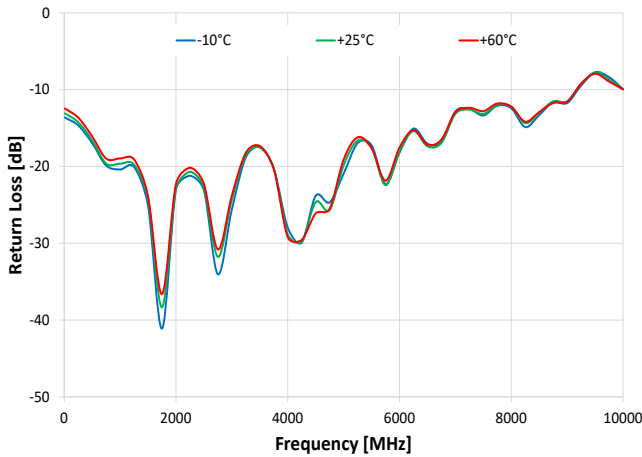


Return Loss @ J1 over Temperature (J1 Terminated)

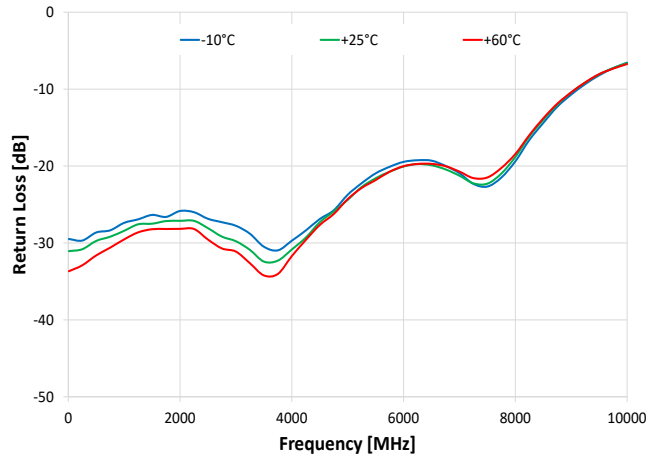

Return Loss @ Active ports (J1- J8 Active)

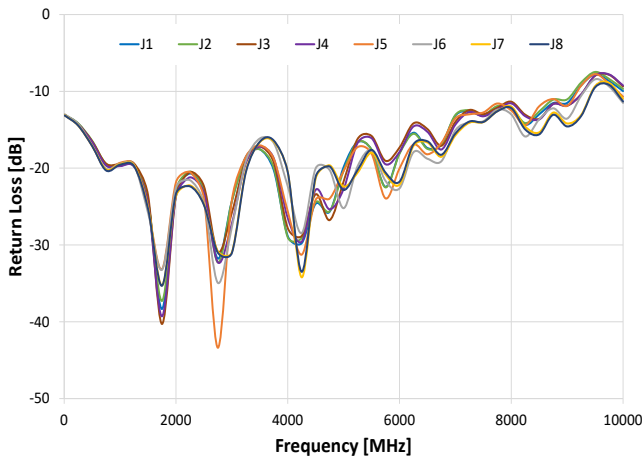

Return Loss @ Terminated ports (J1 - J8 Terminated)

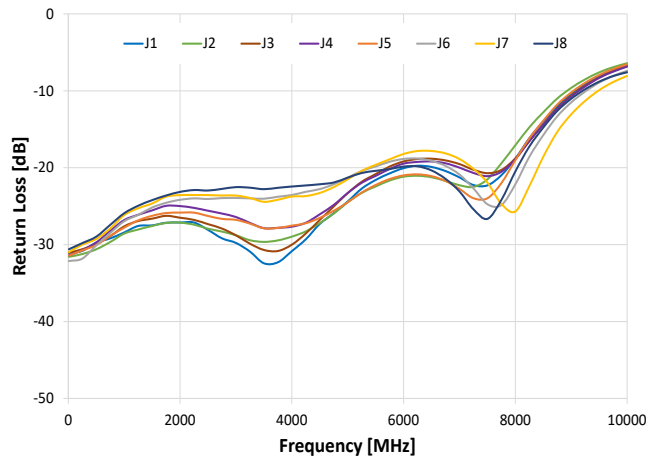

**CONTROL INTERFACES**

Ethernet Control	Supported Protocols	TCP / IP, SSH, HTTP, Telnet, DHCP, UDP (limited)
	Max Data Rate	100 Mbps (100 Base-T Full Duplex)
USB Control	Supported Protocols	HID – High Speed
	Min Communication Time	400 μs typ ¹

1. Based on the polling interval of the USB HID protocol (125 μs with 64 bytes per packet) and no other significant CPU or USB activity

SOFTWARE & DOCUMENTATION

Mini-Circuits' full software and support package including user guide, Windows GUI, API, programming manual and examples can be downloaded free of charge (refer to the last page for the download path).

A comprehensive set of software control options is provided:

- GUI for Windows – Simple software interface for control via Ethernet and USB
- Programming / automation via Ethernet
 - Complete set of control commands which can be sent via any supported protocol – simple to implement in the majority of modern programming environments
- Programming / automation via USB
 - DLL files provide a full API for Windows with a set of intuitive functions which can be implemented in any programming environment supporting .Net Framework or ActiveX
 - Direct USB programming is possible in any other environment (not supporting .Net or ActiveX)

Please contact testsolutions@minicircuits.com for support

MINIMUM SYSTEM REQUIREMENTS

Hardware	Intel i3 (or equivalent) or later
GUI (USB or Ethernet Control)	Windows 7 or later
USB API DLL	Windows 7 or later with support for Microsoft .Net Framework or ActiveX
USB Direct Programming	Windows 7 or later; Linux
Ethernet	Windows, Linux or macOS with Ethernet TCP / IP support

PROGRAMMING COMMANDS

The key ASCII / SCPI commands for control of the system for control via the Ethernet or USB API are summarized below (refer to the programming manual for full details):

Command / Query	Description
:MN?	Read model name
:SN?	Read serial number
:FIRMWARE?	Read firmware version
:address:SP8T:STATE:port	Set a switch state: <ul style="list-style-type: none"> • address = switch number (01 or 02) • port = the switch state to set Example: 01:SP8T:STATE:8 (set the switch to state 8)
:address:SP8T:STATE?	Get the state of all switches: <ul style="list-style-type: none"> • address = switch number (01 or 02) Example: 01:SP8T:STATE?



GRAPHICAL USER INTERFACE (GUI) FOR WINDOWS - KEY FEATURES

- Connect via USB or Ethernet
- Run GUI in demo mode to evaluate the software without a hardware connection
- View and set the switch state at the click of a button
- Configure automated switch sequences
- Update Ethernet settings and firmware

Mini-Circuits Multi Switch Controller (Ver. C3X6)

Main Control [Block Diagram] [Help]

User Profile: Admin

Model Name: **ZTS-1SP8T-852** Protocol: USB IP: [] Connection Options: [Change User Profile]

Serial Number: **02306060131** Connection Status: Connected Ethernet Config: [GUI Configuration]

Firmware Upgrade: [Switch Sequence]

#	Name	State
01	USB-1SP8T-852H	4

01: USB-1SP8T-852H	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch
No Switch	No Switch	No Switch	No Switch	No Switch	No Switch

Switch Commands: .01:SP8T-STATE:3 [] [] [] [] []

Switch State Queries: .01:SP8T-STATE? [] [] [] [] []

System Queries: .NumberOfSlaves? [] [] [] [] []

Command [X] [] [SEND]

Command History [X]

```

[4/23/2024 11:25:25 AM] [Other Settings] SCPI: :SN? Result: 02306060131 Return: 1
[4/23/2024 11:25:32 AM] [Other Settings] SCPI: :FIRMWARE? Result: B1-D92 Return: 1
[4/23/2024 11:25:38 AM] [Other Settings] SCPI: :MN? Result: ZTS-1SP8T-852 Return: 1
[4/23/2024 11:25:43 AM] [Other Settings] SCPI: :NUMBEROFSLAVES? Result: 1 Return: 1
[4/23/2024 11:25:50 AM] [Other Settings] SCPI: :NUMBEROFSLAVES? Result: 1 Return: 1

```



Solid-State Switch

ZTS-2SP8T-852

50Ω 1 to 8500 MHz 2 x SP8T SMA Female

ABSOLUTE MAXIMUM RATINGS

Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	
Input Power (No Damage)	Hot Switching	+24	dBm
	Cold Switching 10-40 MHz	+25	
	Cold Switching 40 - 8500 MHz	+29	
	Into internal termination	+24	

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

POWER SUPPLY

Power Supply	AC mains input: 100-240 V, 50 / 60 Hz
Fuse	2A, 250V rating
Power Consumption	150W maximum

SWITCH STATE TABLE


Switch Command	Switch Path
:xx:SP8T:STATE:1	COM to port J1
:xx:SP8T:STATE:2	COM to port J2
:xx:SP8T:STATE:3	COM to port J3
:xx:SP8T:STATE:4	COM to port J4
:xx:SP8T:STATE:5	COM to port J5
:xx:SP8T:STATE:6	COM to port J6
:xx:SP8T:STATE:7	COM to port J7
:xx:SP8T:STATE:8	COM to port J8

xx = Switch number (01 or 02)
COM = Common port
J1-J8 = Input / output port

CONNECTIONS

Port	Connector
SW1 & SW2, COM & J1-J8	SMA female
USB	USB type B
Ethernet / LAN	RJ45
Serial In & Out	D-Sub 9-pin
AC Input	IEC C14 inlet

FUNCTIONAL BLOCK DIAGRAM

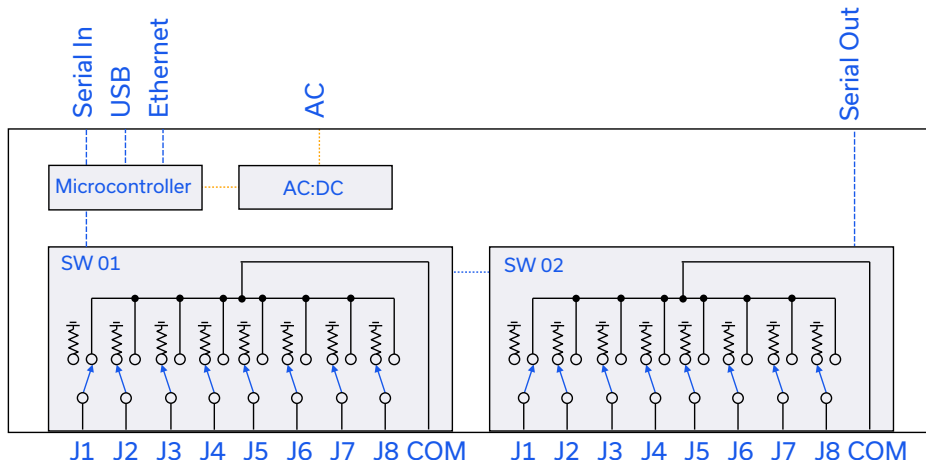




Solid-State Switch

ZTS-2SP8T-852

50Ω 1 to 8500 MHz 2 x SP8T SMA Female

CASE STYLE DRAWING

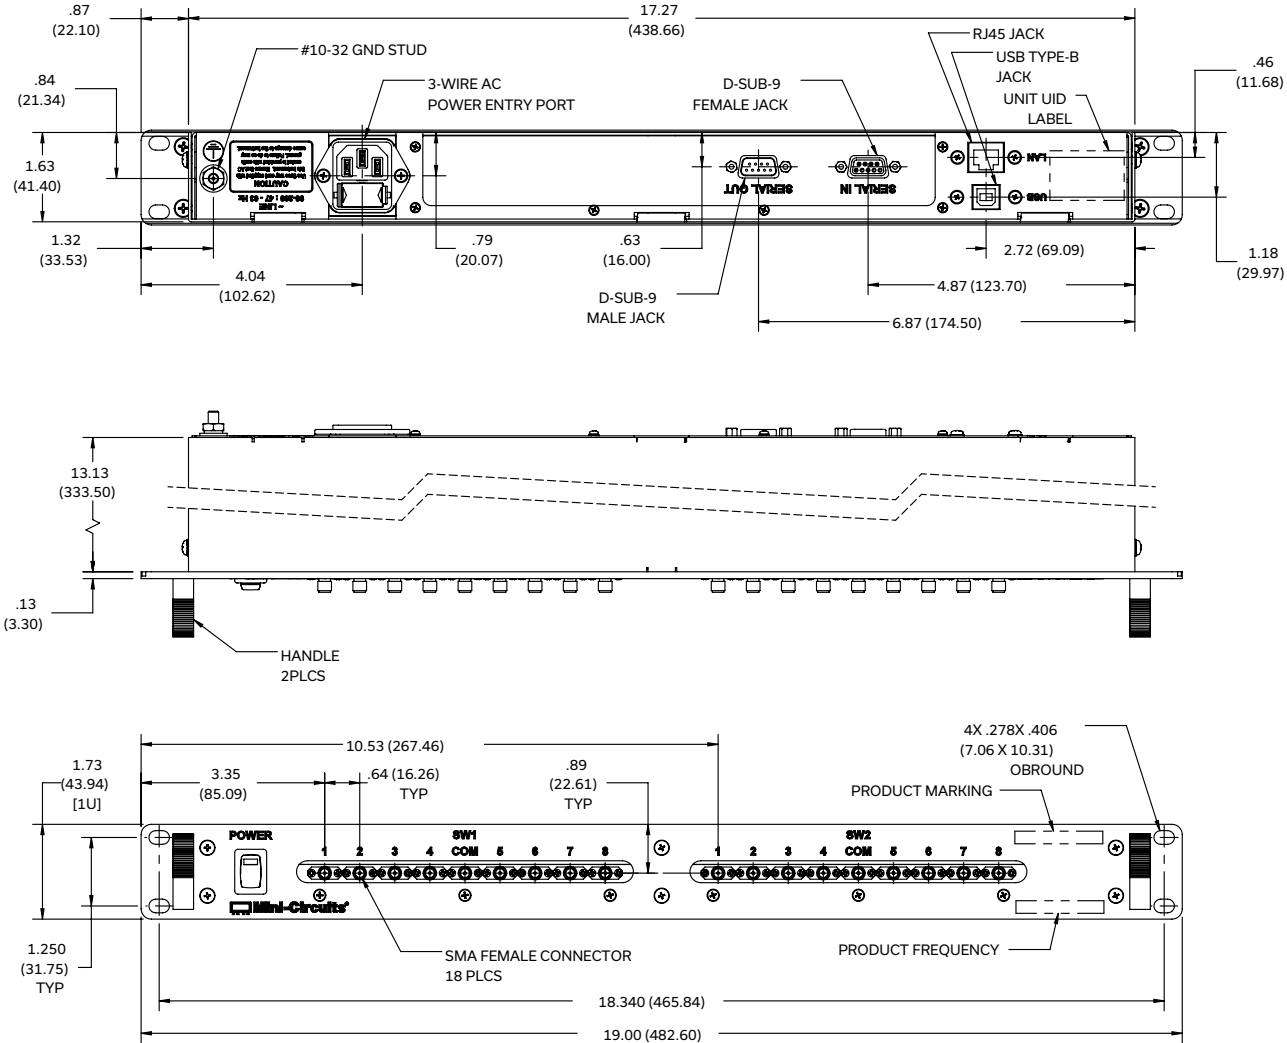

1. Case material: Aluminum (with protective coating to prevent corrosion).
2. Dimensions are in inches (mm). Tolerances: 2 Pl.±.03 inch; 3 Pl.±.015 inch.
3. Weight: 3410 grams.
4. Marking may contain features or characters for internal lot control.

PRODUCT MARKING*

Product Marking: ZTS-2SP8T-852

Product Frequency: 10-8500 MHz

Unit ID Label: Serial number and other identification marks

*Marking may contain other features or characters for internal lot control



USB & ETHERNET & DAISY-CHAIN

Solid-State Switch

ZTS-2SP8T-852




Mini-Circuits






50Ω 1 to 8500 MHz 2 x SP8T SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	BAG3671
Software, User Guide & Programming Manual	www.minicircuits.com/softwaredownload/multissw.html
Environmental Rating	ENV55
Regulatory Compliance	<p>Refer to our website for compliance methodologies and qualifications</p>  <p>www.minicircuits.com/quality/environmental_introduction.html</p>

Contact Us: testsolutions@minicircuits.com

Included Accessories	Part Number	Description
	CBL-3W-xx	AC power cord (IEC C13 connector to local plug) Select one option from the list below. Please contact testsolutions@minicircuits.com if your region is not listed.
	USB-CBL-AB-7+	USB cable (6.8ft) type A to type B
	CBL-RJ45-MM-5+	Ethernet cable (5 ft)
	HT-4-SMA	SMA connector wrench (4" length)
	D-SUB9-MF-6+	D-Sub (9-pin) serial cable (6 ft)

AC Power Cord Options	Part Number	Description
	CBL-3W-US	USA NEMA 5-15 plug (type B) to IEC C13 connector
	CBL-3W-EU	Europe CEE 7/7 plug (type E/F) to IEC C13 connector
	CBL-3W-UK	UK BS-1363 plug (type G) to IEC C13 connector
	CBL-3W-AU	Australia & China AS/NZS 3112 plug (type I) to IEC C13 connector
	CBL-3W-IL	Israel SI-32 plug (type H) to IEC C13 connector

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

