



CAVITY COAXIAL

Bandpass Filter

ZVBP-15R4G-S+

Mini-Circuits


50Ω 13.05 to 17.75 GHz SMA Female

KEY FEATURES

- Low Insertion Loss, 1.0 dB Typ.
- Good Return Loss, 17 dB Typ.
- High Rejection, 90 dB Typ.
- Stopband up to 25 GHz
- Power Handling 15 Watts

APPLICATIONS

- Test and measurements




Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' ZVBP-15R4G-S+ is a coaxial cavity filter designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. Mini-Circuits' coaxial cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical.

FUNCTIONAL DIAGRAM



ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	—	15.4	—	GHz
	Insertion Loss	F1-F2	13.05 - 17.75	—	1.0	1.5	dB
	Return Loss	F1-F2	13.05 - 17.75	12	17	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 11.75	70	90	—	dB
		F3-F4	11.75 - 12.55	40	45	—	
Stop Band, Upper	Rejection	F5-F6	18.25 - 21	38	43	—	dB
		F6-F7	21 - 25	70	88	—	


1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

ABSOLUTE MAXIMUM RATINGS^{2,3}

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁴	15 W max. at +25°C

2. Permanent damage may occur if any of these limits are exceeded.
 3. Input and output ports are DC short to ground.
 4. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

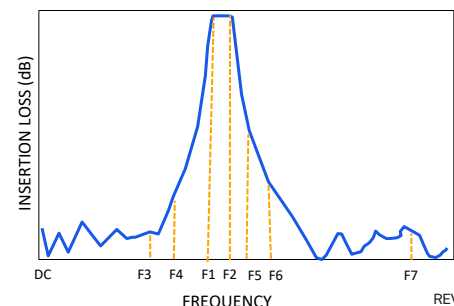

REV. OR
 ECO-023023
 ZVBP-15R4G-S+
 EDU4827
 URJ
 240913





CAVITY COAXIAL





Bandpass Filter

ZVBP-15R4G-S+

Mini-Circuits

50Ω 13.05 to 17.75 GHz SMA Female

TYPICAL PERFORMANCE GRAPHS

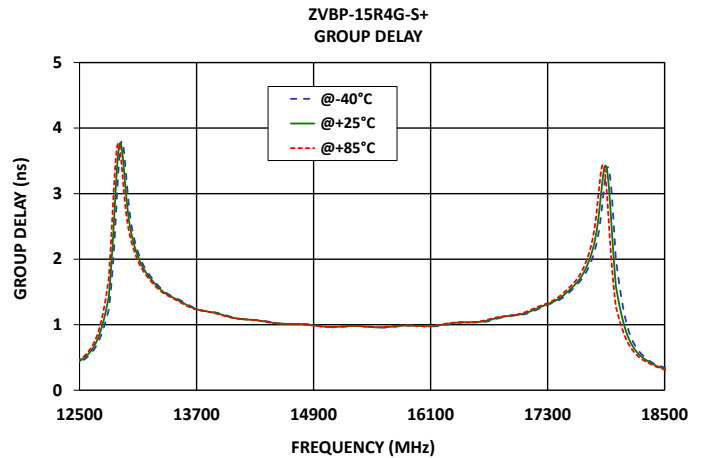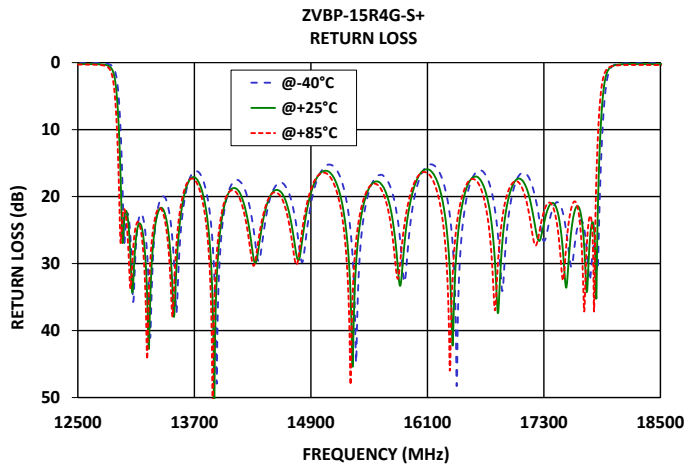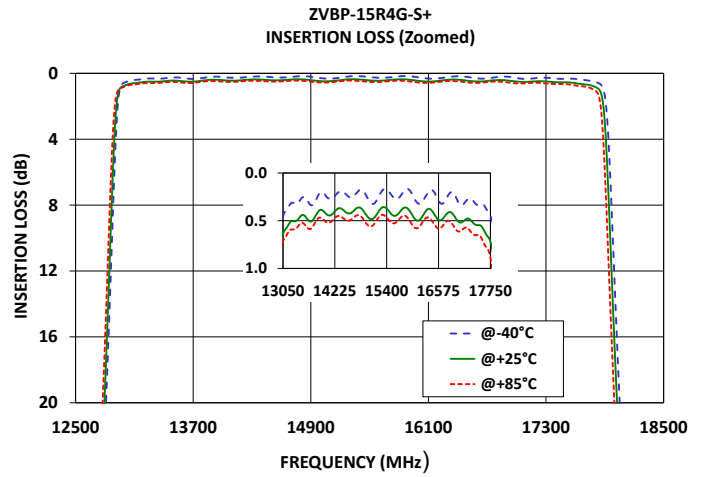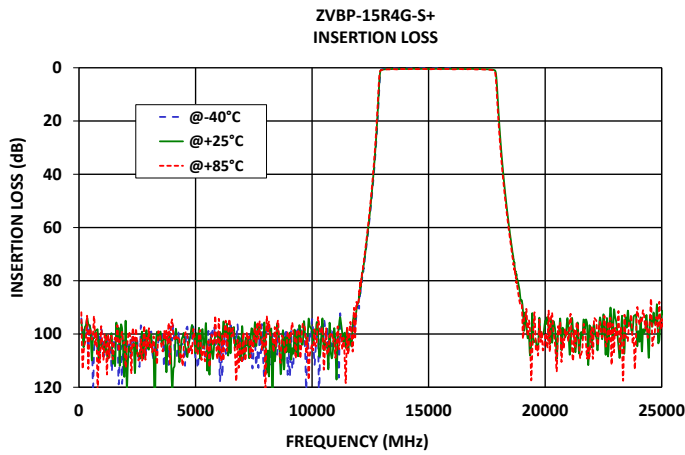



CAVITY COAXIAL

Bandpass Filter

ZVBP-15R4G-S+


Mini-Circuits

50Ω 13.05 to 17.75 GHz SMA Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 ¹	1	SMA Female
RF2 ¹	2	SMA Female

CASE STYLE DRAWING

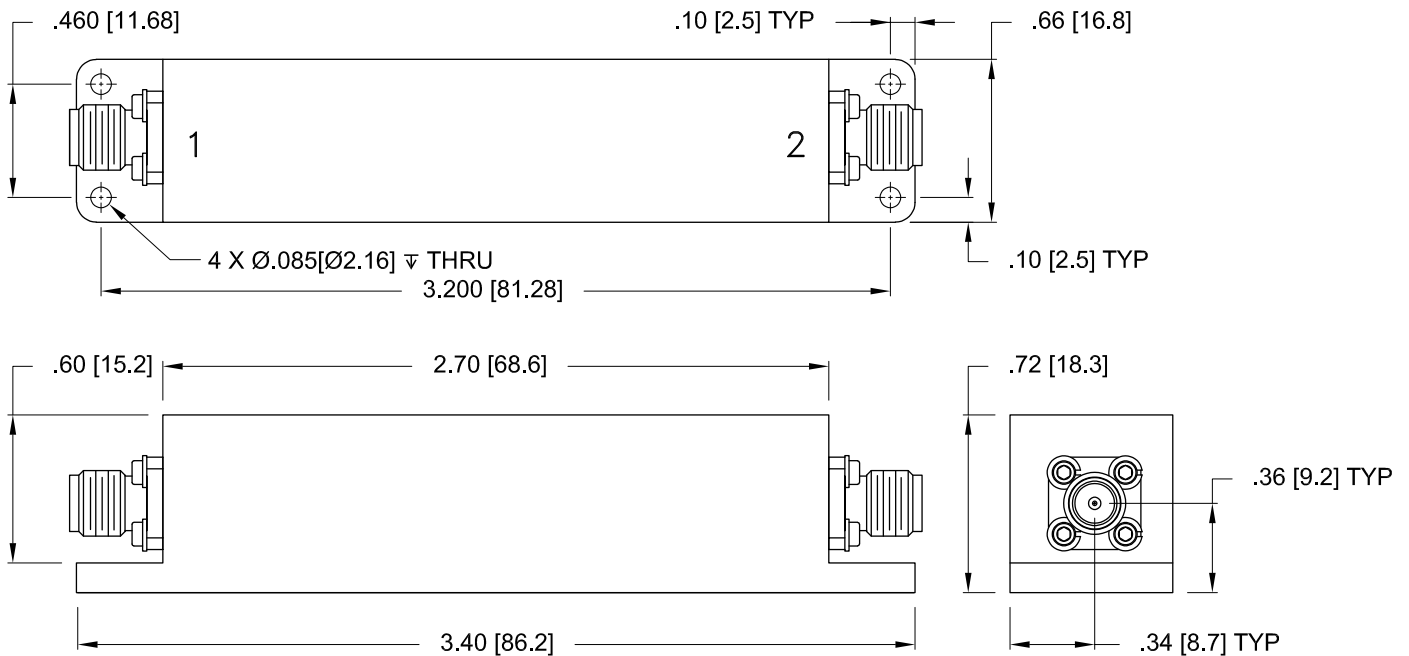

Unit Weight: 62 Grams.

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .100(2.54); 3 Pl. ± .015(.381)

PRODUCT MARKING*: ZVBP-15R4G-S+

*Marking may contain other features or characters for internal lot control.





CAVITY COAXIAL

Bandpass Filter

ZVBP-15R4G-S+

Mini-Circuits

50Ω 13.5 to 17.75 GHz SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	<p>Data</p> <p>Graphs</p> <p>S-Parameter (S2P Files) Data Set (.zip file)</p>
Case Style	AAB3552
RoHS Status	Compliant
Environmental Ratings	ENV46

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

