



CAVITY COAXIAL

# Bandpass Filter

## ZVBP-7220-S+

Mini-Circuits

50Ω

7120 to 7320 MHz SMA Female

### KEY FEATURES

- Low Insertion Loss, 1.5 dB Typ.
- Good Return Loss, 18 dB Typ.
- High Rejection, 80 dB Typ.
- Wide Stopband up to 13000 MHz
- Power Handling : 5 Watts

### APPLICATIONS

- Telecommunication
- Satellite Communications
- Radar Systems


### PRODUCT OVERVIEW

Mini-Circuits' ZVBP-7220-S+ is a coaxial cavity filter designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. Mini-Circuits' coaxial cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical.



Generic photo used for illustration purposes only

### FUNCTIONAL DIAGRAM

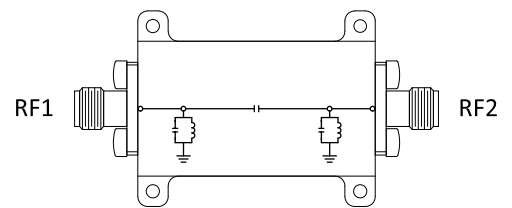

### ELECTRICAL SPECIFICATIONS<sup>1</sup> AT +25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units	
Passband	Center Frequency	—	—	7220	—	MHz	
	Insertion Loss	F1-F2	7120 - 7320	—	1.5	2.5	dB
	Return Loss	F1-F2	7120 - 7320	10	18	—	dB
Stopband, Lower	Rejection	DC-F3	DC - 6400	70	80	—	dB
		F3-F4	6400 - 6850	40	50	—	
		F4-F5	6850 - 7020	10	20	—	
Stopband, Upper	Rejection	F6-F7	7420 - 7600	10	20	—	dB
		F7-F8	7600 - 8000	40	50	—	
		F8-F9	8000 - 13000	70	80	—	


1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

### ABSOLUTE MAXIMUM RATINGS<sup>2,3</sup>

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power <sup>4</sup>	5 W at +25°C

2. Permanent damage may occur if any of these limits are exceeded.  
 3. Input and output ports are DC short to ground.  
 4. Power rating applies only to signals within the passband.

### TYPICAL FREQUENCY RESPONSE AT +25°C

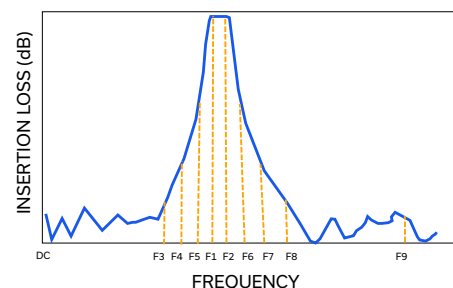



CAVITY COAXIAL

# Bandpass Filter





## ZVBP-7220-S+

Mini-Circuits

50Ω

7120 to 7320 MHz SMA Female

### TYPICAL PERFORMANCE GRAPHS

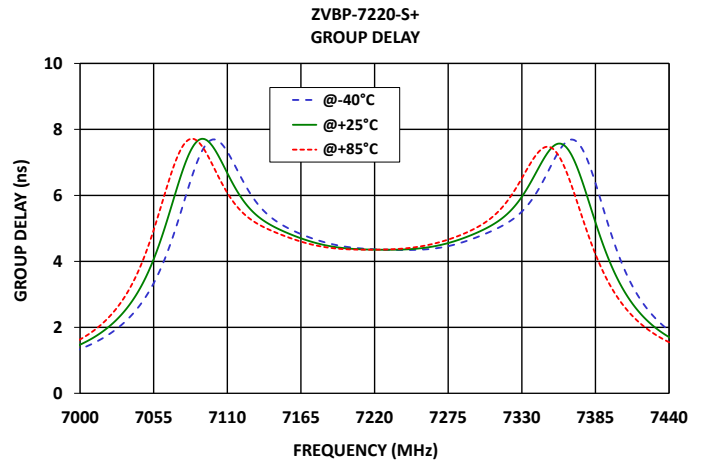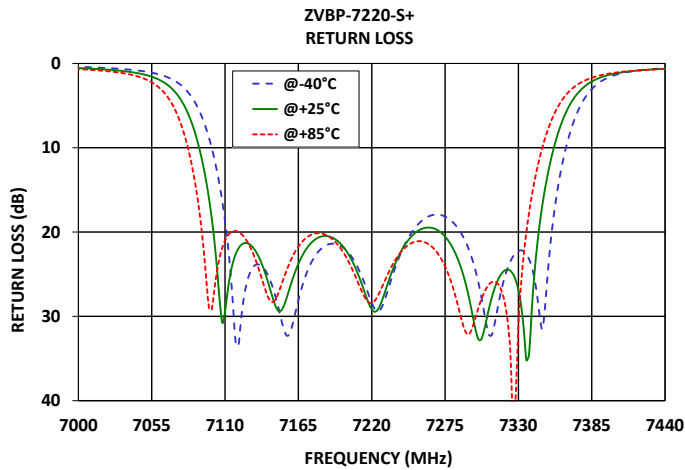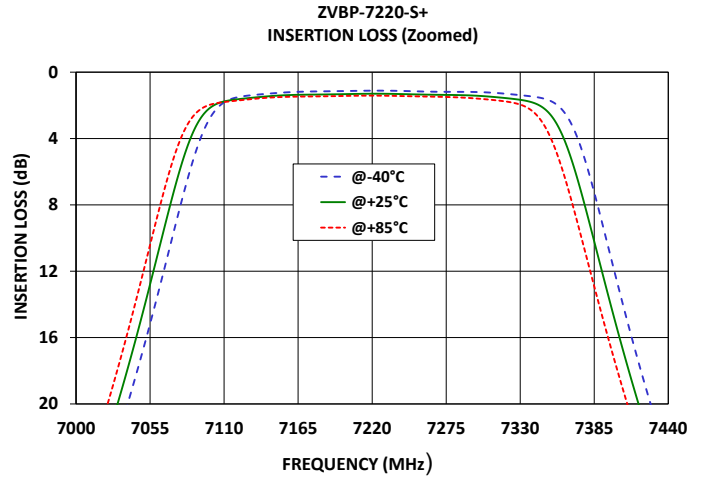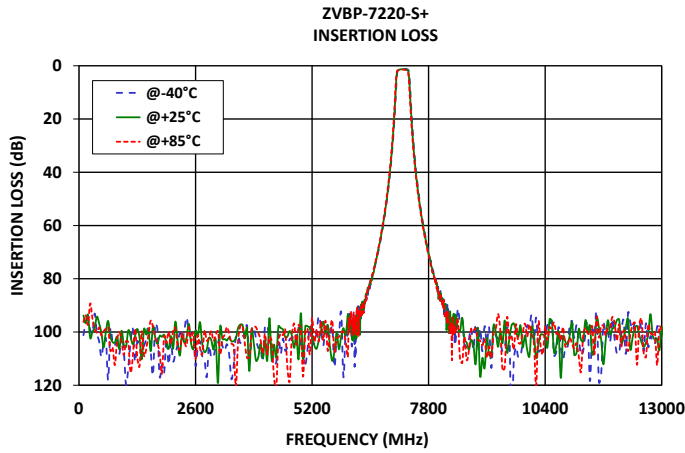



CAVITY COAXIAL

# Bandpass Filter

## ZVBP-7220-S+


50Ω

7120 to 7320 MHz SMA Female

### CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 <sup>1</sup>	1	SMA Female
RF2 <sup>1</sup>	2	SMA Female

### CASE STYLE DRAWING

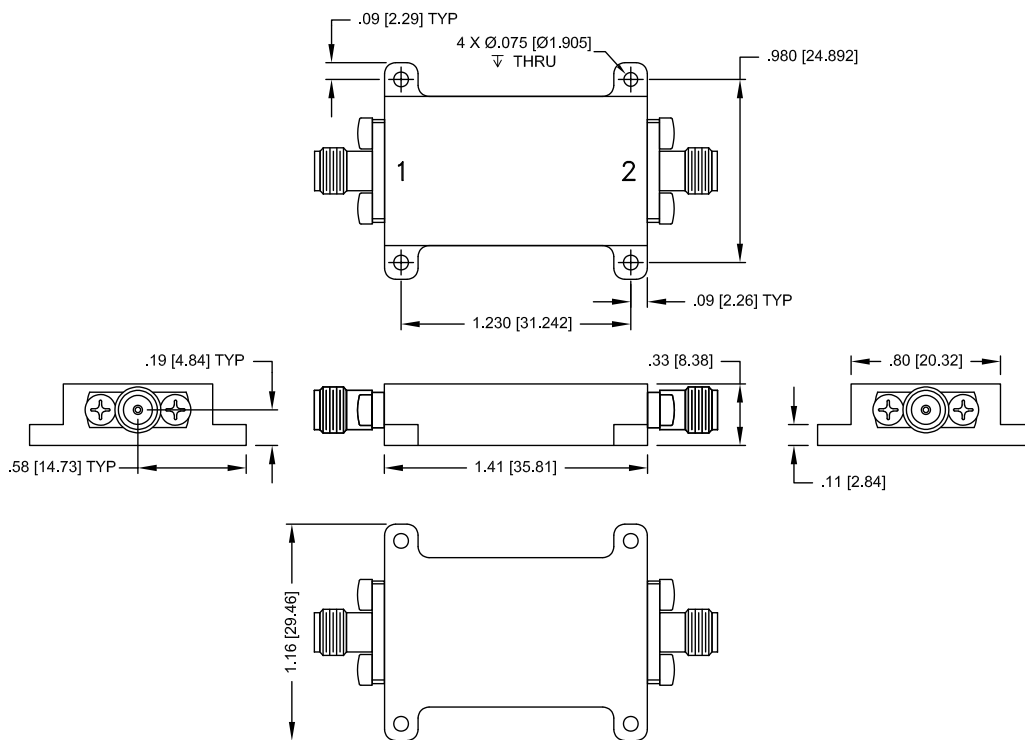

Unit weight: 21 grams

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .100(2.540)$ ; 3 Pl.  $\pm .015(0.381)$

**PRODUCT MARKING\*:** ZVBP-7220-S+

\*Marking may contain other features or characters for internal lot control.





CAVITY COAXIAL

# Bandpass Filter

## ZVBP-7220-S+

Mini-Circuits

50Ω

7120 to 7320 MHz SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	<p>Data</p> <p>Graphs</p> <p>S-Parameter (S2P Files) Data Set (.zip file)</p>
Case Style	AAV3653
RoHS Status	Compliant
Environmental Ratings	ENV46

### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

