



Mini-Circuits

CAVITY COAXIAL

Bandpass Filter

ZVBP-7736-S+

50Ω

7685 to 7787 MHz SMA Female

KEY FEATURES

- Low Insertion Loss, 0.9 dB Typ.
- Good Return Loss, 18 dB Typ.
- High Rejection, 93 dB Typ.
- Stopband up to 16 GHz
- Power Handling 10 Watts

APPLICATIONS

- Test and Measurements


PRODUCT OVERVIEW

Mini-Circuits' ZVBP-7736-S+ is a coaxial cavity filter designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. Mini-Circuits' coaxial cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

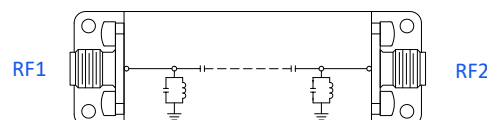

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	—	—	7736	—	MHz
	Insertion Loss	F1-F2	7685 - 7787	—	0.9	1.2	dB
	Return Loss	F1-F2	7685 - 7787	14	18	—	dB
Stopband, Lower	Rejection	DC-F3	DC - 6715	80	88	—	dB
		F3-F4	6715 - 7475	40	45	—	
Stopband, Upper	Rejection	F5-F6	8000 - 8800	40	47	—	dB
		F6-F7	8800 - 16000	80	93	—	

ABSOLUTE MAXIMUM RATINGS^{2,3}


Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁴	10 W max. at +25°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Input and output ports are DC short to ground.

4. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

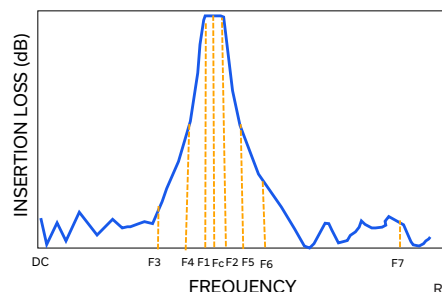

REV. OR
ECO-027556
ZVBP-7736-S+
EDU4972
URJ
251105





Mini-Circuits

CAVITY COAXIAL





Bandpass Filter

ZVBP-7736-S+

50Ω

7685 to 7787 MHz SMA Female

TYPICAL PERFORMANCE GRAPHS

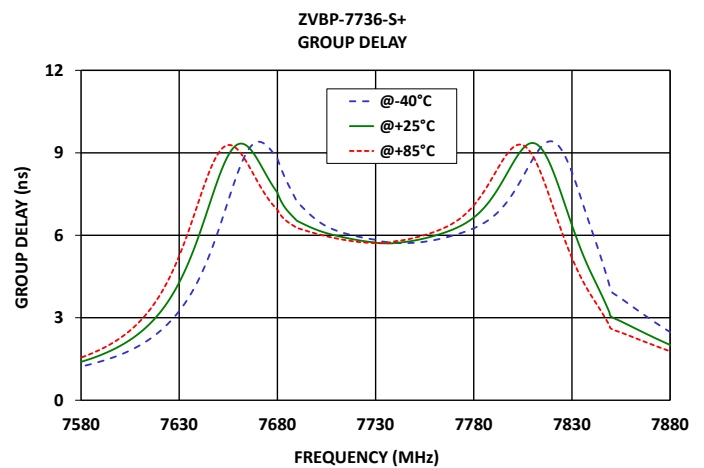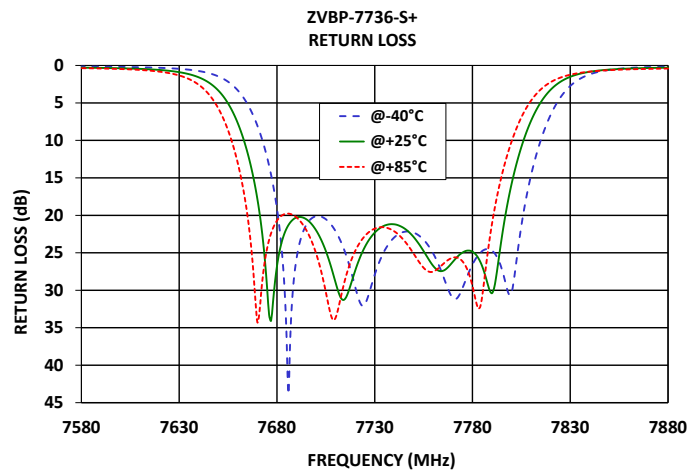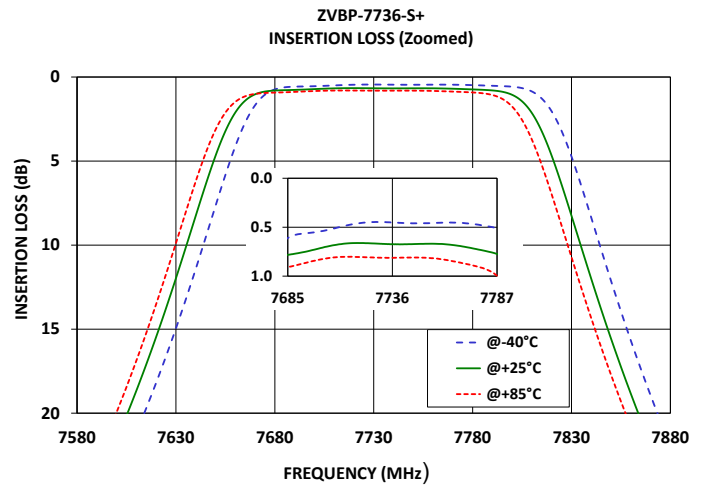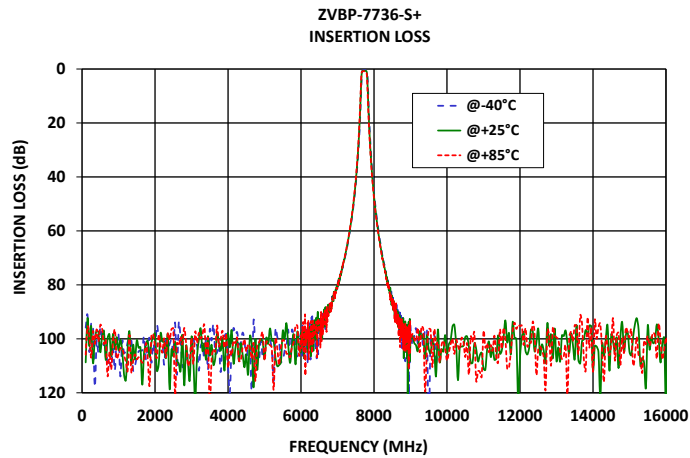



CAVITY COAXIAL

Bandpass Filter

ZVBP-7736-S+

Mini-Circuits

50Ω


7685 to 7787 MHz SMA Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 ¹	1	SMA Female
RF2 ¹	2	SMA Female

1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

CASE STYLE DRAWING

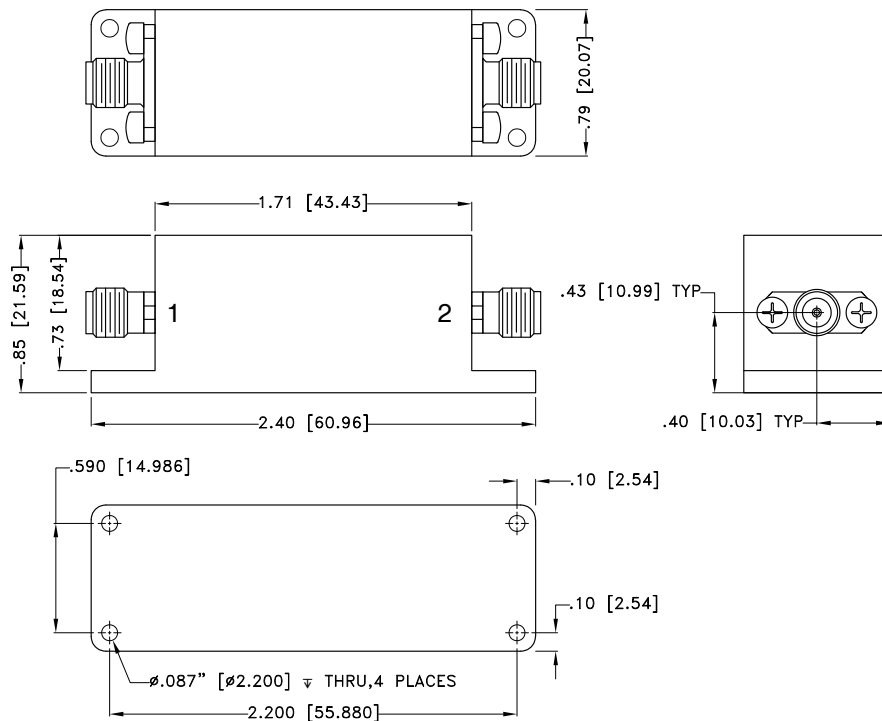

Unit weight: 90 grams

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .10$ (2.54); 3 Pl. $\pm .015$ (0.381)

PRODUCT MARKING*: ZVBP-7736-S+

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

CAVITY COAXIAL

Bandpass Filter

ZVBP-7736-S+

50Ω

7685 to 7787 MHz

SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	BAD3623
RoHS Status	Compliant
Environmental Ratings	ENV46

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

