



LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-5001+

50Ω 4.5 to 5.3 GHz

THE BIG DEAL

- LTCC Band Pass Filter with Integrated Interposer Board
- Wide Stopband Rejection, Typ. 54 dB up to 13 GHz
- Small Size, 4.95 mm x 3.65 mm
- Shielded Construction
- Protected by US Patents 11,638,370 and 11,744,057




Generic photo used for illustration purposes only

APPLICATIONS

- Satellite Communication
- Aerospace and Defense Signal Conditioning
- Quantum Computing

FUNCTIONAL DIAGRAM

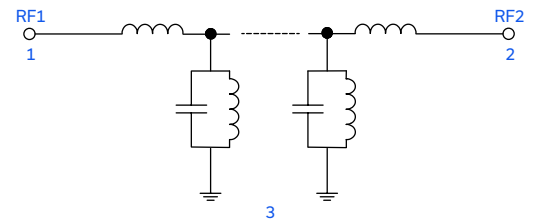

PRODUCT OVERVIEW

BFHKI-5001+ is a miniature low temperature co-fired ceramic (LTCC) ultra-high stopband rejection band pass filter with a 4.5 to 5.3 GHz passband that supports a variety of applications. This model achieves 54 dB typical stopband rejection up to 13 GHz, when mounted on coplanar waveguide layouts. Housed in a small 4.95 mm by 3.65 mm ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The BFHKI family with integrated interposer board enables installation onto PCB layouts with automated manufacturing equipment. This model provides 3.6 dB typical insertion loss over a wide band due to its rugged monolithic construction. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

| Features | Advantages |
|--|---|
| Surface Mountable due to Integrated Interposer Board | Enables installation with automated manufacturing equipment, making this suitable for high-volume processes. |
| Wide Rejection | Provides high stopband rejection of 54 dB typical up to 13 GHz. |
| Small Size (4.95 x 3.65 mm) | Saves space in dense circuit board layouts and minimizes the effects of parasitics. |
| LTCC Construction | Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes. |
| Cost Effective | LTCC is a scalable technology that is cost effective due to its ease of production in high-volume. |

REV. OR
ECO-023769
BFHKI-5001+
MCL NY
241127





ELECTRICAL SPECIFICATIONS^{1,2,3} AT +25°C

| Parameter | | F# | Frequency (GHz) | Min. | Typ. | Max. | Units |
|-----------------|-------------------------------|-------|-----------------|------|------|------|-------|
| Passband | Center Frequency ⁴ | — | — | — | 4.9 | — | GHz |
| | Insertion Loss | F1-F2 | 4.5 - 5.3 | — | 3.6 | 4.5 | dB |
| | Return Loss | F1-F2 | 4.5 - 5.3 | 12 | 14 | — | dB |
| Stopband, Lower | Rejection | DC-F3 | 0.1 - 2.5 | 63 | 73 | — | dB |
| | | F3-F4 | 2.5 - 3.4 | 40 | — | — | |
| Stopband, Upper | Rejection | F5-F6 | 6.8 - 10.2 | 53 | 63 | — | dB |
| | | F6-F7 | 10.2 - 13 | 44 | 54 | — | |


1. Tested on Evaluation Board P/N TB-BFHKI-5001C+. Measured with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.
2. Bi-directional, RF1 and RF2 ports can be interchanged.
3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.
4. Typical variation ±3%.

ABSOLUTE MAXIMUM RATINGS⁵

| Parameter | Ratings |
|--------------------------|-----------------|
| Operating Temperature | -55°C to +125°C |
| Storage Temperature | -55°C to +125°C |
| Input Power ⁶ | 1 W |

5. Permanent damage may occur if any of these limits are exceeded.
6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +125°C.

TYPICAL FREQUENCY RESPONSE AT +25°C

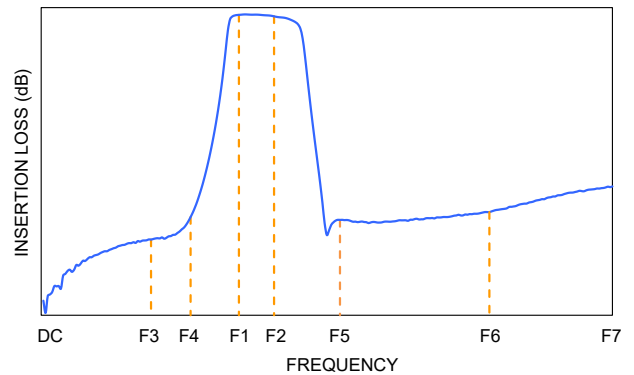



LTCC SURFACE MOUNT





Bandpass Filter

BFHKI-5001+

Mini-Circuits

50Ω 4.5 to 5.3 GHz

TYPICAL PERFORMANCE GRAPHS

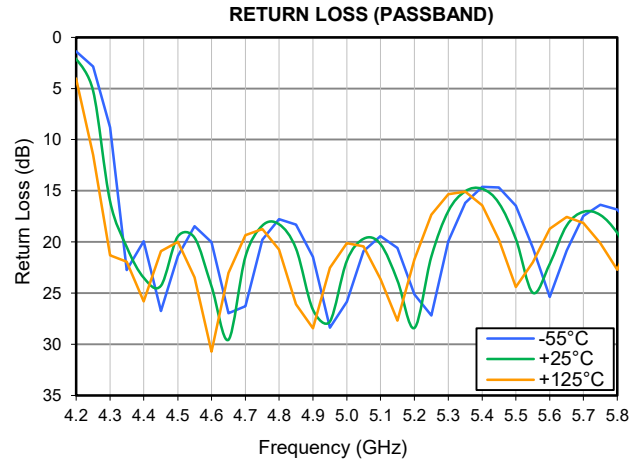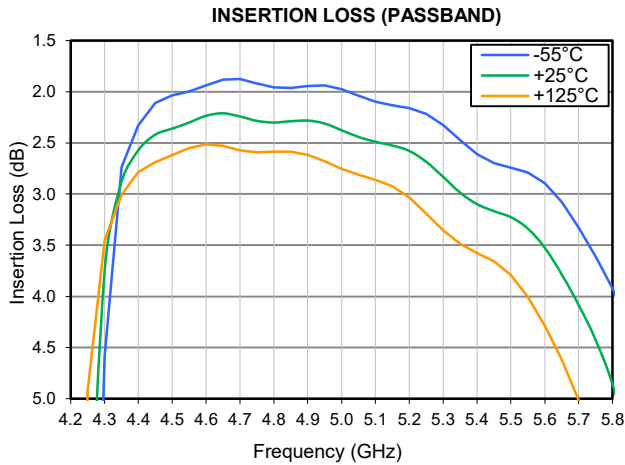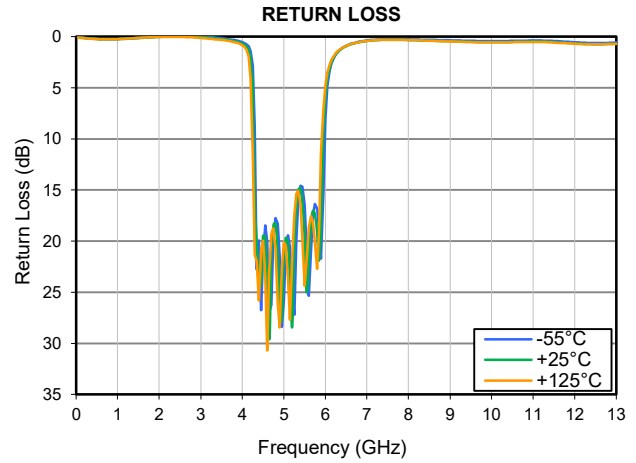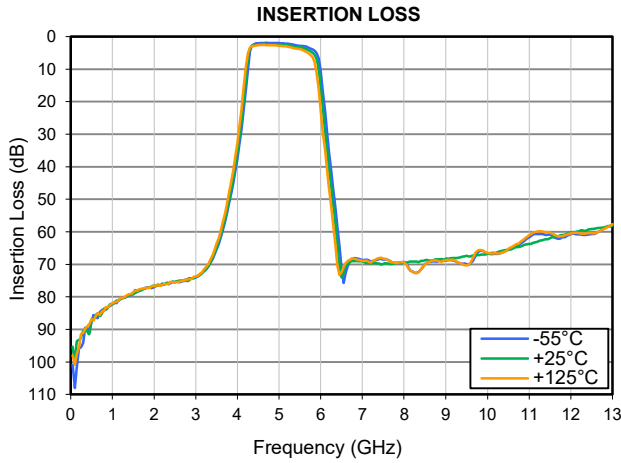



FUNCTIONAL DIAGRAM


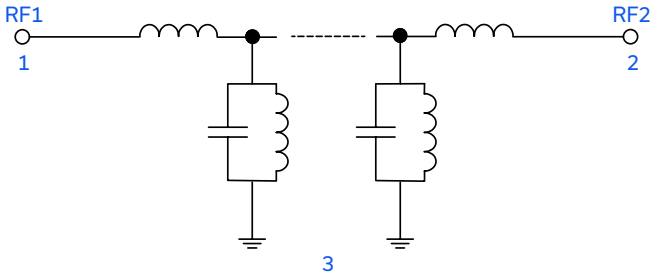


Figure 1. BFHKI-5001+ Functional Diagram

PAD DESCRIPTION

| Function | Pad Number | Description |
|------------------|------------|---|
| RF1 ² | 1 | Connects to RF Input Port |
| RF2 ² | 2 | Connects to RF Output Port |
| GROUND | 3 | Connects to Ground on PCB, (See drawing PL-767) |


SUGGESTED PCB LAYOUT (PL-767)

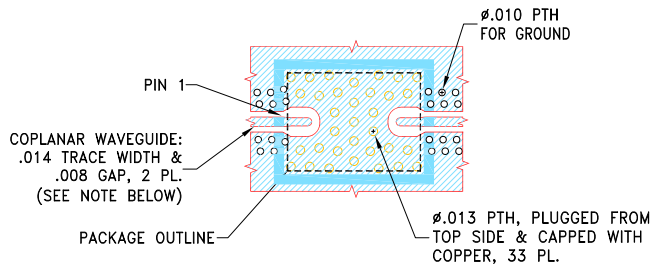

- NOTES:
- PCB IS MULTILAYER PCB, SEE STACK-UP DIAGRAM.
 - TRACE WIDTH & GAP ARE SHOWN FOR .0079 MEGTRON-7 R5785(N/GN), COPPER: 1/2 OZ. EACH LAYER. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 - LAYERS L2, L3 & L4 OF PCB ARE CONTINUOUS GROUND PLANES.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.


STACK-UP DIAGRAM

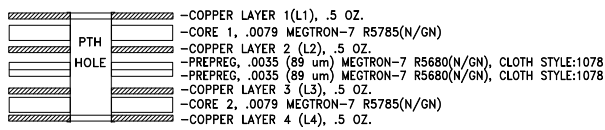

- TOTAL FINISHED THICKNESS 0.026 ± 10%.
- PTH PRESENT FROM COPPER LAYER 1 TO COPPER LAYER 4.

Figure 2. Suggested PCB Layout for BFHKI-5001+

CASE STYLE DRAWING (NM3237)

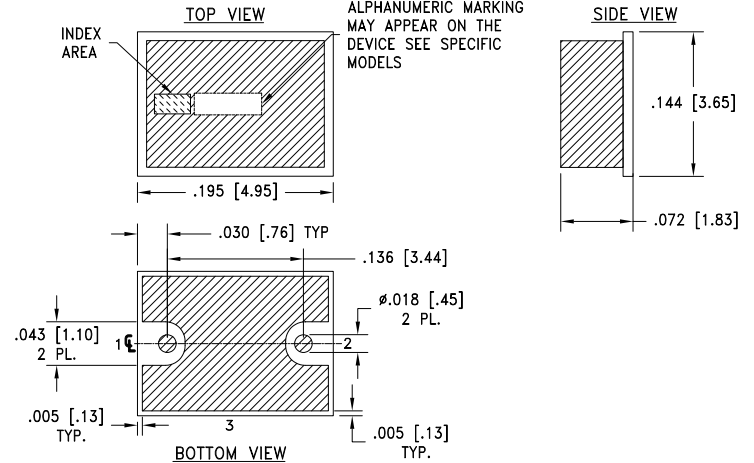

METALLIZATION

Weight: .135 grams.
Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.01; 3 Pl. ±.005

PRODUCT MARKING*: F561

*Marking may contain other features or characters for internal lot control.



LTCC SURFACE MOUNT

Bandpass Filter

BFHKI-5001+

50Ω 4.5 to 5.3 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

| | |
|---------------------------------|---|
| Performance Data & Graphs | Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads |
| Case Style | NM3237 Finish: Gold over Nickel Plating |
| RoHS Status | Compliant |
| Tape and Reel | TR-F77 |
| Suggested Layout for PCB Design | PL-767 |
| Evaluation Board | TB-BFHKI-5001C+ Gerber File |
| Environmental Rating | ENV06T12 |

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html







LTCC Bandpass Filter


Typical Performance Data

BFHKI-5001+

| FREQUENCY (GHz) | INSERTION LOSS (dB) | | | RETURN LOSS (dB) | | |
|--------------------|------------------------|--------|---------|---------------------|--------|---------|
| | @-55°C | @+25°C | @+125°C | @-55°C | @+25°C | @+125°C |
| 0.1 | 107.98 | 99.25 | 100.92 | 0.08 | 0.09 | 0.10 |
| 0.2 | 95.73 | 93.25 | 95.68 | 0.12 | 0.13 | 0.14 |
| 0.4 | 89.68 | 90.52 | 89.01 | 0.19 | 0.19 | 0.20 |
| 0.6 | 86.25 | 85.61 | 85.98 | 0.22 | 0.23 | 0.24 |
| 0.8 | 84.26 | 83.65 | 84.37 | 0.23 | 0.24 | 0.24 |
| 1.0 | 82.18 | 82.36 | 81.93 | 0.22 | 0.23 | 0.22 |
| 1.2 | 80.59 | 80.64 | 80.27 | 0.19 | 0.20 | 0.19 |
| 1.4 | 79.42 | 79.44 | 79.20 | 0.14 | 0.15 | 0.14 |
| 1.6 | 78.18 | 78.51 | 78.13 | 0.09 | 0.11 | 0.10 |
| 1.8 | 77.16 | 77.39 | 77.21 | 0.04 | 0.06 | 0.06 |
| 2.0 | 77.05 | 76.55 | 76.74 | -0.01 | 0.02 | 0.03 |
| 2.2 | 76.27 | 75.89 | 76.20 | -0.04 | -0.01 | 0.02 |
| 2.4 | 75.80 | 75.63 | 75.36 | -0.06 | -0.02 | 0.02 |
| 2.6 | 75.56 | 75.04 | 75.34 | -0.06 | -0.02 | 0.04 |
| 2.8 | 74.58 | 75.13 | 74.71 | -0.05 | 0.00 | 0.07 |
| 3.0 | 74.04 | 73.87 | 73.69 | -0.01 | 0.04 | 0.13 |
| 3.2 | 72.11 | 72.08 | 71.57 | 0.04 | 0.10 | 0.19 |
| 3.4 | 68.42 | 68.09 | 67.30 | 0.11 | 0.18 | 0.27 |
| 3.6 | 61.73 | 60.90 | 59.60 | 0.20 | 0.28 | 0.38 |
| 3.8 | 51.54 | 50.32 | 48.33 | 0.32 | 0.42 | 0.52 |
| 4.0 | 37.50 | 35.59 | 32.65 | 0.53 | 0.66 | 0.82 |
| 4.2 | 16.78 | 13.65 | 9.50 | 1.40 | 2.14 | 4.08 |
| 4.4 | 2.33 | 2.57 | 2.79 | 19.91 | 23.54 | 25.80 |
| 4.6 | 1.94 | 2.24 | 2.51 | 20.04 | 24.34 | 30.71 |
| 4.8 | 1.96 | 2.30 | 2.59 | 17.76 | 18.27 | 20.76 |
| 5.0 | 1.97 | 2.37 | 2.75 | 25.84 | 21.83 | 20.12 |
| 5.2 | 2.16 | 2.58 | 3.03 | 25.14 | 28.42 | 21.71 |
| 5.4 | 2.61 | 3.10 | 3.58 | 14.60 | 14.80 | 16.41 |
| 5.6 | 2.89 | 3.52 | 4.29 | 25.35 | 22.15 | 18.70 |
| 5.8 | 3.92 | 4.86 | 6.28 | 16.81 | 19.10 | 22.72 |
| 6.0 | 10.36 | 15.38 | 22.45 | 8.01 | 6.12 | 4.70 |
| 6.2 | 35.35 | 40.27 | 46.45 | 2.08 | 2.05 | 1.89 |
| 6.4 | 58.18 | 63.35 | 70.18 | 1.12 | 1.16 | 1.11 |
| 6.6 | 72.73 | 70.65 | 69.66 | 0.72 | 0.77 | 0.75 |
| 6.8 | 68.04 | 69.02 | 68.22 | 0.50 | 0.55 | 0.54 |
| 7.0 | 68.63 | 69.13 | 68.96 | 0.36 | 0.42 | 0.41 |
| 7.2 | 69.16 | 69.73 | 69.40 | 0.29 | 0.34 | 0.35 |
| 7.4 | 68.34 | 69.75 | 68.04 | 0.24 | 0.30 | 0.31 |
| 7.6 | 68.53 | 69.72 | 68.57 | 0.23 | 0.29 | 0.31 |
| 7.8 | 69.55 | 69.61 | 69.59 | 0.23 | 0.30 | 0.32 |
| 8.0 | 69.18 | 69.50 | 69.34 | 0.24 | 0.32 | 0.33 |
| 8.2 | 72.17 | 69.15 | 72.27 | 0.27 | 0.35 | 0.36 |
| 8.4 | 71.55 | 68.95 | 71.56 | 0.30 | 0.37 | 0.39 |
| 8.6 | 69.13 | 68.87 | 69.22 | 0.32 | 0.39 | 0.41 |
| 8.8 | 69.18 | 68.43 | 68.97 | 0.35 | 0.42 | 0.44 |
| 9.0 | 68.84 | 68.21 | 68.81 | 0.36 | 0.44 | 0.46 |
| 9.2 | 68.87 | 68.07 | 68.72 | 0.38 | 0.46 | 0.48 |
| 9.4 | 69.82 | 67.63 | 70.07 | 0.40 | 0.48 | 0.51 |
| 9.6 | 69.72 | 67.54 | 69.37 | 0.41 | 0.50 | 0.53 |
| 9.8 | 66.02 | 67.15 | 65.58 | 0.43 | 0.52 | 0.55 |
| 10.0 | 66.74 | 66.78 | 66.44 | 0.43 | 0.52 | 0.55 |
| 10.2 | 66.82 | 66.47 | 66.61 | 0.43 | 0.52 | 0.55 |
| 10.4 | 66.08 | 65.72 | 66.19 | 0.42 | 0.51 | 0.54 |
| 10.6 | 64.91 | 65.22 | 64.47 | 0.41 | 0.49 | 0.52 |
| 10.8 | 63.70 | 64.51 | 63.07 | 0.39 | 0.48 | 0.51 |
| 11.0 | 61.69 | 63.72 | 61.02 | 0.38 | 0.47 | 0.51 |
| 11.2 | 60.67 | 63.06 | 59.94 | 0.39 | 0.48 | 0.52 |
| 11.4 | 60.95 | 62.25 | 60.12 | 0.41 | 0.50 | 0.55 |
| 11.6 | 61.63 | 61.62 | 60.92 | 0.44 | 0.54 | 0.59 |
| 11.8 | 61.75 | 60.99 | 61.32 | 0.49 | 0.59 | 0.64 |
| 12.0 | 60.69 | 60.22 | 60.48 | 0.53 | 0.65 | 0.69 |
| 12.2 | 60.81 | 59.78 | 60.32 | 0.57 | 0.69 | 0.73 |
| 12.4 | 60.90 | 59.42 | 60.39 | 0.60 | 0.72 | 0.76 |
| 12.6 | 60.43 | 58.99 | 60.38 | 0.60 | 0.73 | 0.75 |
| 12.8 | 58.90 | 58.62 | 59.13 | 0.59 | 0.71 | 0.73 |
| 13.0 | 57.84 | 58.12 | 57.66 | 0.55 | 0.68 | 0.70 |

Typical Performance Data

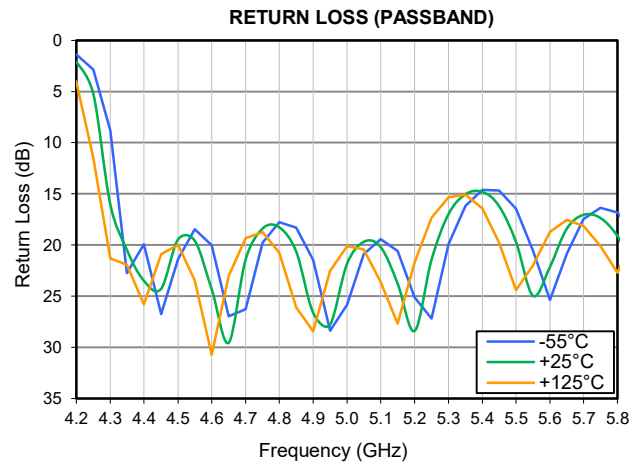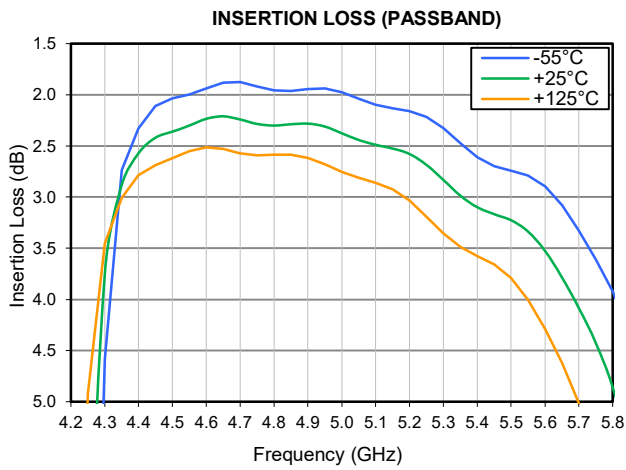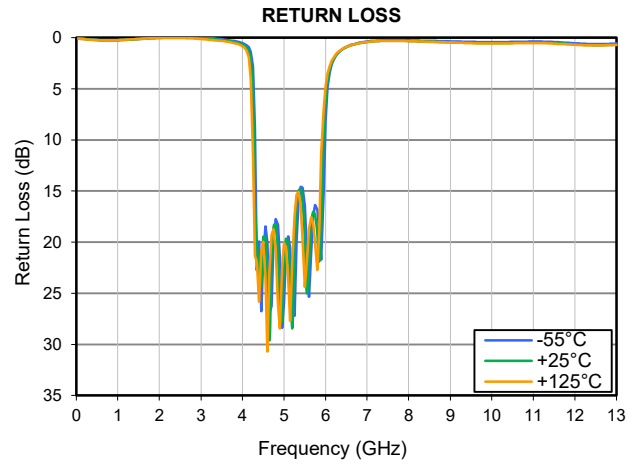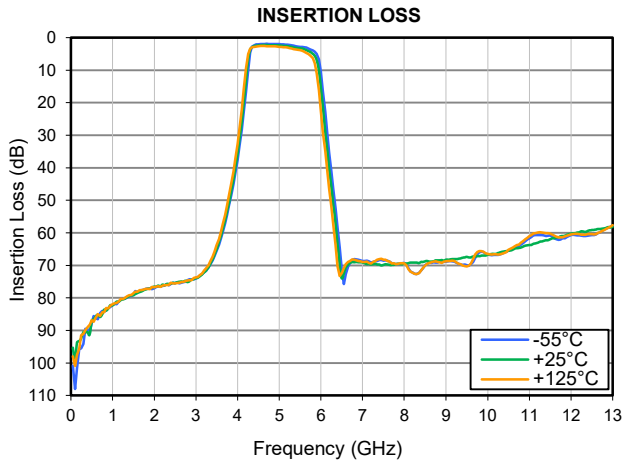

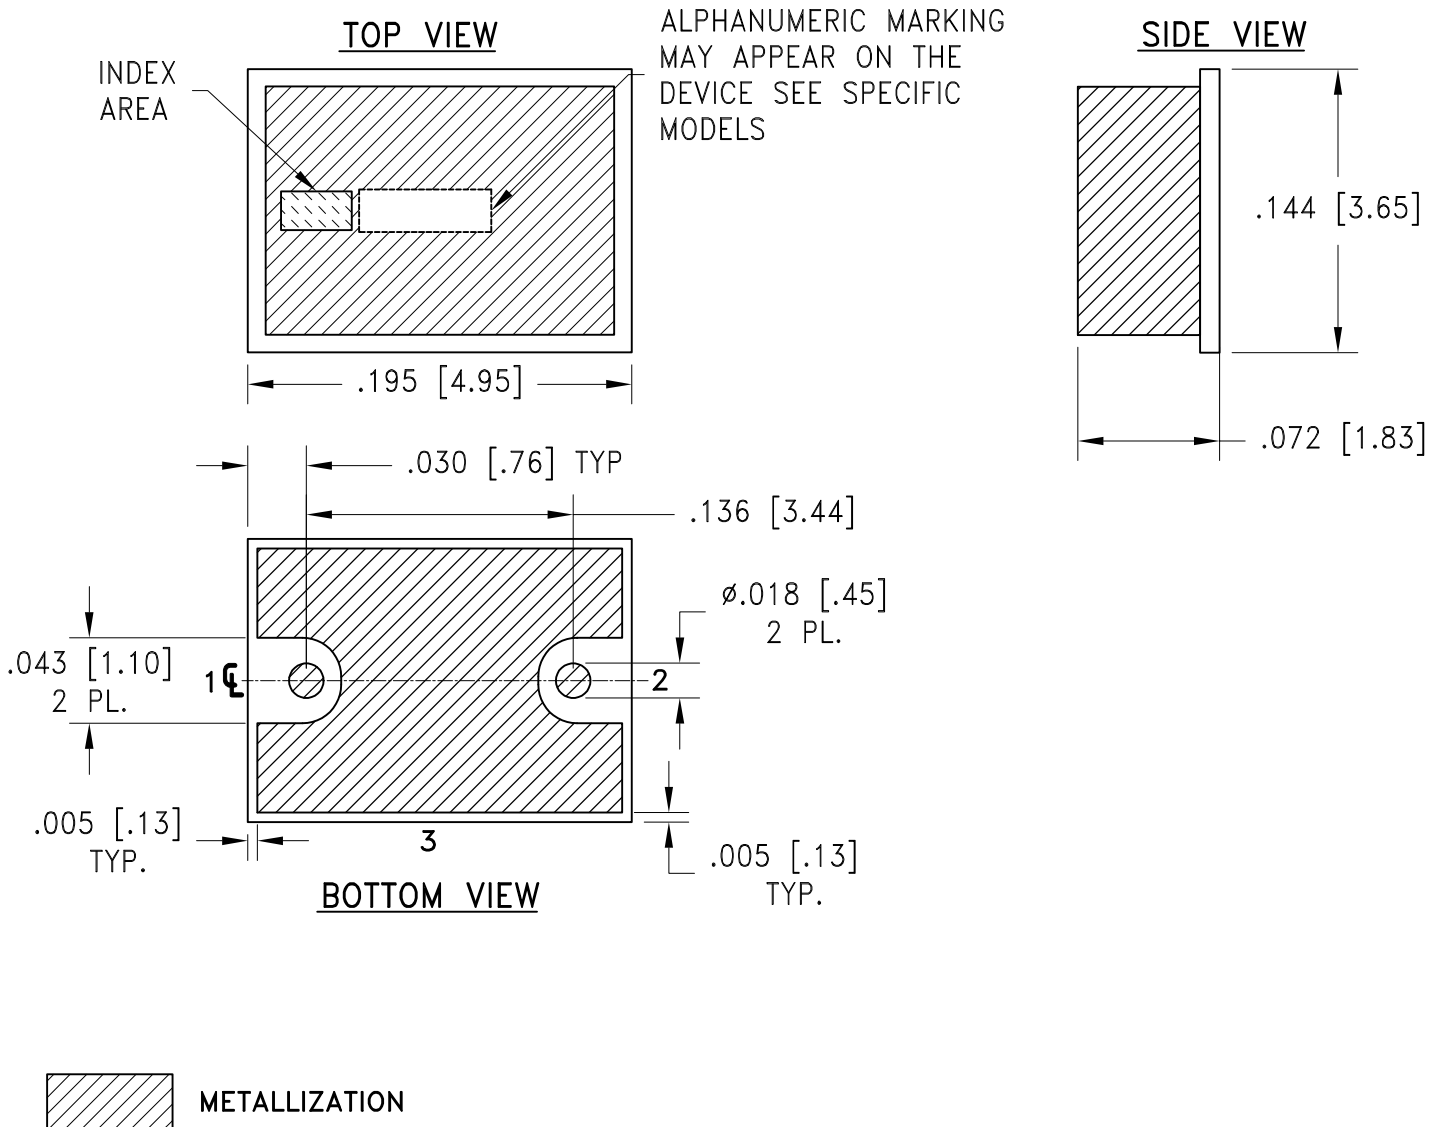


Weight: .135 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl.±.01; 3 Pl. ±.005

Notes:

1. Case material: LTCC on printed circuit board base.
2. Termination Finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Gold Plate over Nickel plate. All models, (+) suffix.

THIRD ANGLE PROJECTION




REVISIONS


| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|------------|-------------|----------|-----|------|
| OR | ECO-019771 | NEW RELEASE | 11/06/23 | ITG | IL |
| | | | | | |
| | | | | | |

SUGGESTED MOUNTING CONFIGURATION FOR NM3237 CASE STYLE

STACK-UP DIAGRAM

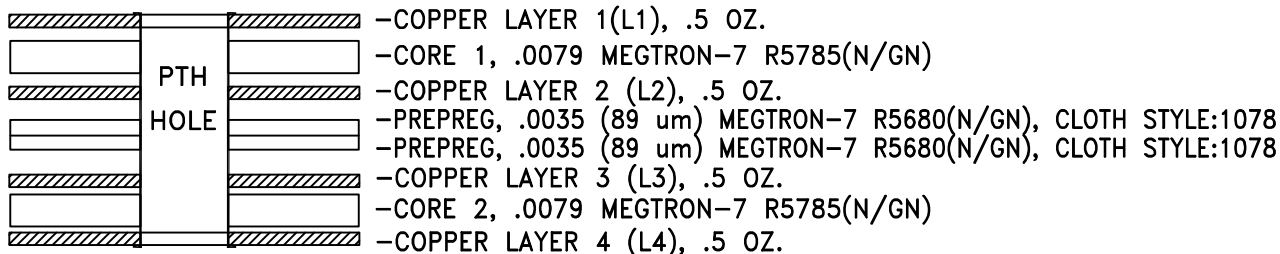

- TOTAL FINISHED THICKNESS 0.026 ± 10%.
- PTH PRESENT FROM COPPER LAYER 1 TO COPPER LAYER 4.

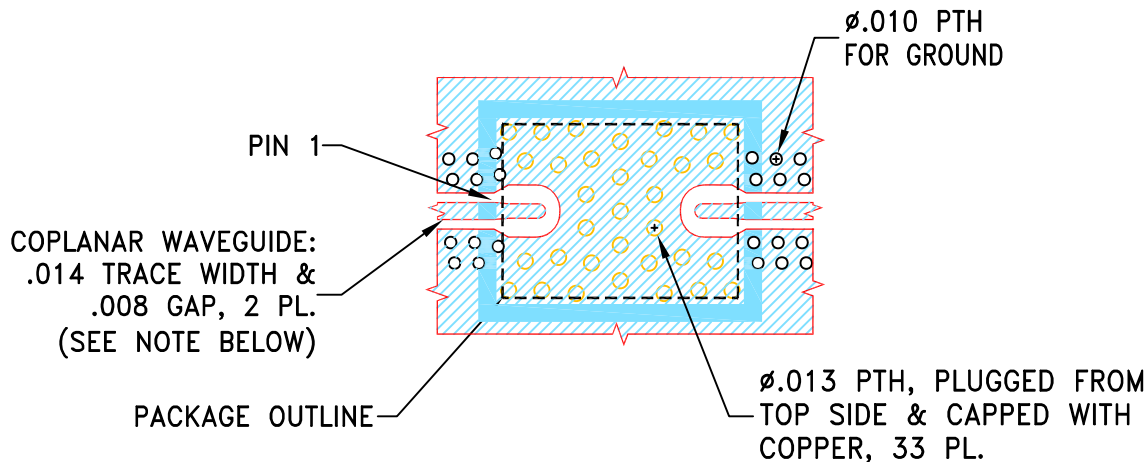

NOTES:

- PCB IS MULTILAYER PCB, SEE STACK-UP DIAGRAM.
- TRACE WIDTH & GAP ARE SHOWN FOR .0079 MEGTRON-7 R5785(N/GN), COPPER: 1/2 OZ. EACH LAYER. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- LAYERS L2, L3 & L4 OF PCB ARE CONTINUOUS GROUND PLANES.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

| UNLESS OTHERWISE SPECIFIED | INITIALS | DATE |
|----------------------------|----------|----------|
| DIMENSIONS ARE IN INCHES | ITG | 11/06/23 |
| TOLERANCES ON: | GF | 11/06/23 |
| 2 PL DECIMALS ± | IL | 11/06/23 |
| 3 PL DECIMALS ± .005 | | |
| ANGLES ± | | |
| FRACTIONS ± | | |



Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235

PL,NM3237, TB-BFHKI-XXXXC+

Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


| SIZE | CODE IDENT | DRAWING NO: | REV: |
|-------|------------|-------------|---------------|
| A | 15542 | 98-PL-767 | OR |
| FILE: | 98PL767 | SCALE: 6:1 | SHEET: 1 OF 1 |

Evaluation Board and Circuit

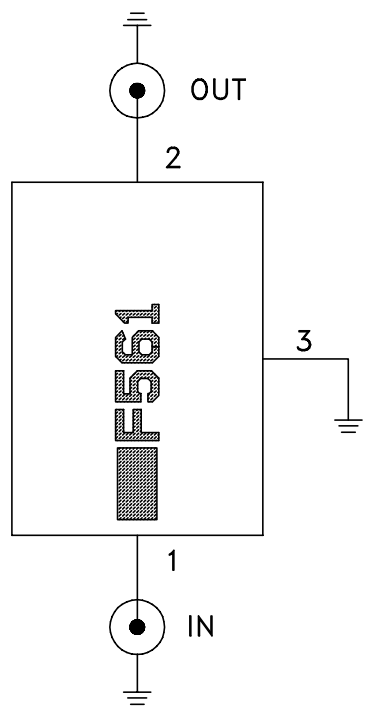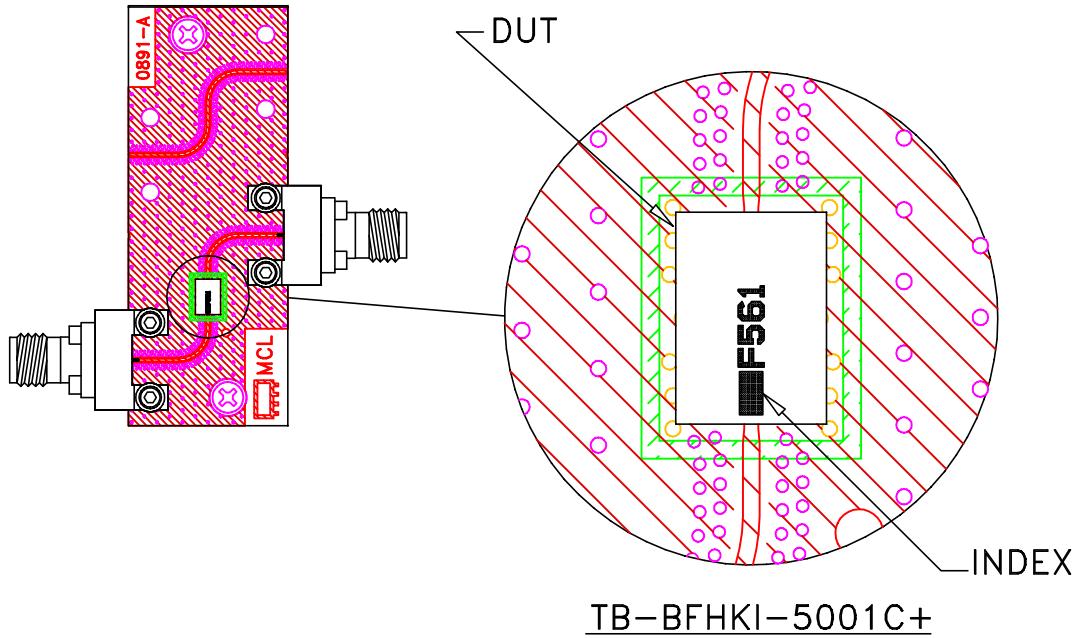

Schematic Diagram

1. 50 Ohm 2.92 mm Female end Launch connectors.
2. PCB Material: MEGTRON-7 R5785(N or GN) or equivalent, Dielectric Constant=3.37 Thickness=.0079 inch.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|-----------------------|---|--|
| Operating Temperature | -55° to 125° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -55° to 125° C Ambient Environment | Individual Model Data Sheet |
| Thermal Cycling | -55 to 125°C, 100 cycles, Dwell Time 15 minutes. | MIL-STD-202, Method 107, Condition A-3 |
| Humidity | 85°C, 90-95% Relative Humidity, 250hours | |
| Solderability | 10X / 30X Magnification | J-STD-002C Test S, J-STD-002C Test S1 |
| High Temp Storage | 125°C, 250 hours | |
| Bend Test | 1mm, deflection for 5 seconds Span of bending: 2.75" | -- |