



WIDEBAND


Low Noise Bypass Amplifier

TSS-53LNB+

50Ω 0.5 to 5 GHz

THE BIG DEAL

- Wideband: 0.5 to 5 GHz
- Built-in Bypass switching
- Low Noise figure: 1.4 dB typ. at 2.0 GHz
- High Gain: 21.7 dB typ. at 2 GHz
- Ultra Flat Gain: 0.7 dB from 0.7 to 2.1 GHz
- P1dB: +21 dBm typ. at 2.0 GHz
- Minimal matching components
- Specified over full band operation



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- Wireless Base Station Systems
- Test and Measurement Systems
- Multi-Band Receivers

PRODUCT OVERVIEW

TSS-53LNB+ (RoHS compliant) is an advanced ultra-flat gain Low Noise wideband amplifier fabricated using E-PHEMT technology offering extremely high dynamic range over a broad frequency range. It has integrated switches enabling users to bypass the amplifier during high signal conditions. In addition, the TSS-53LNB+ has good input and output return loss over a broad frequency range without the need for external matching components. It is enclosed in a 12-lead 3x3mm MCLP package for good thermal performance.

KEY FEATURES

| Feature | Advantages |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ultra-wideband: 500 MHz to 5 GHz | Ideal for a wide range of receiver applications including military, commercial wireless, and instrumentation. |
| Very flat gain | Ideal for broadband or multi-band applications. Just one, cost-efficient model required for multiple frequency usage. |
| Minimal external matching components required. 15 dB return loss typ. | Minimizes the need for external matching networks, simplifying circuit designs, and enabling the amplifier to operate over multiple bands in a single application circuit. |
| High IP3: 48 dBm typ. (bypass mode) | Provides enhanced linearity over broad frequency range under high signal conditions. |
| Internal bypass switch feature | Unique design handles low to high signal levels with minimal noise distortion. |
| Built-in DC blocking cap at RF-Out port & separate pads for RF-Out & Vdd | Simplifies biasing eliminates need for Bias-Tee at output. |
| Compact size: 3 x 3 x 0.9 mm | Saves space in dense system layouts. Low inductance, repeatable transitions, and excellent thermal contact. |

REV. B
 ECO-011809
 TSS-53LNB+
 MCL NY
 240805



**WIDEBAND**

Low Noise Bypass Amplifier

TSS-53LNB+

Mini-Circuits

50Ω 0.5 to 5 GHz

ELECTRICAL SPECIFICATIONS¹ AT +25°C, Z_O=50Ω AND V_{DD}=+5V, UNLESS OTHERWISE NOTED

| Parameter | Condition (GHz) | Amplifier-ON | | | Amplifier-Bypass | Units | | |
|-----------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------|-------|-------|------------------|-------|---------------------|----|
| | | Min. | Typ. | Max. | Typ. | | | |
| Frequency Range | | 0.5 | | 5.0 | | GHz | | |
| Noise Figure | 0.5 | | 1.3 | | 0.7 | dB | | |
| | 1.0 | | 1.2 | | 0.9 | | | |
| | 2.0 | | 1.4 | | 0.9 | | | |
| | 3.0 | | 1.4 | | 1.0 | | | |
| | 4.0 | | 1.6 | | 1.4 | | | |
| Gain | 0.5 | — | 22.8 | — | -0.7 | dB | | |
| | 1.0 | — | 22.7 | — | -0.7 | | | |
| | 2.0 | 19.5 | 21.7 | 23.9 | -0.9 | | | |
| | 3.0 | — | 20.5 | — | -1.0 | | | |
| | 4.0 | — | 19.5 | — | -0.9 | | | |
| Gain Flatness | 0.7 - 2.1 | | ±0.7 | | ±0.14 | dB | | |
| | 0.5 | — | 16.0 | | 25.8 | | dB | |
| | 1.0 | — | 15.1 | | 18.5 | | | |
| | 2.0 | 10.5 | 14.5 | | 12.3 | | | |
| | 3.0 | — | 13.1 | | 11.1 | | | |
| Input Return Loss | 4.0 | — | 14.5 | | 14.5 | dB | | |
| | 5.0 | — | 16.9 | | 16.9 | | | |
| | 0.5 | | 11.8 | | 22.8 | | dB | |
| | 1.0 | | 12.5 | | 17.1 | | | |
| | 2.0 | | 17.0 | | 12.6 | | | |
| 3.0 | | 14.1 | | 11.7 | | | | |
| 4.0 | | 10.7 | | 14.0 | | | | |
| Output Return Loss | 5.0 | | 10.0 | | 11.9 | dB | | |
| | 0.5 | | +21.1 | | +32.0 | | dBm | |
| | 1.0 | | +21.0 | | — | | | |
| | 2.0 | | +20.6 | | +33.0 | | | |
| | 3.0 | | +20.1 | | — | | | |
| Output Power @1dB compression AMP-ON ² Input Power @1dB compression AMP-Bypass ² | 4.0 | | +20.2 | | — | | | |
| | 5.0 | | +19.2 | | +27.0 | | | |
| | 0.5 | | +35.1 | | +48.0 | dBm | | |
| | 1.0 | | +34.5 | | +48.4 | | | |
| | 2.0 | | +33.9 | | +45.2 | | | |
| 3.0 | | +32.7 | | +42.9 | | | | |
| 4.0 | | +33.4 | | +42.0 | | | | |
| Output IP3 | 5.0 | | +30.9 | | +40.8 | dBm | | |
| | Device Operating Voltage (V _{dd}) | | +4.8 | +5.0 | +5.2 | | +4.8-5.2 (5.0 typ.) | V |
| | Device Operating Current (I _d) | | | +82 | 105 | | 2 | mA |
| | Enable Voltage (V _e) | | | +5.0 | | | 0 | V |
| | Enable Control Current (I _e) | | | +2.0 | | | 0 | mA |
| DC Current (I _d) Variation Vs. Temperature ⁽³⁾ | | | | -19 | — | μA/°C | | |
| DC Current (I _d) Variation Vs. Voltage | | | | 0.008 | — | mA/mV | | |
| Thermal Resistance, junction-to-ground lead | | | | 60 | — | °C/W | | |

1. Measured on Mini-Circuits Characterization test board TB-780+. See Characterization Test Circuit (Fig. 1)

2. Current increases at P1dB

3. (Current at 85°C - Current at -45°C)/130



WIDEBAND

Low Noise Bypass Amplifier

TSS-53LNB+

50Ω 0.5 to 5 GHz

ABSOLUTE MAXIMUM RATINGS⁵

| Parameter | | Ratings |
|-------------------------------------|------------------|-------------------------------------------|
| Operating Temperature (ground lead) | | -40°C to +85°C |
| Storage Temperature | | -65°C to +150°C |
| Total Power Dissipation | | 0.7 W |
| Input Power | Amplifier-ON | +8 dBm (continuous), 19 dBm (5 min max.) |
| | Amplifier Bypass | +16 dBm (continuous), 29 dBm (5 min max.) |
| DC Voltage Vdd | | +7.0 V |
| DC Voltage Enable | | +7.0 V |
| Max. Voltage on pad 8 | | +15 V |

5. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are not intended for continuous normal operation.


ENABLE VOLTAGE (VE) FIG. 1

| | Min. | Typ. | Max. | Units |
|------------------|------|------|------|-------|
| Amplifier-ON | 4.5 | 5.0 | 5.5 | V |
| Amplifier-Bypass | 0 | — | 0.5 | V |

SWITCHING SPECIFICATIONS (RISE/FALL TIME)

| Parameter | | Min. | Typ. | Max. | Units |
|-------------------------|----------------------------------|------|------|------|-------|
| Amplifier ON to Bypass | OFF TIME (50% Control to 10% RF) | — | 50 | — | ns |
| | FALL TIME (90 to 10% RF) | — | 12 | — | |
| Amplifier Bypass to ON | ON TIME (50% Control to 90% RF) | — | 740 | — | ns |
| | RISE TIME (10% to 90% RF) | — | 240 | — | |
| Control Voltage Leakage | | — | 65 | — | mV |

SIMPLIFIED SCHEMATIC AND BONDING PAD DESCRIPTION

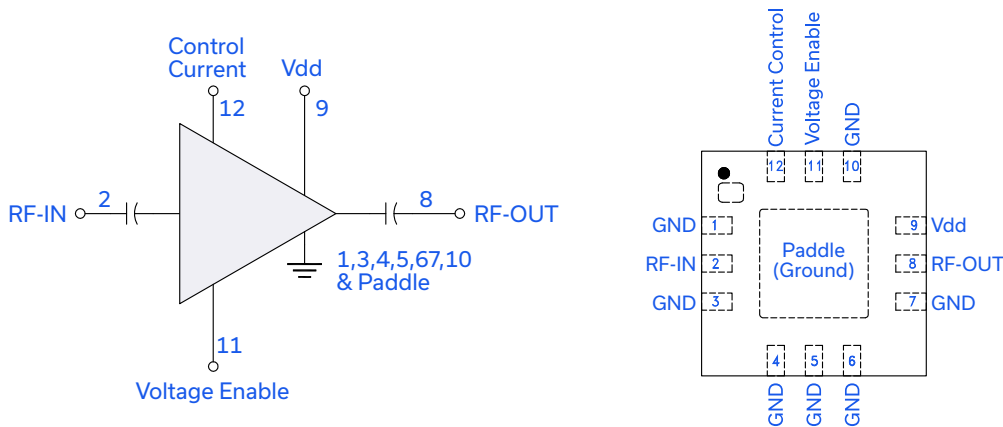

| Function | Pad Number | Description (See Figure 2) |
|-----------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| RF-IN | 2 | RF-Input pad. Connect to Ground Via L1. Add a DC blocking cap in series of appropriate value if required. |
| RF-OUT | 8 | RF-Output pad. No external DC blocking cap required. |
| Current Control | 12 | Control Current pad, voltage level on this pad sets the I _{dd} . Connect to pad 11 via 3.92 kΩ resistor. |
| Voltage Enable | 11 | Voltage Enable Pad. Voltage level on this pad determines Amplifier is ON or bypassed. |
| Vdd | 9 | Supply Voltage Pad. Connect to Vdd via L2. |
| Ground | 1,3,4,5,6,7,10 Paddle | Connect to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance. |





WIDEBAND

Low Noise Bypass Amplifier

TSS-53LNB+

50Ω 0.5 to 5 GHz

CHARACTERIZATION TEST CIRCUIT

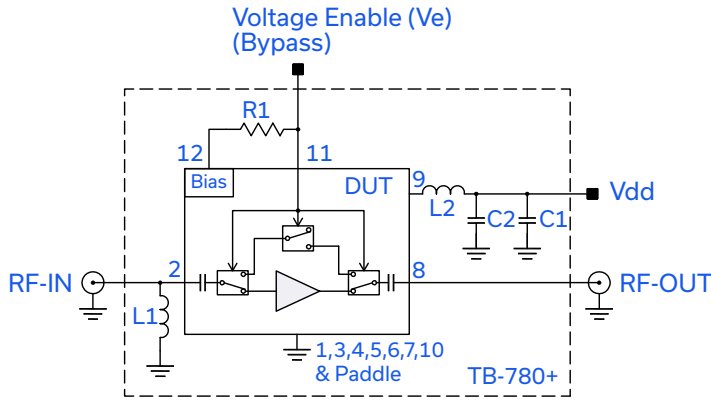


Fig 1. Block diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Characterization test board TB-780+)
Gain, Return loss, Output power at 1dB compression (P1 dB), output IP3 (OIP3) and noise figure measured using Agilent's N5242A PNA-X microwave network analyzer.

Conditions:

1. Gain and Return loss: $P_{IN} = -25\text{dBm}$
2. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
3. Switching Time: $P_{IN} = -25\text{ dBm}$ at 500 MHz. $V_{enable} = 4.5, 5.0, 5.5\text{V}$ at 10 kHz. $V_d = 4.75, 5.0$ and 5.5V .

| Component | Size | Value | Units |
|-----------|------|-------|---------------|
| L1 | 0402 | 47 | nH |
| L2 | 0402 | 56 | nH |
| C1 | 0402 | 0.1 | μF |
| C2 | 0402 | 10 | pF |
| R1 | 0402 | 3.92 | k Ω |

RECOMMENDED APPLICATION CIRCUIT

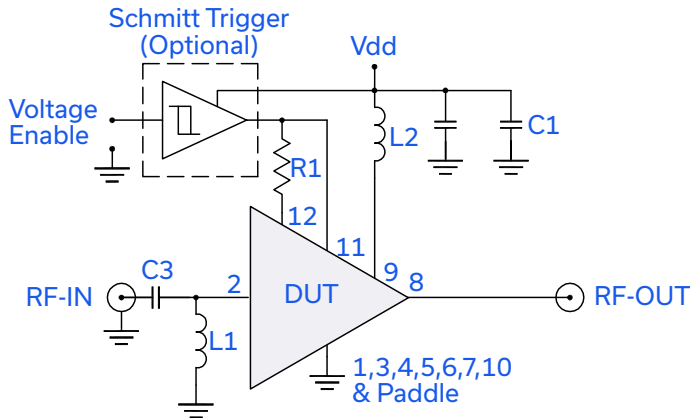


Fig 2. Recommended Application Circuit.

| Component | Size | Value | Units |
|-----------------|--------------------------------------|-------|---------------|
| L1 | 0402 | 47 | nH |
| L2 | 0402 | 56 | nH |
| R1 | 0402 | 3.92 | k Ω |
| C1 | 0402 | 0.1 | μF |
| C2 | 0402 | 10 | pF |
| C3 | 0402 | 1000 | pF |
| Schmitt Trigger | SN74LVC2G17DCKR Texas Instruments | | — |

PRODUCT MARKING



Marking may contain other features or characters for internal lot control





WIDEBAND

Low Noise Bypass Amplifier

TSS-53LNB+

50Ω 0.5 to 5 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

| | |
|------------------------------------------------------|----------------------------------------------------------------------------|
| Performance Data | Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file) |
| Case Style | DQ1225 Plastic package, exposed paddle, terminal finish: matte-tin |
| Tape & Reel Standard quantities available on reel | F66 7" reels with 20, 50, 100, 200, 500, 1K, or 2K devices |
| Suggested Layout for PCB Design | PL-421 |
| Evaluation Board | TB-779-3+ |
| Environmental Ratings | ENV12 |

ESD RATING

Human Body Model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (pass 50V) in accordance with ANSI/ESD STM5.2-1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Typical Performance Data

NOTE: Use PDF Bookmarks to view DATA at required conditions

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = Ve = 5V, Id = 86.38 mA @ Temperature = +25degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | | | (dBm) | (dBm) | (dB) |
| 100.00 | 13.67 | 37.05 | 1.80 | 2.69 | 1.64 | 0.70 | 32.84 | 16.79 | 4.07 |
| 200.00 | 21.29 | 28.94 | 7.82 | 9.09 | 1.17 | 0.79 | 34.87 | 19.51 | 1.59 |
| 300.00 | 22.50 | 27.68 | 13.54 | 12.21 | 1.11 | 0.65 | 36.08 | 20.71 | 1.41 |
| 400.00 | 22.77 | 27.27 | 15.88 | 12.73 | 1.09 | 0.59 | 36.95 | 21.02 | 1.29 |
| 500.00 | 22.84 | 27.06 | 16.16 | 12.75 | 1.08 | 0.56 | 36.72 | 21.31 | 1.29 |
| 600.00 | 22.85 | 26.98 | 16.00 | 12.73 | 1.08 | 0.55 | 37.44 | 21.27 | 1.28 |
| 700.00 | 22.82 | 26.92 | 15.78 | 12.86 | 1.08 | 0.55 | 38.40 | 21.36 | 1.21 |
| 800.00 | 22.78 | 26.85 | 15.67 | 12.99 | 1.08 | 0.55 | 38.17 | 21.45 | 1.17 |
| 900.00 | 22.72 | 26.79 | 15.60 | 13.20 | 1.08 | 0.56 | 37.69 | 21.37 | 1.27 |
| 1000.00 | 22.65 | 26.82 | 15.59 | 13.47 | 1.08 | 0.57 | 36.34 | 21.23 | 1.18 |
| 1200.00 | 22.50 | 26.74 | 15.62 | 14.18 | 1.08 | 0.59 | 38.29 | 21.39 | 1.22 |
| 1400.00 | 22.32 | 26.68 | 15.74 | 15.04 | 1.09 | 0.62 | 36.43 | 21.23 | 1.21 |
| 1600.00 | 22.12 | 26.68 | 15.83 | 16.14 | 1.10 | 0.65 | 37.53 | 21.23 | 1.26 |
| 1800.00 | 21.92 | 26.67 | 15.89 | 17.33 | 1.11 | 0.68 | 36.42 | 20.97 | 1.28 |
| 2000.00 | 21.70 | 26.57 | 15.82 | 18.41 | 1.11 | 0.70 | 35.39 | 20.88 | 1.37 |
| 2200.00 | 21.47 | 26.61 | 15.69 | 18.99 | 1.13 | 0.73 | 35.16 | 21.10 | 1.34 |
| 2400.00 | 21.24 | 26.56 | 15.45 | 18.82 | 1.14 | 0.74 | 35.11 | 20.90 | 1.41 |
| 2600.00 | 20.99 | 26.55 | 15.22 | 18.08 | 1.15 | 0.76 | 34.29 | 20.59 | 1.46 |
| 2800.00 | 20.75 | 26.53 | 14.96 | 16.84 | 1.16 | 0.77 | 34.41 | 20.54 | 1.43 |
| 3000.00 | 20.53 | 26.55 | 14.67 | 15.62 | 1.17 | 0.77 | 33.99 | 20.28 | 1.43 |
| 3200.00 | 20.30 | 26.54 | 14.63 | 14.55 | 1.18 | 0.77 | 33.81 | 20.41 | 1.49 |
| 3400.00 | 20.08 | 26.48 | 14.73 | 13.69 | 1.19 | 0.77 | 34.11 | 20.34 | 1.50 |
| 3600.00 | 19.89 | 26.49 | 15.03 | 12.94 | 1.21 | 0.77 | 33.80 | 20.36 | 1.56 |
| 3800.00 | 19.69 | 26.54 | 15.46 | 12.39 | 1.23 | 0.77 | 34.20 | 20.61 | 1.56 |
| 4000.00 | 19.51 | 26.47 | 16.06 | 11.85 | 1.23 | 0.76 | 34.31 | 20.49 | 1.55 |
| 4200.00 | 19.34 | 26.53 | 17.03 | 11.58 | 1.25 | 0.77 | 33.98 | 20.38 | 1.58 |
| 4400.00 | 19.18 | 26.52 | 18.33 | 11.32 | 1.27 | 0.76 | 33.58 | 20.31 | 1.59 |
| 4800.00 | 18.85 | 26.56 | 19.64 | 11.07 | 1.29 | 0.78 | 33.15 | 19.95 | 1.71 |
| 5000.00 | 18.67 | 26.57 | 18.49 | 10.99 | 1.30 | 0.80 | 32.24 | 19.51 | 1.74 |
| 5200.00 | 18.44 | 26.76 | 16.42 | 11.03 | 1.32 | 0.83 | 32.74 | 19.53 | 1.86 |
| 5400.00 | 18.18 | 26.82 | 14.06 | 11.11 | 1.33 | 0.86 | 31.69 | 18.86 | 2.01 |
| 5600.00 | 17.84 | 27.12 | 11.87 | 11.14 | 1.36 | 0.91 | 31.15 | 18.50 | 2.12 |
| 5800.00 | 17.41 | 27.50 | 9.98 | 11.15 | 1.40 | 0.97 | 31.70 | 18.38 | 2.31 |
| 6000.00 | 16.83 | 28.04 | 8.38 | 11.09 | 1.46 | 1.04 | 31.13 | 18.10 | 2.67 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd =4.75V, Ve=5.0, Id =84.52 mA @ Temperature = +25degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.63 | 36.91 | 1.80 | 2.64 | 1.61 | 0.69 | 31.96 | 16.16 | 4.07 |
| 200.00 | 21.24 | 29.03 | 7.80 | 8.99 | 1.17 | 0.79 | 34.29 | 18.90 | 1.60 |
| 300.00 | 22.45 | 27.60 | 13.48 | 12.09 | 1.11 | 0.65 | 35.07 | 20.15 | 1.42 |
| 400.00 | 22.73 | 27.20 | 15.84 | 12.61 | 1.09 | 0.59 | 36.27 | 20.57 | 1.31 |
| 500.00 | 22.80 | 27.01 | 16.15 | 12.62 | 1.08 | 0.56 | 36.43 | 20.87 | 1.27 |
| 600.00 | 22.81 | 26.91 | 15.99 | 12.62 | 1.08 | 0.55 | 37.18 | 20.83 | 1.25 |
| 700.00 | 22.77 | 26.89 | 15.76 | 12.73 | 1.08 | 0.55 | 38.46 | 20.92 | 1.19 |
| 800.00 | 22.74 | 26.81 | 15.63 | 12.87 | 1.08 | 0.55 | 37.75 | 21.03 | 1.16 |
| 900.00 | 22.68 | 26.78 | 15.54 | 13.08 | 1.08 | 0.56 | 36.60 | 20.94 | 1.22 |
| 1000.00 | 22.61 | 26.73 | 15.51 | 13.36 | 1.08 | 0.57 | 36.07 | 20.81 | 1.19 |
| 1200.00 | 22.45 | 26.74 | 15.50 | 14.06 | 1.09 | 0.60 | 37.53 | 20.95 | 1.22 |
| 1400.00 | 22.28 | 26.67 | 15.59 | 14.91 | 1.09 | 0.62 | 35.96 | 20.81 | 1.22 |
| 1600.00 | 22.07 | 26.63 | 15.65 | 15.98 | 1.10 | 0.65 | 36.13 | 20.82 | 1.26 |
| 1800.00 | 21.86 | 26.66 | 15.68 | 17.13 | 1.11 | 0.68 | 35.89 | 20.56 | 1.25 |
| 2000.00 | 21.64 | 26.59 | 15.59 | 18.16 | 1.12 | 0.71 | 35.06 | 20.49 | 1.36 |
| 2200.00 | 21.41 | 26.56 | 15.48 | 18.71 | 1.13 | 0.73 | 34.72 | 20.71 | 1.33 |
| 2400.00 | 21.18 | 26.56 | 15.23 | 18.57 | 1.14 | 0.75 | 34.66 | 20.52 | 1.41 |
| 2600.00 | 20.93 | 26.53 | 15.04 | 17.85 | 1.15 | 0.76 | 33.98 | 20.20 | 1.47 |
| 2800.00 | 20.70 | 26.51 | 14.83 | 16.65 | 1.16 | 0.77 | 33.90 | 20.17 | 1.43 |
| 3000.00 | 20.47 | 26.50 | 14.59 | 15.46 | 1.17 | 0.78 | 33.86 | 19.91 | 1.40 |
| 3200.00 | 20.24 | 26.47 | 14.56 | 14.43 | 1.18 | 0.77 | 33.44 | 20.03 | 1.49 |
| 3400.00 | 20.02 | 26.44 | 14.69 | 13.56 | 1.19 | 0.77 | 33.97 | 19.96 | 1.50 |
| 3600.00 | 19.83 | 26.41 | 15.04 | 12.84 | 1.20 | 0.77 | 33.64 | 19.99 | 1.53 |
| 3800.00 | 19.62 | 26.44 | 15.50 | 12.31 | 1.22 | 0.77 | 33.98 | 20.22 | 1.56 |
| 4000.00 | 19.45 | 26.49 | 16.12 | 11.77 | 1.24 | 0.77 | 34.04 | 20.09 | 1.55 |
| 4200.00 | 19.27 | 26.49 | 17.06 | 11.47 | 1.25 | 0.77 | 33.47 | 20.01 | 1.57 |
| 4400.00 | 19.11 | 26.49 | 18.35 | 11.22 | 1.27 | 0.77 | 33.62 | 19.94 | 1.61 |
| 4800.00 | 18.78 | 26.46 | 19.37 | 10.95 | 1.28 | 0.78 | 33.01 | 19.60 | 1.68 |
| 5000.00 | 18.59 | 26.61 | 18.14 | 10.88 | 1.30 | 0.80 | 32.11 | 19.20 | 1.73 |
| 5200.00 | 18.36 | 26.71 | 16.07 | 10.90 | 1.32 | 0.83 | 32.42 | 19.20 | 1.84 |
| 5400.00 | 18.09 | 26.87 | 13.78 | 10.97 | 1.34 | 0.87 | 31.65 | 18.58 | 2.00 |
| 5600.00 | 17.74 | 27.11 | 11.65 | 10.99 | 1.36 | 0.92 | 30.85 | 18.16 | 2.10 |
| 5800.00 | 17.31 | 27.50 | 9.82 | 11.00 | 1.40 | 0.98 | 31.57 | 18.06 | 2.33 |
| 6000.00 | 16.73 | 28.06 | 8.27 | 10.93 | 1.47 | 1.04 | 30.73 | 17.77 | 2.66 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Ve=5.0V, Id = 88.2 mA @ Temperature = +25degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.68 | 37.17 | 1.80 | 2.78 | 1.68 | 0.72 | 32.98 | 17.26 | 4.40 |
| 200.00 | 21.30 | 29.08 | 7.83 | 9.30 | 1.18 | 0.80 | 34.78 | 20.02 | 1.60 |
| 300.00 | 22.51 | 27.61 | 13.56 | 12.49 | 1.11 | 0.65 | 35.87 | 21.15 | 1.43 |
| 400.00 | 22.77 | 27.35 | 15.90 | 13.00 | 1.10 | 0.60 | 36.07 | 21.42 | 1.32 |
| 500.00 | 22.84 | 27.09 | 16.17 | 13.00 | 1.09 | 0.57 | 37.22 | 21.70 | 1.30 |
| 600.00 | 22.85 | 27.04 | 16.02 | 12.99 | 1.08 | 0.56 | 37.38 | 21.64 | 1.29 |
| 700.00 | 22.82 | 26.98 | 15.81 | 13.11 | 1.08 | 0.56 | 38.68 | 21.73 | 1.21 |
| 800.00 | 22.79 | 26.94 | 15.71 | 13.23 | 1.08 | 0.56 | 37.89 | 21.81 | 1.18 |
| 900.00 | 22.73 | 26.92 | 15.67 | 13.46 | 1.08 | 0.57 | 37.72 | 21.74 | 1.22 |
| 1000.00 | 22.66 | 26.86 | 15.68 | 13.74 | 1.09 | 0.58 | 36.40 | 21.61 | 1.20 |
| 1200.00 | 22.51 | 26.79 | 15.74 | 14.46 | 1.09 | 0.60 | 38.64 | 21.75 | 1.24 |
| 1400.00 | 22.34 | 26.79 | 15.89 | 15.35 | 1.10 | 0.63 | 36.59 | 21.61 | 1.22 |
| 1600.00 | 22.13 | 26.70 | 16.02 | 16.47 | 1.10 | 0.65 | 37.19 | 21.59 | 1.29 |
| 1800.00 | 21.93 | 26.75 | 16.11 | 17.68 | 1.12 | 0.68 | 36.91 | 21.33 | 1.29 |
| 2000.00 | 21.71 | 26.68 | 16.05 | 18.82 | 1.12 | 0.70 | 35.64 | 21.24 | 1.40 |
| 2200.00 | 21.49 | 26.66 | 15.92 | 19.40 | 1.13 | 0.73 | 35.89 | 21.48 | 1.34 |
| 2400.00 | 21.26 | 26.60 | 15.67 | 19.20 | 1.14 | 0.74 | 35.58 | 21.23 | 1.45 |
| 2600.00 | 21.01 | 26.65 | 15.40 | 18.35 | 1.16 | 0.76 | 34.79 | 20.92 | 1.47 |
| 2800.00 | 20.78 | 26.60 | 15.09 | 17.05 | 1.17 | 0.77 | 34.66 | 20.90 | 1.42 |
| 3000.00 | 20.55 | 26.53 | 14.79 | 15.81 | 1.17 | 0.77 | 34.20 | 20.62 | 1.43 |
| 3200.00 | 20.33 | 26.64 | 14.68 | 14.72 | 1.19 | 0.78 | 33.82 | 20.75 | 1.48 |
| 3400.00 | 20.11 | 26.59 | 14.77 | 13.84 | 1.21 | 0.77 | 34.33 | 20.68 | 1.53 |
| 3600.00 | 19.91 | 26.57 | 15.05 | 13.09 | 1.22 | 0.77 | 34.36 | 20.72 | 1.58 |
| 3800.00 | 19.71 | 26.57 | 15.46 | 12.54 | 1.23 | 0.77 | 34.50 | 20.96 | 1.59 |
| 4000.00 | 19.54 | 26.54 | 16.01 | 12.03 | 1.24 | 0.76 | 34.46 | 20.82 | 1.58 |
| 4200.00 | 19.36 | 26.62 | 17.00 | 11.74 | 1.26 | 0.77 | 33.89 | 20.73 | 1.61 |
| 4400.00 | 19.21 | 26.56 | 18.33 | 11.48 | 1.27 | 0.77 | 33.84 | 20.63 | 1.61 |
| 4800.00 | 18.89 | 26.64 | 19.90 | 11.27 | 1.30 | 0.78 | 33.39 | 20.25 | 1.71 |
| 5000.00 | 18.71 | 26.77 | 18.86 | 11.19 | 1.32 | 0.80 | 32.62 | 19.78 | 1.77 |
| 5200.00 | 18.48 | 26.77 | 16.77 | 11.24 | 1.33 | 0.83 | 33.01 | 19.74 | 1.85 |
| 5400.00 | 18.22 | 26.99 | 14.33 | 11.33 | 1.36 | 0.87 | 32.04 | 19.02 | 2.02 |
| 5600.00 | 17.89 | 27.23 | 12.09 | 11.37 | 1.38 | 0.91 | 31.35 | 18.78 | 2.15 |
| 5800.00 | 17.46 | 27.57 | 10.14 | 11.36 | 1.41 | 0.97 | 32.00 | 18.71 | 2.36 |
| 6000.00 | 16.89 | 28.15 | 8.50 | 11.29 | 1.49 | 1.04 | 31.34 | 18.43 | 2.69 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = Ve = 5V, Id = 88.64 mA @ Temperature = -45degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.19 | 36.68 | 1.65 | 2.30 | 1.49 | 0.62 | 40.69 | 16.82 | 3.58 |
| 200.00 | 21.01 | 28.70 | 8.06 | 7.70 | 1.15 | 0.71 | 39.60 | 19.29 | 1.16 |
| 300.00 | 22.12 | 27.47 | 13.26 | 9.45 | 1.10 | 0.58 | 40.47 | 20.53 | 1.09 |
| 400.00 | 22.31 | 27.13 | 13.47 | 9.34 | 1.09 | 0.52 | 40.36 | 20.97 | 0.98 |
| 500.00 | 22.36 | 26.97 | 12.83 | 9.28 | 1.08 | 0.50 | 42.54 | 21.27 | 1.00 |
| 600.00 | 22.37 | 26.87 | 12.45 | 9.27 | 1.07 | 0.48 | 47.11 | 21.25 | 0.99 |
| 700.00 | 22.36 | 26.83 | 12.27 | 9.37 | 1.07 | 0.49 | 42.88 | 21.36 | 0.92 |
| 800.00 | 22.34 | 26.76 | 12.29 | 9.50 | 1.07 | 0.49 | 47.56 | 21.44 | 0.88 |
| 900.00 | 22.31 | 26.75 | 12.36 | 9.70 | 1.08 | 0.50 | 43.30 | 21.31 | 0.85 |
| 1000.00 | 22.28 | 26.68 | 12.53 | 9.90 | 1.08 | 0.50 | 40.26 | 21.22 | 0.89 |
| 1200.00 | 22.18 | 26.60 | 12.90 | 10.33 | 1.08 | 0.52 | 43.39 | 21.39 | 0.89 |
| 1400.00 | 22.07 | 26.52 | 13.38 | 10.78 | 1.08 | 0.53 | 40.23 | 21.24 | 0.88 |
| 1600.00 | 21.94 | 26.48 | 14.06 | 11.50 | 1.09 | 0.56 | 41.76 | 21.23 | 0.97 |
| 1800.00 | 21.83 | 26.47 | 15.22 | 12.36 | 1.10 | 0.59 | 39.64 | 21.00 | 0.94 |
| 2000.00 | 21.69 | 26.34 | 16.22 | 13.43 | 1.11 | 0.61 | 37.71 | 20.87 | 0.99 |
| 2200.00 | 21.54 | 26.20 | 17.57 | 14.42 | 1.11 | 0.63 | 37.02 | 21.14 | 0.94 |
| 2400.00 | 21.39 | 26.19 | 18.93 | 15.52 | 1.12 | 0.65 | 36.80 | 20.95 | 1.03 |
| 2600.00 | 21.20 | 26.15 | 20.36 | 16.60 | 1.14 | 0.67 | 36.26 | 20.61 | 1.04 |
| 2800.00 | 21.03 | 26.12 | 21.49 | 17.41 | 1.15 | 0.69 | 35.51 | 20.56 | 1.02 |
| 3000.00 | 20.86 | 26.11 | 21.79 | 17.51 | 1.16 | 0.70 | 35.10 | 20.26 | 0.97 |
| 3200.00 | 20.68 | 26.09 | 22.12 | 17.05 | 1.17 | 0.71 | 34.83 | 20.32 | 1.02 |
| 3400.00 | 20.50 | 26.05 | 22.34 | 16.22 | 1.17 | 0.71 | 35.38 | 20.38 | 1.03 |
| 3600.00 | 20.32 | 25.99 | 22.42 | 15.35 | 1.18 | 0.71 | 34.90 | 20.30 | 1.11 |
| 3800.00 | 20.16 | 26.06 | 22.65 | 14.63 | 1.20 | 0.72 | 35.42 | 20.76 | 1.09 |
| 4000.00 | 20.01 | 26.05 | 23.43 | 13.93 | 1.21 | 0.72 | 35.55 | 20.68 | 1.09 |
| 4200.00 | 19.81 | 26.09 | 27.38 | 13.32 | 1.22 | 0.72 | 35.23 | 20.69 | 1.09 |
| 4400.00 | 19.69 | 26.05 | 33.92 | 12.93 | 1.23 | 0.72 | 35.03 | 20.63 | 1.09 |
| 4800.00 | 19.39 | 26.17 | 28.95 | 12.34 | 1.25 | 0.73 | 34.15 | 20.42 | 1.17 |
| 5000.00 | 19.26 | 26.26 | 23.12 | 12.20 | 1.26 | 0.75 | 33.21 | 19.90 | 1.23 |
| 5200.00 | 19.06 | 26.33 | 19.33 | 12.05 | 1.27 | 0.77 | 34.03 | 20.16 | 1.29 |
| 5400.00 | 18.85 | 26.52 | 16.45 | 11.99 | 1.29 | 0.80 | 32.91 | 19.58 | 1.44 |
| 5600.00 | 18.59 | 26.62 | 14.12 | 11.92 | 1.30 | 0.84 | 32.16 | 19.10 | 1.49 |
| 5800.00 | 18.30 | 26.96 | 12.09 | 12.18 | 1.33 | 0.90 | 32.88 | 18.91 | 1.67 |
| 6000.00 | 17.92 | 27.39 | 10.21 | 12.44 | 1.37 | 0.96 | 32.45 | 18.69 | 1.94 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Ve = 5.0V, Id = 86.26 mA @ Temperature = -45degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.14 | 36.86 | 1.66 | 2.27 | 1.51 | 0.62 | 40.39 | 16.24 | 3.60 |
| 200.00 | 20.95 | 28.66 | 8.04 | 7.65 | 1.15 | 0.71 | 38.46 | 18.66 | 1.15 |
| 300.00 | 22.07 | 27.31 | 13.28 | 9.41 | 1.10 | 0.57 | 38.45 | 19.90 | 1.09 |
| 400.00 | 22.26 | 27.11 | 13.54 | 9.30 | 1.09 | 0.52 | 38.43 | 20.44 | 0.99 |
| 500.00 | 22.30 | 26.94 | 12.90 | 9.23 | 1.08 | 0.50 | 40.43 | 20.78 | 1.01 |
| 600.00 | 22.32 | 26.83 | 12.51 | 9.25 | 1.07 | 0.49 | 48.67 | 20.78 | 0.97 |
| 700.00 | 22.30 | 26.74 | 12.33 | 9.33 | 1.07 | 0.48 | 44.44 | 20.89 | 0.92 |
| 800.00 | 22.29 | 26.68 | 12.35 | 9.47 | 1.07 | 0.48 | 44.47 | 20.98 | 0.87 |
| 900.00 | 22.26 | 26.64 | 12.43 | 9.67 | 1.07 | 0.49 | 50.04 | 20.86 | 1.30 |
| 1000.00 | 22.22 | 26.63 | 12.58 | 9.87 | 1.07 | 0.50 | 39.43 | 20.77 | 0.87 |
| 1200.00 | 22.13 | 26.54 | 12.94 | 10.30 | 1.08 | 0.52 | 43.50 | 20.94 | 0.92 |
| 1400.00 | 22.02 | 26.51 | 13.42 | 10.75 | 1.09 | 0.54 | 38.61 | 20.80 | 0.89 |
| 1600.00 | 21.89 | 26.41 | 14.07 | 11.46 | 1.09 | 0.56 | 39.83 | 20.79 | 0.96 |
| 1800.00 | 21.77 | 26.30 | 15.18 | 12.32 | 1.10 | 0.58 | 39.00 | 20.58 | 0.91 |
| 2000.00 | 21.63 | 26.22 | 16.14 | 13.38 | 1.10 | 0.61 | 36.92 | 20.46 | 1.00 |
| 2200.00 | 21.48 | 26.21 | 17.42 | 14.34 | 1.12 | 0.63 | 37.17 | 20.72 | 0.92 |
| 2400.00 | 21.33 | 26.13 | 18.75 | 15.44 | 1.12 | 0.65 | 36.43 | 20.54 | 1.01 |
| 2600.00 | 21.14 | 26.10 | 20.02 | 16.48 | 1.13 | 0.67 | 35.31 | 20.18 | 1.04 |
| 2800.00 | 20.97 | 26.10 | 21.04 | 17.23 | 1.15 | 0.69 | 35.01 | 20.12 | 1.00 |
| 3000.00 | 20.80 | 26.00 | 21.40 | 17.31 | 1.15 | 0.70 | 35.04 | 19.87 | 0.97 |
| 3200.00 | 20.62 | 26.00 | 21.74 | 16.82 | 1.16 | 0.71 | 34.79 | 19.91 | 1.03 |
| 3400.00 | 20.44 | 25.94 | 22.07 | 16.01 | 1.17 | 0.71 | 35.09 | 19.96 | 1.01 |
| 3600.00 | 20.26 | 26.00 | 22.23 | 15.15 | 1.18 | 0.72 | 34.87 | 19.87 | 1.09 |
| 3800.00 | 20.11 | 26.01 | 22.60 | 14.44 | 1.19 | 0.72 | 35.13 | 20.33 | 1.09 |
| 4000.00 | 19.95 | 25.98 | 23.44 | 13.73 | 1.20 | 0.71 | 35.47 | 20.25 | 1.08 |
| 4200.00 | 19.75 | 26.10 | 27.55 | 13.17 | 1.23 | 0.72 | 34.95 | 20.22 | 1.09 |
| 4400.00 | 19.63 | 26.02 | 34.74 | 12.77 | 1.23 | 0.72 | 34.45 | 20.18 | 1.14 |
| 4800.00 | 19.33 | 26.11 | 28.18 | 12.18 | 1.25 | 0.73 | 34.17 | 20.03 | 1.18 |
| 5000.00 | 19.19 | 26.23 | 22.67 | 12.05 | 1.26 | 0.75 | 33.17 | 19.64 | 1.21 |
| 5200.00 | 18.99 | 26.24 | 19.03 | 11.90 | 1.27 | 0.77 | 33.80 | 19.82 | 1.29 |
| 5400.00 | 18.78 | 26.42 | 16.20 | 11.84 | 1.28 | 0.80 | 32.41 | 19.27 | 1.43 |
| 5600.00 | 18.52 | 26.67 | 13.91 | 11.77 | 1.30 | 0.85 | 31.85 | 18.78 | 1.51 |
| 5800.00 | 18.22 | 26.89 | 11.90 | 12.02 | 1.32 | 0.90 | 32.39 | 18.50 | 1.67 |
| 6000.00 | 17.84 | 27.37 | 10.07 | 12.27 | 1.37 | 0.97 | 32.15 | 18.27 | 1.97 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 5.25V, Ve = 5.0V, Id = 90.87 mA @ Temperature = -45degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.22 | 36.82 | 1.66 | 2.38 | 1.54 | 0.64 | 40.83 | 17.35 | 3.62 |
| 200.00 | 21.03 | 28.83 | 8.05 | 7.84 | 1.16 | 0.73 | 40.94 | 19.84 | 1.17 |
| 300.00 | 22.15 | 27.56 | 13.24 | 9.62 | 1.11 | 0.59 | 44.19 | 21.04 | 1.12 |
| 400.00 | 22.33 | 27.19 | 13.44 | 9.49 | 1.09 | 0.53 | 41.32 | 21.43 | 0.99 |
| 500.00 | 22.38 | 27.05 | 12.78 | 9.42 | 1.08 | 0.51 | 42.90 | 21.71 | 1.03 |
| 600.00 | 22.39 | 26.95 | 12.41 | 9.43 | 1.08 | 0.50 | 47.09 | 21.67 | 0.99 |
| 700.00 | 22.37 | 26.92 | 12.23 | 9.53 | 1.08 | 0.50 | 40.39 | 21.76 | 0.93 |
| 800.00 | 22.36 | 26.89 | 12.26 | 9.65 | 1.08 | 0.50 | 45.09 | 21.86 | 0.89 |
| 900.00 | 22.33 | 26.81 | 12.34 | 9.85 | 1.08 | 0.50 | 45.66 | 21.72 | 5.51 |
| 1000.00 | 22.30 | 26.73 | 12.50 | 10.07 | 1.08 | 0.51 | 41.81 | 21.64 | 0.93 |
| 1200.00 | 22.20 | 26.71 | 12.86 | 10.48 | 1.09 | 0.53 | 42.34 | 21.80 | 0.91 |
| 1400.00 | 22.09 | 26.65 | 13.39 | 10.94 | 1.09 | 0.55 | 40.79 | 21.65 | 0.90 |
| 1600.00 | 21.96 | 26.54 | 14.10 | 11.65 | 1.10 | 0.57 | 42.71 | 21.64 | 0.98 |
| 1800.00 | 21.85 | 26.52 | 15.27 | 12.54 | 1.11 | 0.60 | 41.64 | 21.39 | 0.95 |
| 2000.00 | 21.72 | 26.44 | 16.30 | 13.62 | 1.12 | 0.62 | 37.82 | 21.26 | 1.01 |
| 2200.00 | 21.56 | 26.35 | 17.69 | 14.61 | 1.12 | 0.64 | 37.80 | 21.54 | 0.96 |
| 2400.00 | 21.41 | 26.24 | 19.16 | 15.76 | 1.13 | 0.65 | 36.87 | 21.34 | 1.01 |
| 2600.00 | 21.22 | 26.27 | 20.63 | 16.86 | 1.14 | 0.68 | 36.37 | 20.98 | 1.06 |
| 2800.00 | 21.06 | 26.19 | 21.88 | 17.70 | 1.15 | 0.69 | 36.12 | 20.94 | 1.04 |
| 3000.00 | 20.89 | 26.16 | 22.14 | 17.82 | 1.16 | 0.70 | 35.51 | 20.64 | 0.99 |
| 3200.00 | 20.70 | 26.12 | 22.39 | 17.32 | 1.17 | 0.71 | 35.26 | 20.72 | 1.01 |
| 3400.00 | 20.52 | 26.08 | 22.55 | 16.47 | 1.18 | 0.71 | 35.56 | 20.78 | 1.04 |
| 3600.00 | 20.35 | 26.16 | 22.45 | 15.57 | 1.19 | 0.72 | 35.26 | 20.68 | 1.11 |
| 3800.00 | 20.19 | 26.14 | 22.61 | 14.83 | 1.20 | 0.72 | 35.61 | 21.17 | 1.10 |
| 4000.00 | 20.03 | 26.11 | 23.25 | 14.13 | 1.21 | 0.72 | 35.66 | 21.11 | 1.09 |
| 4200.00 | 19.83 | 26.16 | 27.01 | 13.52 | 1.23 | 0.72 | 35.43 | 21.04 | 1.13 |
| 4400.00 | 19.72 | 26.18 | 32.75 | 13.13 | 1.24 | 0.72 | 34.82 | 20.89 | 1.12 |
| 4800.00 | 19.42 | 26.23 | 29.90 | 12.54 | 1.26 | 0.74 | 34.52 | 20.45 | 1.19 |
| 5000.00 | 19.28 | 26.32 | 23.64 | 12.41 | 1.27 | 0.75 | 33.45 | 19.92 | 1.22 |
| 5200.00 | 19.09 | 26.40 | 19.75 | 12.26 | 1.28 | 0.77 | 34.06 | 20.19 | 1.29 |
| 5400.00 | 18.89 | 26.54 | 16.76 | 12.20 | 1.30 | 0.80 | 33.04 | 19.58 | 1.45 |
| 5600.00 | 18.63 | 26.71 | 14.36 | 12.14 | 1.31 | 0.84 | 32.27 | 19.11 | 1.54 |
| 5800.00 | 18.34 | 27.05 | 12.28 | 12.41 | 1.34 | 0.90 | 32.87 | 19.07 | 1.68 |
| 6000.00 | 17.97 | 27.40 | 10.35 | 12.68 | 1.38 | 0.96 | 32.70 | 18.77 | 1.97 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = Ve = 5V, Id = 84.93 mA @ Temperature = +85degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.82 | 36.92 | 1.84 | 2.96 | 1.67 | 0.75 | 31.13 | 16.51 | 4.69 |
| 200.00 | 21.35 | 29.12 | 7.44 | 9.99 | 1.18 | 0.83 | 33.40 | 19.42 | 1.92 |
| 300.00 | 22.62 | 27.71 | 12.97 | 14.46 | 1.11 | 0.69 | 34.09 | 20.47 | 1.60 |
| 400.00 | 22.92 | 27.23 | 15.86 | 15.70 | 1.09 | 0.62 | 35.24 | 20.76 | 1.47 |
| 500.00 | 23.00 | 27.16 | 16.87 | 16.03 | 1.09 | 0.60 | 35.50 | 21.06 | 1.46 |
| 600.00 | 23.01 | 26.97 | 17.08 | 16.06 | 1.08 | 0.58 | 35.87 | 21.02 | 1.42 |
| 700.00 | 22.97 | 26.95 | 16.95 | 16.26 | 1.08 | 0.59 | 36.29 | 21.09 | 1.37 |
| 800.00 | 22.92 | 26.89 | 16.82 | 16.57 | 1.08 | 0.59 | 36.06 | 21.20 | 1.32 |
| 900.00 | 22.85 | 26.87 | 16.57 | 17.04 | 1.08 | 0.60 | 35.87 | 21.12 | 1.36 |
| 1000.00 | 22.77 | 26.80 | 16.33 | 17.58 | 1.08 | 0.61 | 35.17 | 20.99 | 1.37 |
| 1200.00 | 22.57 | 26.77 | 15.83 | 18.75 | 1.08 | 0.64 | 36.48 | 21.14 | 1.38 |
| 1400.00 | 22.36 | 26.78 | 15.26 | 20.01 | 1.09 | 0.67 | 35.34 | 20.98 | 1.38 |
| 1600.00 | 22.09 | 26.77 | 14.74 | 21.09 | 1.10 | 0.70 | 35.23 | 21.01 | 1.47 |
| 1800.00 | 21.85 | 26.82 | 14.09 | 21.59 | 1.11 | 0.73 | 35.11 | 20.75 | 1.48 |
| 2000.00 | 21.58 | 26.78 | 13.68 | 21.08 | 1.12 | 0.75 | 34.44 | 20.69 | 1.60 |
| 2200.00 | 21.30 | 26.75 | 13.19 | 19.70 | 1.13 | 0.77 | 34.30 | 20.84 | 1.57 |
| 2400.00 | 21.03 | 26.73 | 12.77 | 18.12 | 1.14 | 0.79 | 33.90 | 20.66 | 1.65 |
| 2600.00 | 20.73 | 26.75 | 12.49 | 16.68 | 1.15 | 0.80 | 33.72 | 20.34 | 1.69 |
| 2800.00 | 20.46 | 26.72 | 12.17 | 15.26 | 1.16 | 0.81 | 33.62 | 20.28 | 1.65 |
| 3000.00 | 20.20 | 26.75 | 11.93 | 14.06 | 1.18 | 0.81 | 33.51 | 20.05 | 1.63 |
| 3200.00 | 19.96 | 26.84 | 11.88 | 13.09 | 1.20 | 0.82 | 33.20 | 20.13 | 1.79 |
| 3400.00 | 19.72 | 26.67 | 11.98 | 12.37 | 1.20 | 0.81 | 33.33 | 20.07 | 1.81 |
| 3600.00 | 19.51 | 26.70 | 12.24 | 11.75 | 1.22 | 0.80 | 33.16 | 20.04 | 1.85 |
| 3800.00 | 19.32 | 26.69 | 12.58 | 11.29 | 1.23 | 0.80 | 33.24 | 20.10 | 1.88 |
| 4000.00 | 19.11 | 26.71 | 13.07 | 10.89 | 1.25 | 0.79 | 33.58 | 19.96 | 1.86 |
| 4200.00 | 18.93 | 26.73 | 13.85 | 10.71 | 1.27 | 0.80 | 33.20 | 19.76 | 1.90 |
| 4400.00 | 18.77 | 26.65 | 14.73 | 10.54 | 1.28 | 0.79 | 32.87 | 19.65 | 1.90 |
| 4800.00 | 18.40 | 26.69 | 15.60 | 10.31 | 1.31 | 0.81 | 32.10 | 18.99 | 1.98 |
| 5000.00 | 18.19 | 26.79 | 15.10 | 10.24 | 1.32 | 0.83 | 31.16 | 18.50 | 2.07 |
| 5200.00 | 17.91 | 26.91 | 13.74 | 10.23 | 1.34 | 0.86 | 31.36 | 18.29 | 2.19 |
| 5400.00 | 17.57 | 27.09 | 11.98 | 10.24 | 1.36 | 0.90 | 30.53 | 17.74 | 2.39 |
| 5600.00 | 17.15 | 27.44 | 10.30 | 10.14 | 1.40 | 0.95 | 29.65 | 17.28 | 2.52 |
| 5800.00 | 16.62 | 27.87 | 8.75 | 10.00 | 1.45 | 1.01 | 30.03 | 17.19 | 2.78 |
| 6000.00 | 15.93 | 28.50 | 7.43 | 9.83 | 1.55 | 1.06 | 29.14 | 16.77 | 3.20 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)

Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)

TEST CONDITIONS: Vd = 4.75V, Ve =5.0V, Id = 83.15 mA @ Temperature = +85degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.79 | 37.05 | 1.84 | 2.91 | 1.69 | 0.75 | 30.60 | 16.00 | 4.77 |
| 200.00 | 21.30 | 29.10 | 7.42 | 9.89 | 1.18 | 0.83 | 33.10 | 18.89 | 1.90 |
| 300.00 | 22.58 | 27.60 | 12.90 | 14.28 | 1.11 | 0.68 | 34.05 | 20.01 | 1.61 |
| 400.00 | 22.88 | 27.24 | 15.78 | 15.52 | 1.09 | 0.62 | 34.76 | 20.36 | 1.46 |
| 500.00 | 22.96 | 27.05 | 16.77 | 15.86 | 1.08 | 0.60 | 34.69 | 20.66 | 1.43 |
| 600.00 | 22.97 | 26.95 | 16.96 | 15.92 | 1.08 | 0.59 | 35.31 | 20.62 | 1.39 |
| 700.00 | 22.93 | 26.90 | 16.86 | 16.12 | 1.08 | 0.59 | 36.01 | 20.69 | 1.35 |
| 800.00 | 22.88 | 26.83 | 16.69 | 16.41 | 1.08 | 0.59 | 35.79 | 20.81 | 1.33 |
| 900.00 | 22.81 | 26.75 | 16.40 | 16.87 | 1.07 | 0.60 | 35.03 | 20.74 | 1.37 |
| 1000.00 | 22.73 | 26.77 | 16.14 | 17.40 | 1.08 | 0.61 | 34.56 | 20.59 | 1.37 |
| 1200.00 | 22.52 | 26.79 | 15.63 | 18.54 | 1.09 | 0.64 | 36.14 | 20.74 | 1.37 |
| 1400.00 | 22.31 | 26.75 | 15.07 | 19.75 | 1.09 | 0.67 | 34.85 | 20.62 | 1.38 |
| 1600.00 | 22.04 | 26.68 | 14.53 | 20.80 | 1.10 | 0.70 | 34.84 | 20.61 | 1.47 |
| 1800.00 | 21.79 | 26.78 | 13.91 | 21.25 | 1.11 | 0.73 | 35.13 | 20.39 | 1.49 |
| 2000.00 | 21.52 | 26.67 | 13.50 | 20.75 | 1.11 | 0.75 | 34.18 | 20.29 | 1.60 |
| 2200.00 | 21.24 | 26.71 | 13.04 | 19.44 | 1.13 | 0.78 | 33.99 | 20.46 | 1.56 |
| 2400.00 | 20.97 | 26.69 | 12.64 | 17.96 | 1.14 | 0.79 | 34.08 | 20.28 | 1.68 |
| 2600.00 | 20.67 | 26.79 | 12.37 | 16.54 | 1.16 | 0.81 | 33.22 | 19.98 | 1.70 |
| 2800.00 | 20.40 | 26.68 | 12.10 | 15.14 | 1.16 | 0.81 | 33.26 | 19.92 | 1.66 |
| 3000.00 | 20.14 | 26.75 | 11.86 | 13.96 | 1.18 | 0.82 | 33.02 | 19.71 | 1.62 |
| 3200.00 | 19.90 | 26.76 | 11.84 | 13.01 | 1.19 | 0.82 | 32.57 | 19.78 | 1.76 |
| 3400.00 | 19.65 | 26.69 | 11.97 | 12.27 | 1.20 | 0.81 | 33.22 | 19.72 | 1.80 |
| 3600.00 | 19.45 | 26.65 | 12.24 | 11.67 | 1.21 | 0.80 | 32.83 | 19.67 | 1.84 |
| 3800.00 | 19.25 | 26.73 | 12.61 | 11.20 | 1.24 | 0.80 | 33.26 | 19.76 | 1.85 |
| 4000.00 | 19.04 | 26.70 | 13.12 | 10.80 | 1.25 | 0.80 | 33.52 | 19.63 | 1.87 |
| 4200.00 | 18.86 | 26.58 | 13.89 | 10.62 | 1.26 | 0.79 | 33.04 | 19.44 | 1.88 |
| 4400.00 | 18.70 | 26.62 | 14.78 | 10.43 | 1.28 | 0.79 | 32.99 | 19.33 | 1.92 |
| 4800.00 | 18.32 | 26.61 | 15.52 | 10.19 | 1.30 | 0.81 | 31.77 | 18.71 | 1.99 |
| 5000.00 | 18.10 | 26.73 | 14.94 | 10.14 | 1.32 | 0.83 | 30.97 | 18.19 | 2.07 |
| 5200.00 | 17.82 | 26.82 | 13.55 | 10.11 | 1.33 | 0.86 | 31.14 | 18.07 | 2.20 |
| 5400.00 | 17.47 | 27.05 | 11.81 | 10.09 | 1.36 | 0.90 | 30.54 | 17.54 | 2.38 |
| 5600.00 | 17.04 | 27.40 | 10.15 | 10.00 | 1.40 | 0.95 | 29.57 | 17.08 | 2.52 |
| 5800.00 | 16.51 | 27.80 | 8.64 | 9.88 | 1.44 | 1.01 | 29.87 | 16.89 | 2.77 |
| 6000.00 | 15.82 | 28.39 | 7.35 | 9.70 | 1.53 | 1.06 | 29.03 | 16.50 | 3.20 |

Typical Performance Data

Definitions:

Input Return Loss = -S11 (dB)

Gain(Power Gain) = S21 (dB)









Reverse Isolation = -S12 (dB)

Output Return Loss = -S22 (dB)








TEST CONDITIONS: Vd = 5.25V, Ve = 5.0V, Id = 86.69 mA @ Temperature = +85degC

| FREQ | Gain | Isolation | Input Return Loss | Output Return Loss | Stability | | IP-3 Output | 1dB Comp. Output | Noise Figure |
|---------|-------|-----------|-------------------|--------------------|-----------|---------|-------------|------------------|--------------|
| | | | | | K | Measure | | | |
| (MHz) | (dB) | (dB) | (dB) | (dB) | K | Measure | (dBm) | (dBm) | (dB) |
| 100.00 | 13.82 | 37.21 | 1.83 | 3.06 | 1.74 | 0.78 | 31.27 | 16.94 | 4.58 |
| 200.00 | 21.35 | 29.14 | 7.45 | 10.23 | 1.19 | 0.84 | 33.27 | 19.84 | 1.90 |
| 300.00 | 22.62 | 27.67 | 13.00 | 14.79 | 1.11 | 0.69 | 34.68 | 20.85 | 1.63 |
| 400.00 | 22.92 | 27.26 | 15.95 | 16.06 | 1.09 | 0.62 | 35.51 | 21.12 | 1.50 |
| 500.00 | 23.00 | 27.21 | 16.91 | 16.38 | 1.09 | 0.61 | 35.14 | 21.39 | 1.46 |
| 600.00 | 23.01 | 27.11 | 17.14 | 16.42 | 1.09 | 0.60 | 36.35 | 21.35 | 1.43 |
| 700.00 | 22.97 | 27.03 | 17.08 | 16.60 | 1.08 | 0.60 | 36.12 | 21.41 | 1.37 |
| 800.00 | 22.92 | 26.97 | 16.93 | 16.92 | 1.08 | 0.60 | 36.36 | 21.53 | 1.33 |
| 900.00 | 22.85 | 26.89 | 16.68 | 17.39 | 1.08 | 0.60 | 35.78 | 21.48 | 1.37 |
| 1000.00 | 22.77 | 26.90 | 16.47 | 17.97 | 1.09 | 0.62 | 35.10 | 21.32 | 1.39 |
| 1200.00 | 22.58 | 26.91 | 16.01 | 19.14 | 1.09 | 0.65 | 36.37 | 21.45 | 1.39 |
| 1400.00 | 22.37 | 26.81 | 15.48 | 20.47 | 1.10 | 0.67 | 35.33 | 21.30 | 1.39 |
| 1600.00 | 22.11 | 26.84 | 14.93 | 21.59 | 1.11 | 0.70 | 35.70 | 21.31 | 1.49 |
| 1800.00 | 21.86 | 26.87 | 14.30 | 22.10 | 1.12 | 0.73 | 35.76 | 21.09 | 1.51 |
| 2000.00 | 21.60 | 26.81 | 13.87 | 21.52 | 1.12 | 0.75 | 34.52 | 20.99 | 1.62 |
| 2200.00 | 21.33 | 26.82 | 13.35 | 19.97 | 1.14 | 0.77 | 34.28 | 21.14 | 1.59 |
| 2400.00 | 21.05 | 26.77 | 12.92 | 18.35 | 1.14 | 0.79 | 34.34 | 20.97 | 1.66 |
| 2600.00 | 20.75 | 26.87 | 12.61 | 16.86 | 1.17 | 0.81 | 33.93 | 20.65 | 1.71 |
| 2800.00 | 20.49 | 26.78 | 12.27 | 15.41 | 1.17 | 0.81 | 33.92 | 20.58 | 1.70 |
| 3000.00 | 20.23 | 26.83 | 11.99 | 14.21 | 1.19 | 0.82 | 33.80 | 20.38 | 1.67 |
| 3200.00 | 19.99 | 26.85 | 11.92 | 13.22 | 1.20 | 0.81 | 33.15 | 20.46 | 1.77 |
| 3400.00 | 19.75 | 26.79 | 12.02 | 12.50 | 1.21 | 0.81 | 33.52 | 20.40 | 1.83 |
| 3600.00 | 19.54 | 26.79 | 12.24 | 11.89 | 1.23 | 0.80 | 33.35 | 20.34 | 1.87 |
| 3800.00 | 19.35 | 26.76 | 12.59 | 11.41 | 1.24 | 0.80 | 33.70 | 20.40 | 1.88 |
| 4000.00 | 19.14 | 26.69 | 13.05 | 11.03 | 1.25 | 0.79 | 33.69 | 20.21 | 1.90 |
| 4200.00 | 18.96 | 26.75 | 13.84 | 10.87 | 1.28 | 0.80 | 33.42 | 20.05 | 1.92 |
| 4400.00 | 18.80 | 26.73 | 14.74 | 10.70 | 1.29 | 0.79 | 33.03 | 19.87 | 1.93 |
| 4800.00 | 18.44 | 26.73 | 15.70 | 10.49 | 1.32 | 0.81 | 32.08 | 19.23 | 2.03 |
| 5000.00 | 18.23 | 26.82 | 15.27 | 10.43 | 1.33 | 0.83 | 31.16 | 18.69 | 2.09 |
| 5200.00 | 17.96 | 26.96 | 13.94 | 10.43 | 1.35 | 0.86 | 31.20 | 18.39 | 2.20 |
| 5400.00 | 17.62 | 27.16 | 12.16 | 10.44 | 1.38 | 0.90 | 30.54 | 17.83 | 2.40 |
| 5600.00 | 17.20 | 27.52 | 10.45 | 10.34 | 1.42 | 0.95 | 29.73 | 17.42 | 2.53 |
| 5800.00 | 16.67 | 27.91 | 8.85 | 10.21 | 1.47 | 1.00 | 30.10 | 17.37 | 2.77 |
| 6000.00 | 15.99 | 28.52 | 7.51 | 10.03 | 1.56 | 1.06 | 29.10 | 16.97 | 3.19 |


Typical Performance Curves

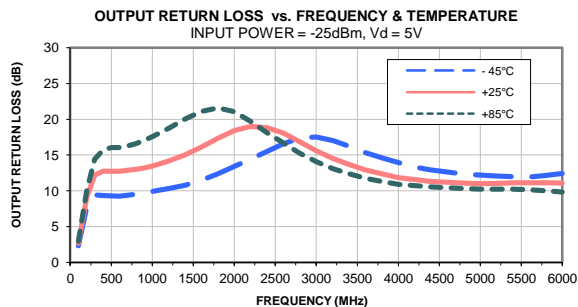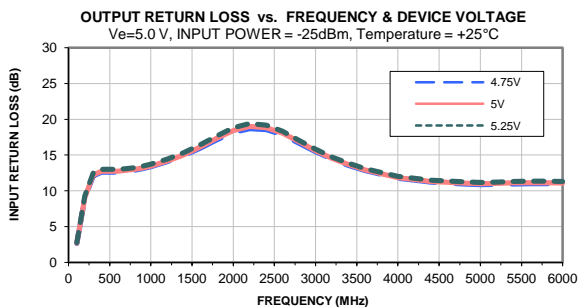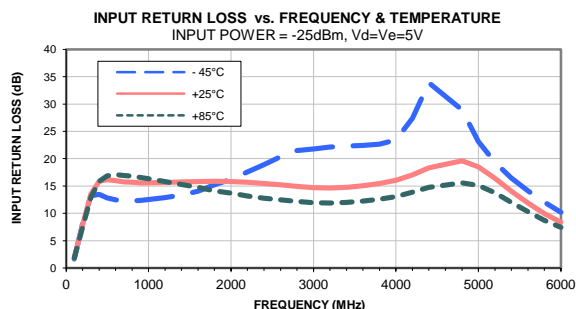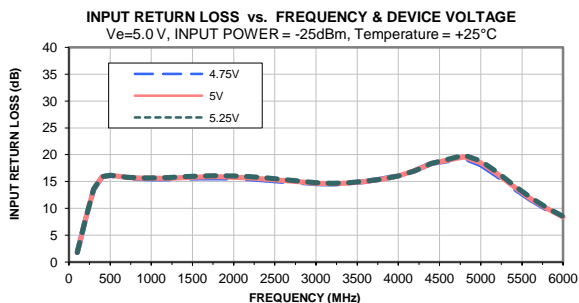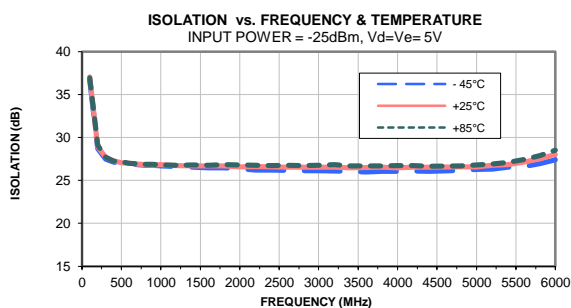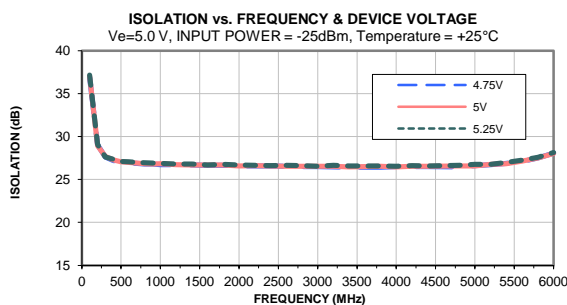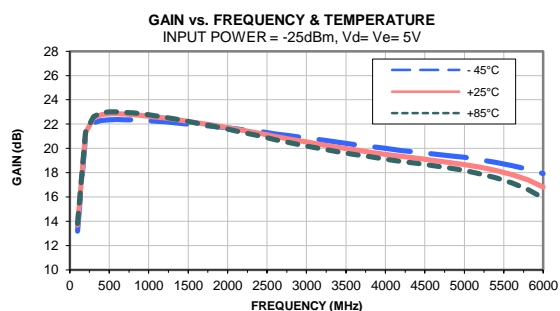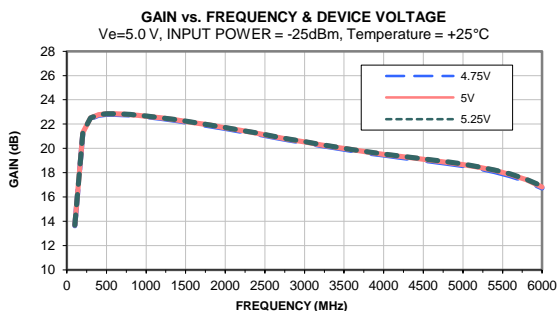


Typical Performance Curves

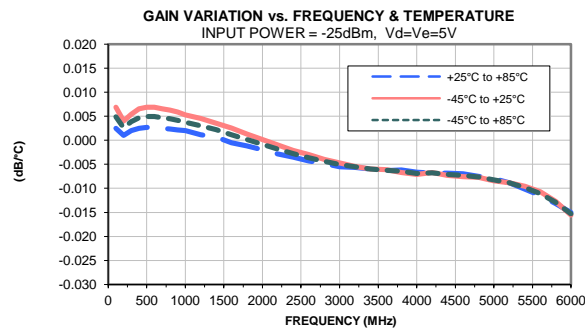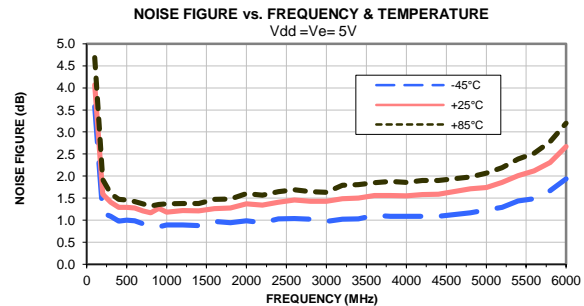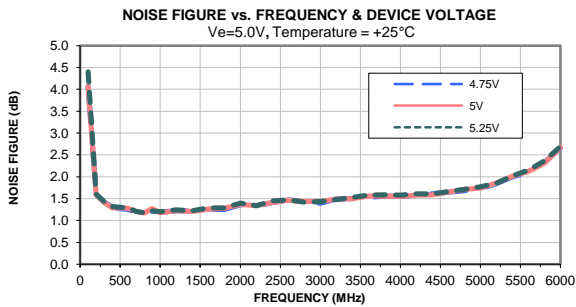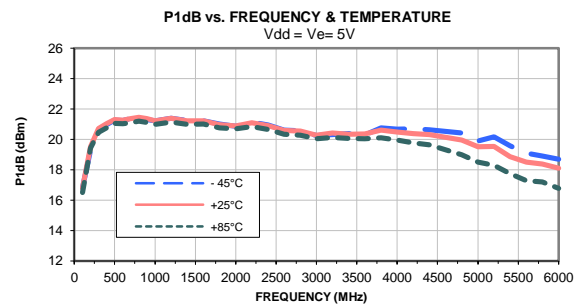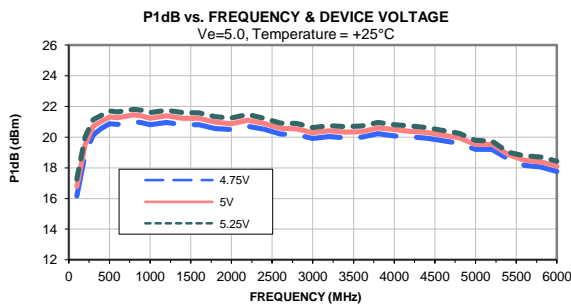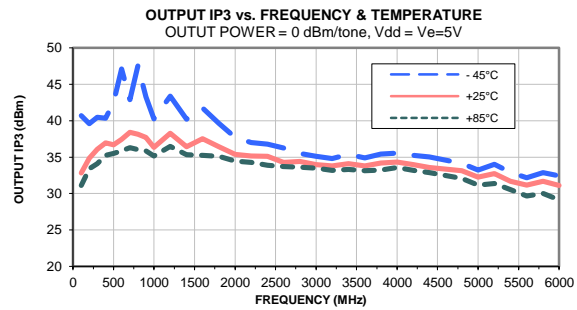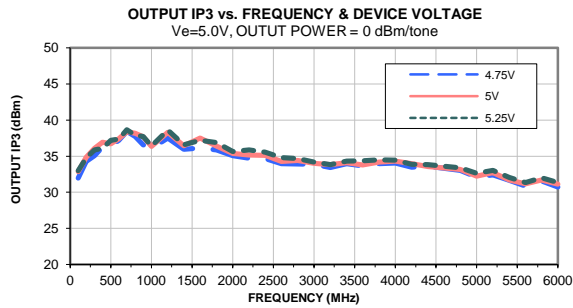

Outline Dimensions

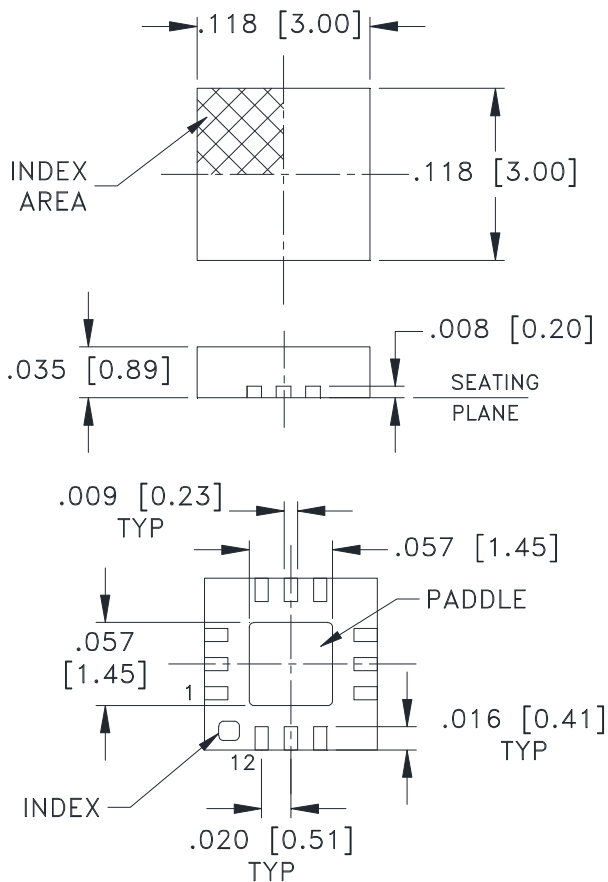

PCB Land Pattern

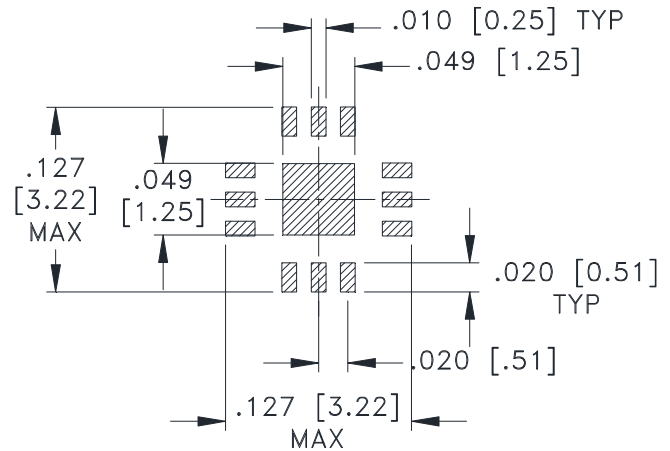

SUGGESTED LAYOUT,
TOLERANCE TO BE WITHIN $\pm .002$

Weight: .02 Grams

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .01$; 3 Pl. $\pm .004$

Notes:

1. Case material: Plastic.
2. Termination finish:
 - For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier or Matte-Tin. All models, (+) suffix. See Data sheet.
 - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.




Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Tape & Reel Packaging TR-F66

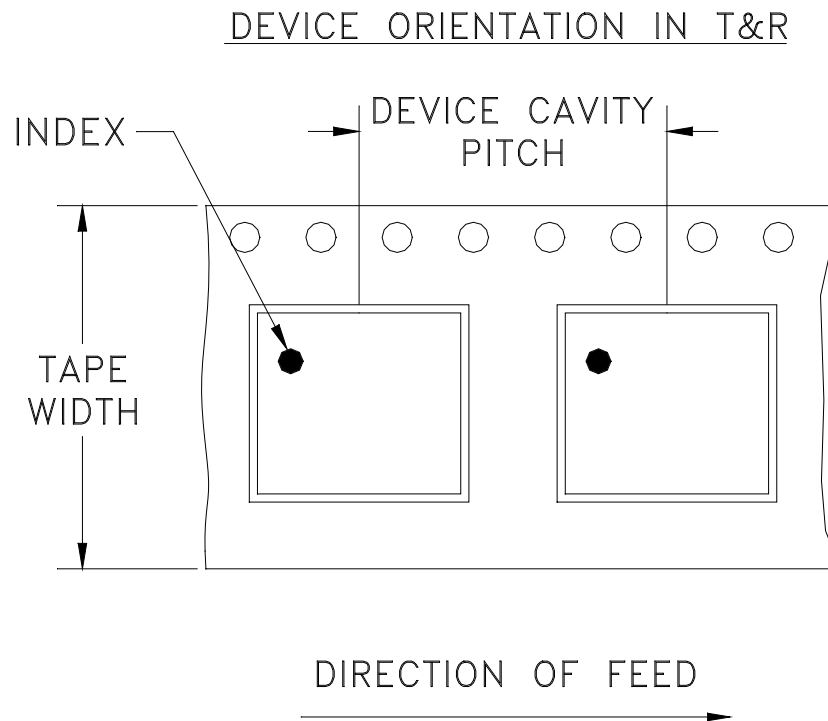

| Tape Width, mm | Device Cavity Pitch, mm | Reel Size, inches | Devices per Reel see note | |
|----------------|-------------------------|-------------------|------------------------------|------------------|
| 8 | 4 | 7 | Small quantity standard | 20 |
| | | | | 50 |
| | | | | 100 |
| | | | | 200 |
| | | | | 500 |
| | | 7 | Standard | 1000, 2000, 3000 |

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits®


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-------------|----------|-----|------|
| OR | M146226 | NEW RELEASE | 05/05/14 | ITG | SK |
| | | | | | |
| | | | | | |


SUGGESTED MOUNTING CONFIGURATION
FOR DQ1225 CASE STYLE, "12AM01" PIN CODE

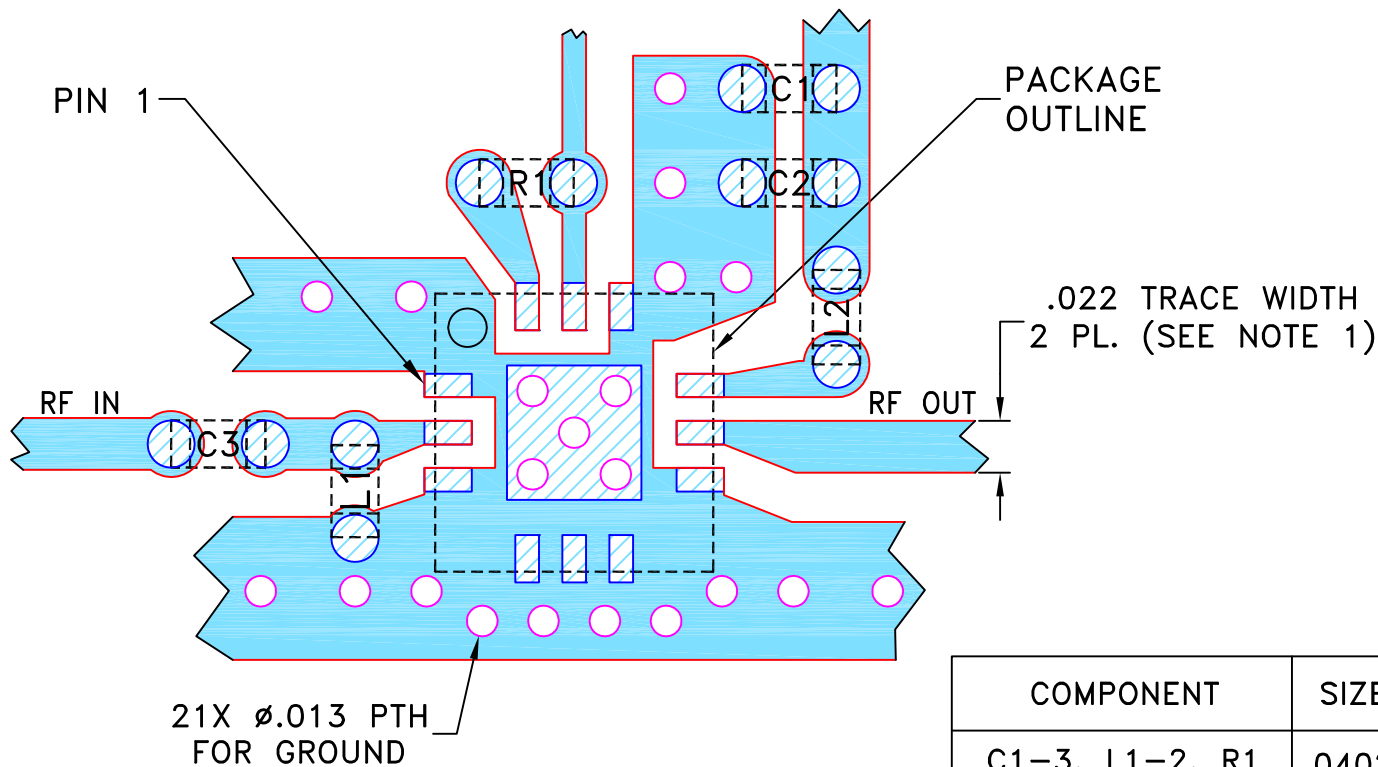

| COMPONENT | SIZE |
|----------------|------|
| C1-3, L1-2, R1 | 0402 |

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-779+.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.


| UNLESS OTHERWISE SPECIFIED | INITIALS | | DATE |
|----------------------------|----------|-----|----------|
| DIMENSIONS ARE IN INCHES | DRAWN | ITG | 04/28/14 |
| TOLERANCES ON: | CHECKED | IL | 04/30/14 |
| 2 PL DECIMALS ± | APPROVED | SK | 05/05/14 |
| 3 PL DECIMALS ± .005 | | | |
| ANGLES ± | | | |
| FRACTIONS ± | | | |



Mini-Circuits® 13 Neptune Avenue
 Brooklyn NY 11235



PL, 12AM01, DQ1225, TB-779+

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.



| | | | |
|------------------|---------------------|--------------------------|------------|
| SIZE A | CODE IDENT 15542 | DRAWING NO: 98-PL-421 | REV: OR |
| FILE: 98PL421 | SCALE: 12:1 | SHEET: 1 OF 1 | |

Evaluation Board and Circuit

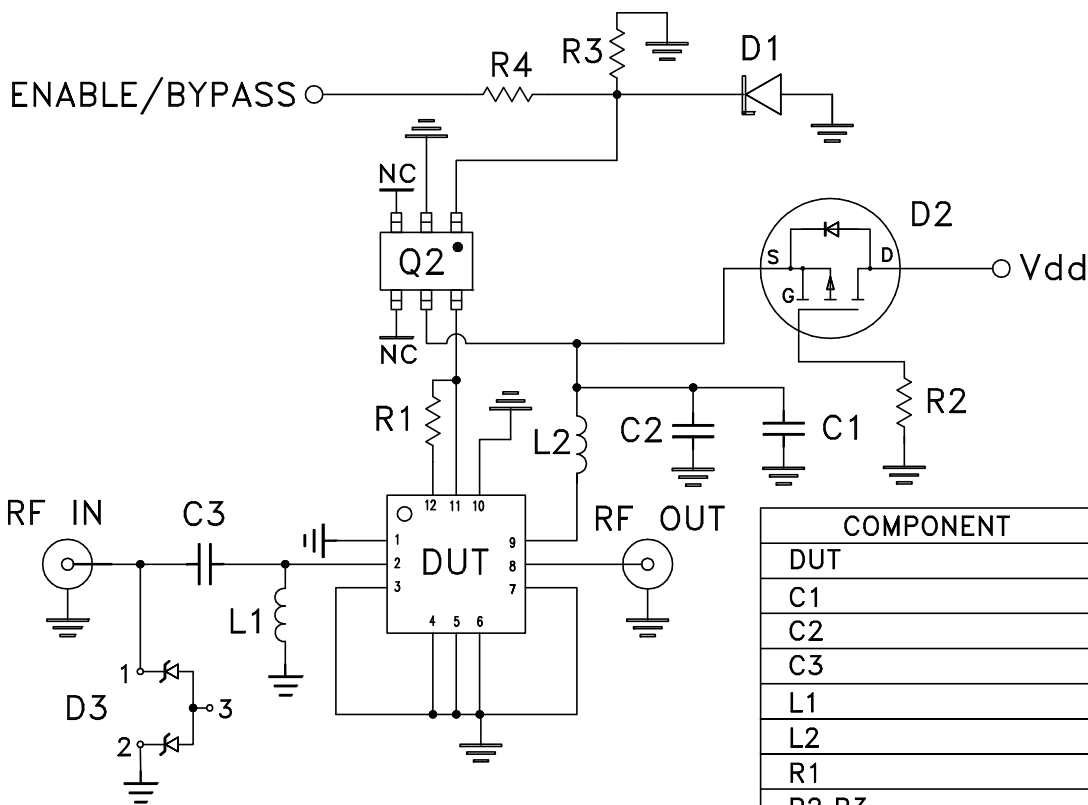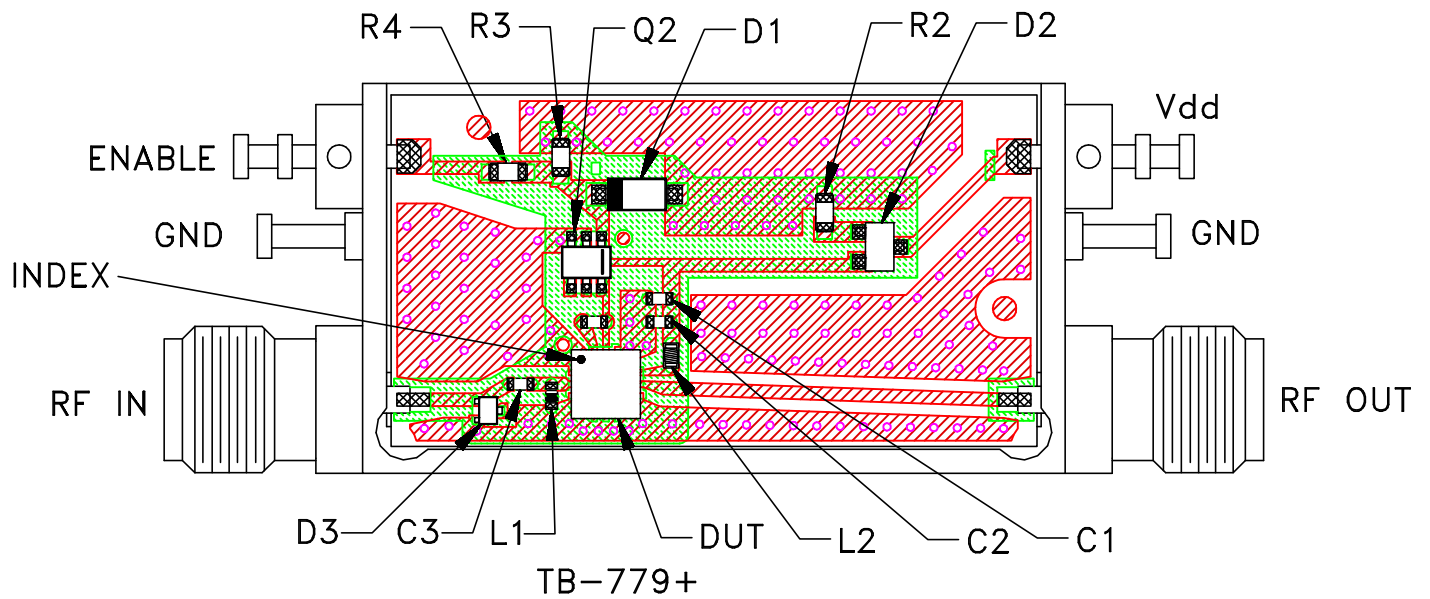


Schematic Diagram

| COMPONENT | | VALUE | SIZE |
|-----------|------------------|-----------------|------|
| DUT | | TSS-53LNB+ | |
| C1 | | .1 uF | 0402 |
| C2 | | 10 pF | |
| C3 | | .001 uF | |
| L1 | | 47 nH | |
| L2 | | 56 nH | |
| R1 | | 3.92 kOhm | 0603 |
| R2,R3 | | 10 kOhm | |
| R4 | | 1 kOhm | |
| D1 | MCL | B40-28-5230B+ | |
| | ON SEMI | MMSZ5230BT1G | |
| D2 | MCL | B43-4101PT1+ | |
| | ON SEMI | NTS4101PT1G | |
| D3 | MCL | B40-ESD7L5+ | |
| | ON SEMI | ESD7L5.0DT5G | |
| Q2 | MCL | B49-SN74-17+ | |
| | TEXAS INSTRUMENT | SN74LVC2G17DCKR | |

Notes:

- 50 Ohm SMA Female connectors.
- PCB Material: R04350 or equivalent, Dielectric Constant=3.5, Thickness=.010 inch.



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| Operating Temperature | -40° to 85° C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -65° to 150° C Ambient Environment | Individual Model Data Sheet |
| Autoclave | 15 psig, 100% RH, 121°C, 96 hours | JESD22-A102-C, Condition C |
| Temperature Cycling | -65° to 150°C, 100 cycles | JESD22-A104 |
| Temperature Humidity | 85°C/ 85% RH, 168 hours | JESD22-113 |
| Solder Reflow Heat | Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak | J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1 |
| Moisture Sensitivity: Level 1 | Bake at 125°C for 24 hours Soak at 85°C/85% RH for 168 hours, Reflow 3 cycles at 240°C peak (Non-RoHS) or 260°C (RoHS) | J-STD-020 |
| Solderability | 10X magnification, 95% coverage | JESD22-B102, Method 1: Dip and Look Test |
| Mechanical Shock | 50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes | MIL-STD-202, Method 213, Condition A |
| Vibration (High Frequency) | 20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36) | MIL-STD-202, Method 204, Condition D |