

# Coaxial Low Pass Filter

## VLFG-630+

50Ω DC to 630 MHz



*Generic photo used for illustration purposes only*  
CASE STYLE: FF704

### The Big Deal

- Good power handling, 3.5 W
- Temperature stable
- Rugged unibody construction
- Good rejection, 46 dB typical

### Product Overview

VLFG-630+ is a 50Ω low pass filter built in rugged unibody construction. Covering DC-630 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-630+ offer low insertion loss, and good power handling capability. It handles up to 3.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

### Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
3.5 W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Pass Filter

## VLFG-630+

50Ω DC to 630 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FF704

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


### Features

- Low loss, 1.5 dB typical
- Good rejection 46 dB typical
- Good power handling, 3.5 W
- Temperature stable
- Connectorized package
- Rugged unibody construction

### Applications

- Harmonic Rejection
- VHF/UHF transmitters / receivers
- Military radar applications
- Test and measurement
- Telecommunications & broadband wireless applications
- Satcom modems

### Functional Schematic

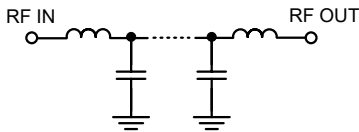

### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC - 630	—	1.5	2.1	dB
	Freq. Cut-Off	F2*	780	—	3.0	—	dB
	Return Loss	DC-F1	DC - 630	—	14	—	dB
Stop Band	Rejection Loss	F3-F4	1050 - 1500	20	50	—	dB
		F4-F5	1500 - 3800	35	46	—	dB
		F5-F6	3800 - 8500	—	21	—	dB

In Application where DC voltage is present at either input or output port, DC blocks are required.  
\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

### Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	3.5 W max. @25°C

\*Passband rating, derate linearly to 0.8 W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.13	35.14
100	0.27	24.57
500	0.94	19.82
600	1.30	15.22
630	1.43	14.66
780	2.74	19.89
800	3.37	18.02
910	20.78	2.91
950	30.19	1.91
1000	41.66	1.32
1050	52.12	1.00
1500	53.83	0.38
2000	47.40	0.32
2400	46.22	0.30
3000	48.23	0.26
3800	64.87	0.24
4000	63.26	0.25
5000	27.91	0.75
7000	33.95	0.43
8500	32.39	2.06

### Typical Frequency Response

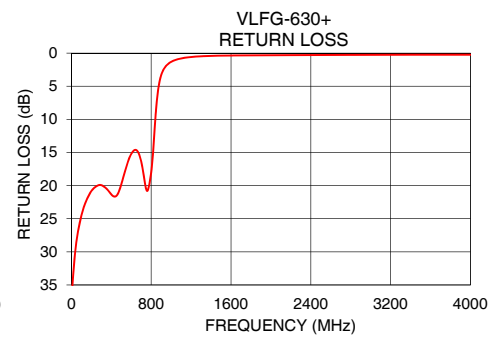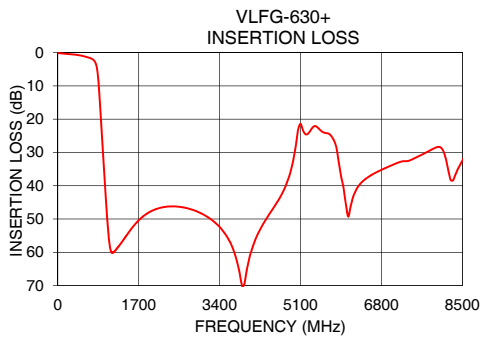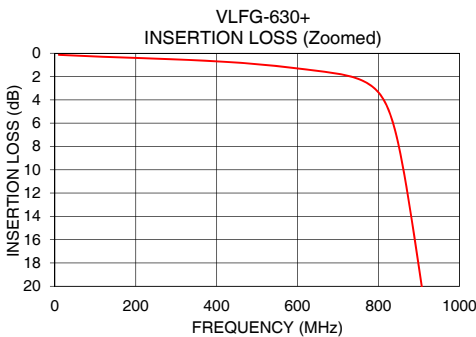

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



**Coaxial Connections**

PORT - 1	SMA-Male
PORT - 2	SMA-Female

**Outline Drawing**

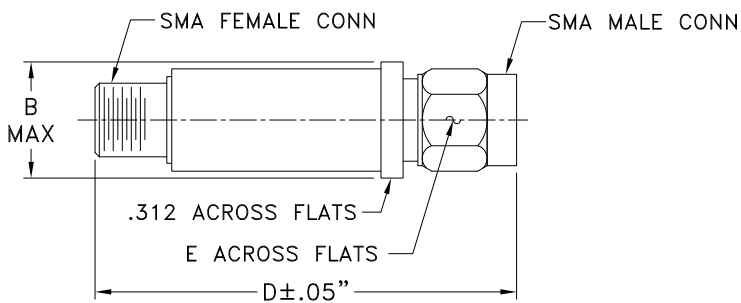

**Outline Dimensions ( inch / mm )**

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Note: Please refer to case style drawing for details

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



*Typical Performance Data*


FREQ.  (MHz)	INSERTION LOSS			INPUT RETURN LOSS			OUTPUT RETURN LOSS		
	(dB)			(dB)			(dB)		
	@-55°C	@+25°C	@+100°C	@-55°C	@+25°C	@+100°C	@-55°C	@+25°C	@+100°C
10	0.10	0.13	0.16	37.70	35.58	33.57	36.69	35.14	32.97
40	0.15	0.18	0.21	33.69	30.66	28.73	32.32	29.80	28.06
100	0.24	0.27	0.30	28.30	26.74	25.33	25.61	24.57	23.60
200	0.36	0.40	0.43	24.08	25.01	26.51	20.65	20.83	21.38
300	0.46	0.53	0.57	25.05	24.40	25.27	20.88	19.94	19.93
400	0.61	0.69	0.75	21.00	22.15	22.61	20.77	21.33	21.00
420	0.65	0.73	0.79	20.23	21.38	22.05	20.69	21.60	21.60
460	0.73	0.82	0.89	18.87	19.69	20.58	20.27	21.40	22.35
490	0.80	0.91	0.97	17.86	18.37	19.22	19.43	20.32	21.62
500	0.83	0.94	1.00	17.53	17.95	18.75	19.05	19.82	21.12
590	1.12	1.26	1.36	15.15	15.02	15.30	15.54	15.51	15.93
600	1.16	1.30	1.40	15.05	14.87	15.09	15.32	15.22	15.56
630	1.27	1.43	1.54	15.06	14.71	14.78	15.00	14.66	14.80
700	1.58	1.76	1.91	18.89	17.62	16.90	17.59	16.37	15.72
720	1.72	1.90	2.05	22.40	20.32	18.94	19.53	17.96	16.92
780	2.66	2.74	2.87	18.40	21.89	25.04	18.88	19.89	19.82
800	3.45	3.37	3.44	12.71	15.50	17.69	15.86	18.02	18.68
820	4.92	4.49	4.40	8.18	10.55	12.33	11.70	14.75	16.43
850	9.29	7.97	7.36	3.83	5.22	6.44	6.20	8.31	10.19
910	22.89	20.78	19.44	1.37	1.75	2.10	2.32	2.91	3.50
950	32.39	30.19	28.79	0.97	1.23	1.44	1.56	1.91	2.24
960	34.73	32.51	31.11	0.91	1.15	1.35	1.43	1.76	2.05
1000	43.89	41.66	40.26	0.72	0.93	1.09	1.08	1.32	1.52
1050	53.91	52.12	50.93	0.58	0.76	0.89	0.82	1.00	1.14
1200	59.24	59.63	59.90	0.37	0.52	0.62	0.48	0.59	0.66
1300	57.18	57.80	58.27	0.31	0.44	0.54	0.39	0.48	0.53
1500	53.04	53.83	54.33	0.25	0.37	0.46	0.31	0.38	0.42
2000	46.94	47.40	47.56	0.26	0.35	0.41	0.25	0.32	0.35
2900	47.47	47.59	47.44	0.25	0.37	0.44	0.18	0.27	0.31
3000	48.16	48.23	48.04	0.25	0.37	0.45	0.18	0.26	0.31
3300	51.10	51.05	50.62	0.27	0.39	0.47	0.16	0.25	0.30
3500	54.38	54.18	53.46	0.29	0.41	0.49	0.15	0.25	0.31
3700	60.41	59.69	58.18	0.32	0.43	0.51	0.13	0.24	0.31
3800	66.22	64.87	62.32	0.33	0.44	0.53	0.13	0.24	0.32
4000	61.53	63.26	67.80	0.33	0.46	0.57	0.12	0.25	0.33
4200	53.63	54.57	56.40	0.34	0.49	0.62	0.11	0.25	0.34
4500	46.41	47.32	48.57	0.35	0.54	0.73	0.11	0.26	0.37
4700	41.32	42.66	44.01	0.40	0.61	0.84	0.14	0.28	0.40
4900	32.01	35.17	37.43	0.64	0.78	1.02	0.33	0.38	0.48
5000	23.61	27.91	31.55	1.13	1.06	1.22	1.25	0.75	0.67
5300	22.23	23.57	24.69	6.55	4.03	3.08	0.28	0.45	0.62
5500	23.84	23.10	22.87	2.98	3.89	5.54	0.18	0.39	0.58
5700	25.92	24.44	24.52	7.18	6.27	4.67	0.24	0.40	0.56
5900	37.54	32.74	28.58	1.52	2.41	3.82	0.32	0.56	0.78
6000	44.84	40.48	37.73	0.97	1.43	2.06	0.24	0.52	0.72
6300	39.03	40.43	41.33	0.57	0.78	1.07	0.14	0.35	0.53
6500	36.82	37.58	38.00	0.51	0.70	0.92	0.15	0.35	0.52
6700	35.36	35.90	36.26	0.49	0.67	0.85	0.17	0.36	0.53
6900	34.13	34.58	34.93	0.51	0.68	0.84	0.22	0.39	0.54
7000	33.54	33.95	34.30	0.54	0.71	0.85	0.30	0.43	0.56
7300	32.56	32.61	32.66	0.69	0.84	0.97	0.78	1.15	1.03
7500	31.16	31.69	32.10	0.98	1.06	1.18	0.42	0.66	0.92
7700	29.67	30.30	30.77	1.62	1.55	1.60	0.43	0.56	0.68
7900	28.26	28.79	29.42	3.36	2.74	2.56	0.65	0.66	0.71
8000	28.97	28.33	28.84	5.28	4.01	3.51	0.87	0.81	0.79
8100	33.53	29.66	29.00	8.60	6.16	5.10	0.96	1.01	0.96
8200	38.89	35.18	32.08	15.53	9.75	7.69	1.01	1.05	1.10
8300	35.74	38.40	38.97	15.23	16.40	12.34	1.27	1.11	1.11
8400	32.77	35.09	37.78	8.43	13.11	18.31	1.84	1.44	1.24
8500	30.01	32.39	34.35	5.25	7.67	11.23	2.09	2.06	1.67

*Typical Performance Data*


FREQ.  (MHz)	GROUP DELAY		
	(nsec)		
	@-55°C	@+25°C	@+100°C
10	0.98	1.00	0.96
20	1.00	0.98	0.97
30	0.99	0.98	0.96
40	0.99	0.98	0.96
50	0.99	0.98	0.96
60	0.99	0.97	0.96
70	0.99	0.97	0.96
80	0.99	0.97	0.96
90	0.99	0.97	0.96
100	0.99	0.97	0.95
110	0.99	0.97	0.96
120	0.99	0.97	0.96
130	0.99	0.97	0.96
140	0.99	0.97	0.96
150	0.99	0.98	0.96
160	1.00	0.98	0.97
170	1.00	0.98	0.97
180	1.00	0.99	0.97
190	1.01	0.99	0.98
200	1.01	0.99	0.98
220	1.02	1.00	0.99
240	1.04	1.01	1.00
260	1.05	1.03	1.01
280	1.06	1.04	1.02
300	1.08	1.06	1.04
320	1.10	1.07	1.05
340	1.12	1.09	1.07
360	1.14	1.11	1.09
380	1.16	1.13	1.11
400	1.19	1.16	1.14
420	1.22	1.19	1.17
440	1.25	1.22	1.19
460	1.28	1.25	1.23
480	1.32	1.28	1.26
500	1.36	1.32	1.30
520	1.40	1.36	1.34
540	1.45	1.41	1.38
560	1.51	1.46	1.43
580	1.57	1.52	1.49
600	1.65	1.59	1.55
630	1.78	1.71	1.67

## Typical Performance Curves


**INSERTION LOSS vs. TEMPERATURE**  
INPUT POWER = 0 dBm

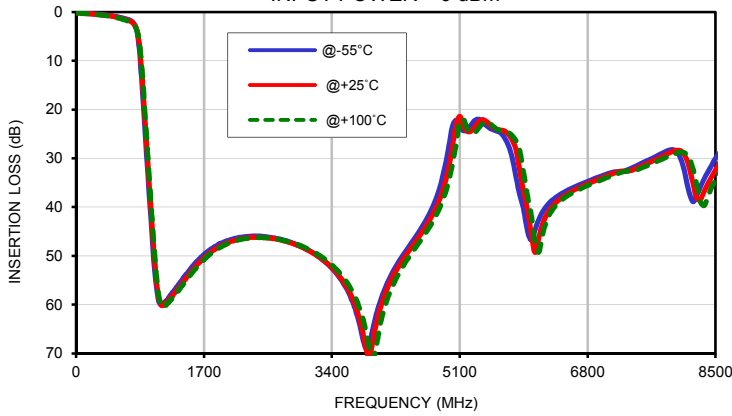


**INSERTION LOSS vs. TEMPERATURE (Zoomed)**  
INPUT POWER = 0 dBm

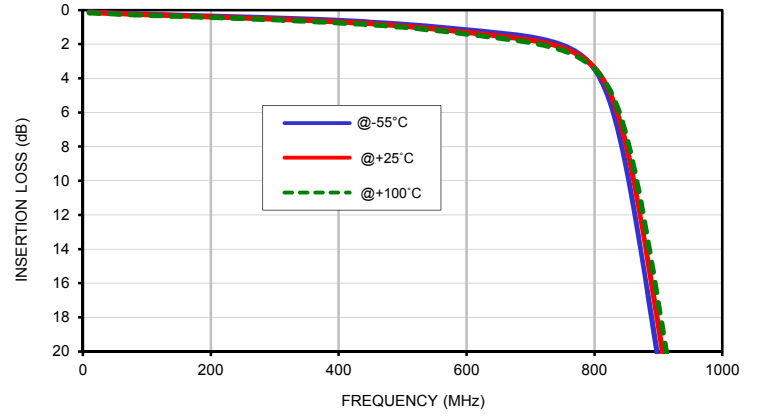


**INPUT RETURN LOSS vs. TEMPERATURE**  
INPUT POWER = 0 dBm

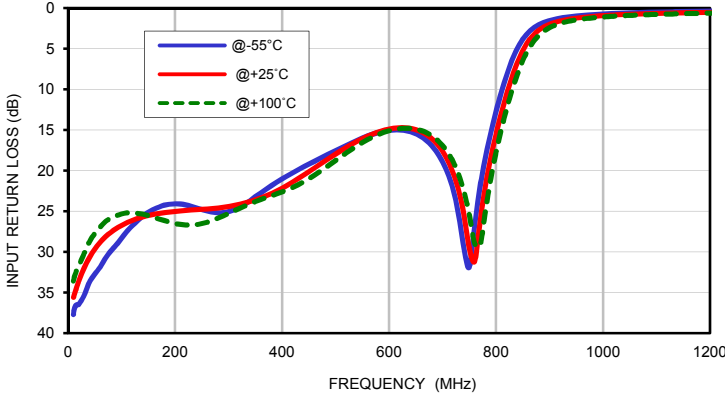

**OUTPUT RETURN LOSS vs. TEMPERATURE**  
INPUT POWER = 0 dBm

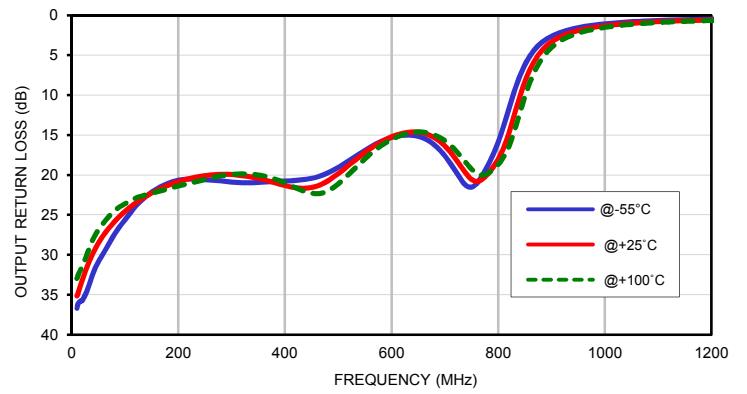

**GROUP DELAY vs. TEMPERATURE**  
INPUT POWER = 0 dBm

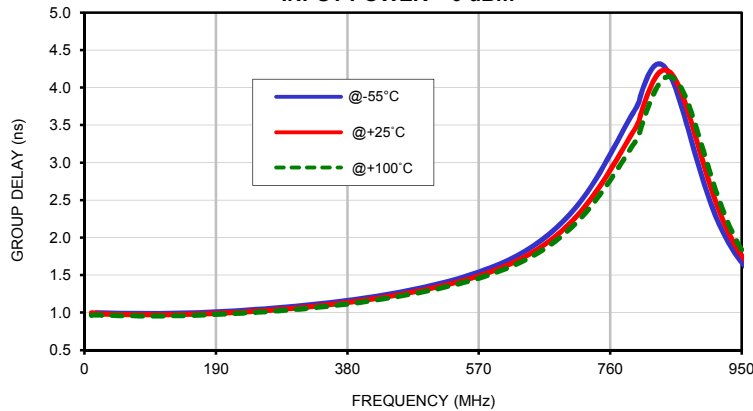


# Case Style

# FF

## FF704

### Outline Dimensions

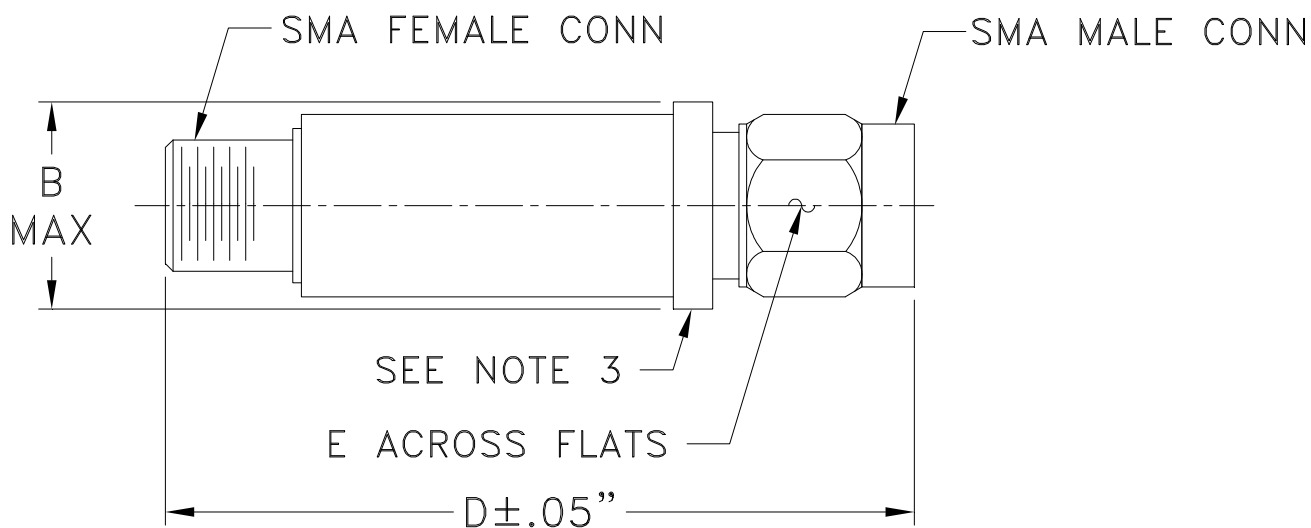

CASE #.	A	B	C	D	E	WT GRAMS
FF704	--	.410 (10.41)	--	1.43 (36.32)	.312 (7.92)	10.0

Dimensions are in inches (mm). Tolerances: 2Pl. ± .04; 3Pl. ± .030

#### Notes:

1. Case material: Stainless steel.
2. Case finish: Gold plated.
3. Round Flange may have .312 Across Flats in some models.

**Mini-Circuits**<sup>®</sup>  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 5 cycles	MIL-STD-202, Method 107, Condition A, Except +100°C