

High Power Bi-Directional Coupler

ZABDC50-150HP+

50Ω Up to 100W 0.4 to 15 MHz

Maximum Ratings


Operating Temperature	-55°C to 75°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

INPUT	1 (N-Type)
OUTPUT	4 (N-Type)
COUPLED (forward)	2 (SMA)
COUPLED (reverse)	3 (SMA)

Outline Drawing

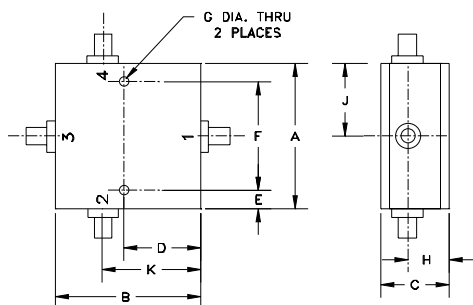

Outline Dimensions (inch/mm)

A	B	C	D	E	F
2.00	2.00	.95	1.062	.125	1.75
50.80	50.80	24.13	26.97	3.18	44.45

G	H	J	K	wt
.125	.575	1.00	1.35	grams
3.18	14.61	25.40	34.29	200

Features

- good coupling flatness, 0.5 dB typ.
- high directivity, 30 dB typ.
- excellent VSWR, 1.03:1 typ.
- high power, up to 100W
- extremely low insertion loss, 0.01 dB typ.

Applications

- HF radios
- AM radio, amateur radio, medical ultrasound



Generic photo used for illustration purposes only
CASE STYLE: HHH141

Connectors Model
N-Type/SMA ZABDC50-150HP+

+RoHS Compliant




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C


Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		0.4	—	15	MHz
Mainline Loss	0.4-15	—	0.01	0.1	dB
Coupling	0.4-15	49	50	51.5	dB
Coupling Flatness(±)	0.4-15	—	0.5	—	dB
Directivity	0.4-15	20	30	—	dB
Return Loss (Input)	0.4-15	22	33	—	dB
Return Loss (Output)	0.4-15	22	33	—	dB
Return Loss (Coupling)	0.4-15	27	36	—	dB
Input Power		—	—	100	W

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	In-Cpl Rev	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
0.40	0.01	50.15	50.10	50.10	32.18	40.29	35.74	36.52	37.04	36.94
1.00	0.01	50.08	50.10	50.10	35.11	36.32	45.88	47.67	37.03	36.94
2.00	0.01	50.11	50.11	50.11	35.65	36.55	52.79	58.48	37.03	36.94
3.00	0.01	50.12	50.13	50.13	35.04	35.13	46.31	47.13	37.04	36.92
4.00	0.01	50.14	50.12	50.12	35.59	35.62	42.55	42.92	37.02	36.88
5.00	0.01	50.18	50.16	50.16	35.68	35.36	40.05	40.33	37.02	36.87
6.00	0.01	50.20	50.16	50.16	35.44	35.20	38.16	38.38	37.00	36.84
8.00	0.01	50.26	50.24	50.24	35.34	33.02	35.36	35.53	36.98	36.79
10.00	0.02	50.36	50.36	50.36	36.11	31.02	33.30	33.45	36.97	36.76
15.00	0.02	50.67	50.61	50.61	34.91	29.72	29.59	29.73	36.92	36.64

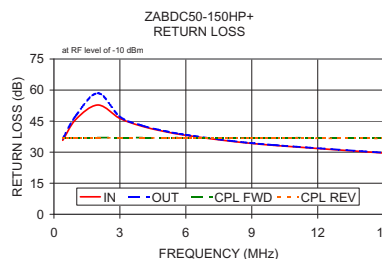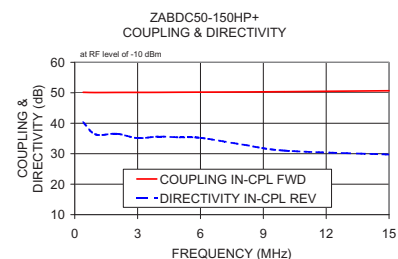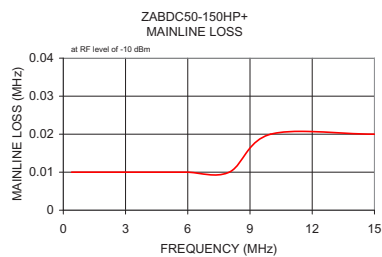

Electrical Schematic

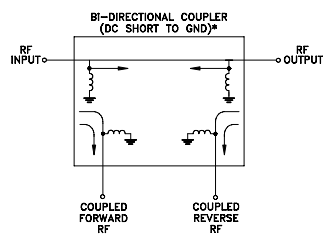

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV B
M170641
ED-16206/1
ZABDC50-150HP+
DJ/CP/AM
200923
Page 1 of 1

Bi-Directional Coupler

ZABDC50-150HP+





Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB) IN-OUT	COUPLING (dB)		DIRECTIVITY (dB)		RETURN LOSS (dB)			
		IN-FWD	OUT-REV	IN-REV	OUT-FWD	IN	OUT	FWD	REV
0.30	0.01	50.17	50.09	39.28	33.55	33.06	33.74	37.05	36.95
0.35	0.01	50.06	50.11	35.38	34.90	34.50	35.24	37.04	36.95
0.40	0.01	50.15	50.10	40.29	32.18	35.74	36.52	37.04	36.94
0.50	0.01	50.09	50.11	37.89	35.57	37.91	38.71	37.03	36.94
0.60	0.01	50.09	50.10	38.00	35.47	39.76	40.69	37.02	36.93
0.70	0.01	50.09	50.11	35.48	34.34	41.45	42.53	37.03	36.93
0.80	0.01	50.10	50.10	36.35	34.89	43.01	44.20	37.04	36.93
0.90	0.01	50.10	50.08	36.91	35.05	44.47	45.89	37.04	36.94
1.00	0.01	50.08	50.10	36.32	35.11	45.88	47.67	37.03	36.94
1.50	0.01	50.12	50.07	42.95	34.09	52.29	60.02	37.04	36.94
2.00	0.01	50.11	50.11	36.55	35.65	52.79	58.48	37.03	36.94
2.50	0.01	50.10	50.16	36.95	35.60	49.14	50.75	37.03	36.92
3.00	0.01	50.12	50.13	35.13	35.04	46.31	47.13	37.04	36.92
4.00	0.01	50.14	50.12	35.62	35.59	42.55	42.92	37.02	36.88
5.00	0.01	50.18	50.16	35.36	35.68	40.05	40.33	37.02	36.87
6.00	0.01	50.20	50.16	35.20	35.44	38.16	38.38	37.00	36.84
7.00	0.01	50.24	50.20	33.65	35.32	36.64	36.84	36.99	36.82
8.00	0.01	50.26	50.24	33.02	35.34	35.36	35.53	36.98	36.79
9.00	0.01	50.30	50.26	33.17	34.95	34.25	34.42	36.96	36.77
10.0	0.02	50.36	50.36	31.02	36.11	33.30	33.45	36.97	36.76
12.5	0.02	50.50	50.45	30.64	35.15	31.25	31.39	36.94	36.69
15.0	0.02	50.67	50.61	29.72	34.91	29.59	29.73	36.92	36.64
17.5	0.02	50.87	50.82	27.87	34.35	28.19	28.32	36.89	36.58
20.0	0.03	51.12	51.07	26.71	35.01	26.98	27.10	36.87	36.52
22.5	0.03	51.38	51.34	25.58	35.00	25.90	26.01	36.85	36.46
25.0	0.04	51.71	51.66	24.50	35.86	24.92	25.03	36.83	36.39


Bi-Directional Coupler

ZABDC50-150HP+

Typical Performance Curves

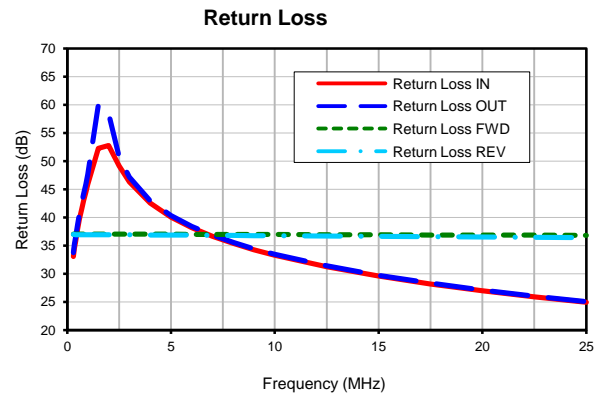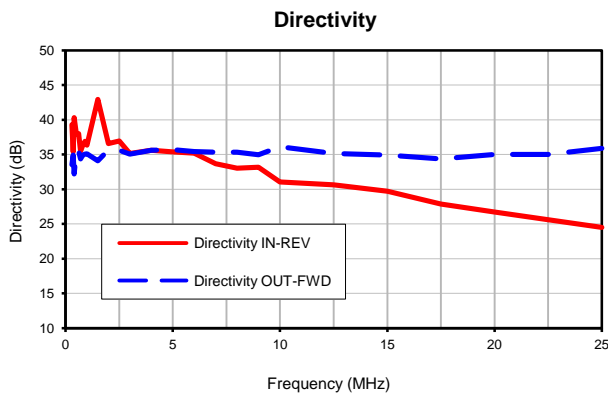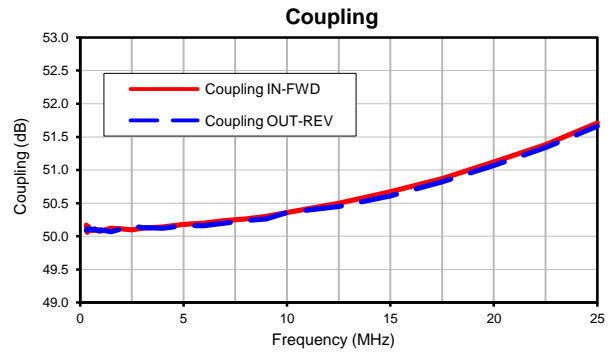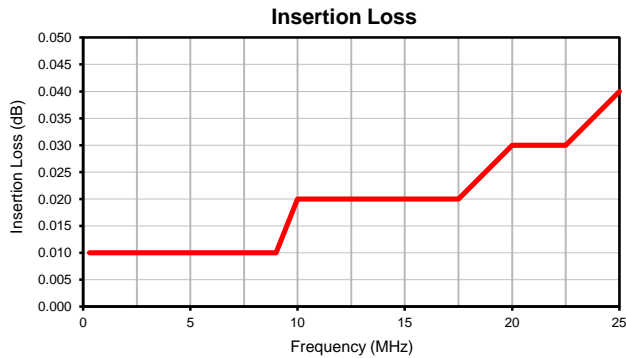

Outline Dimensions

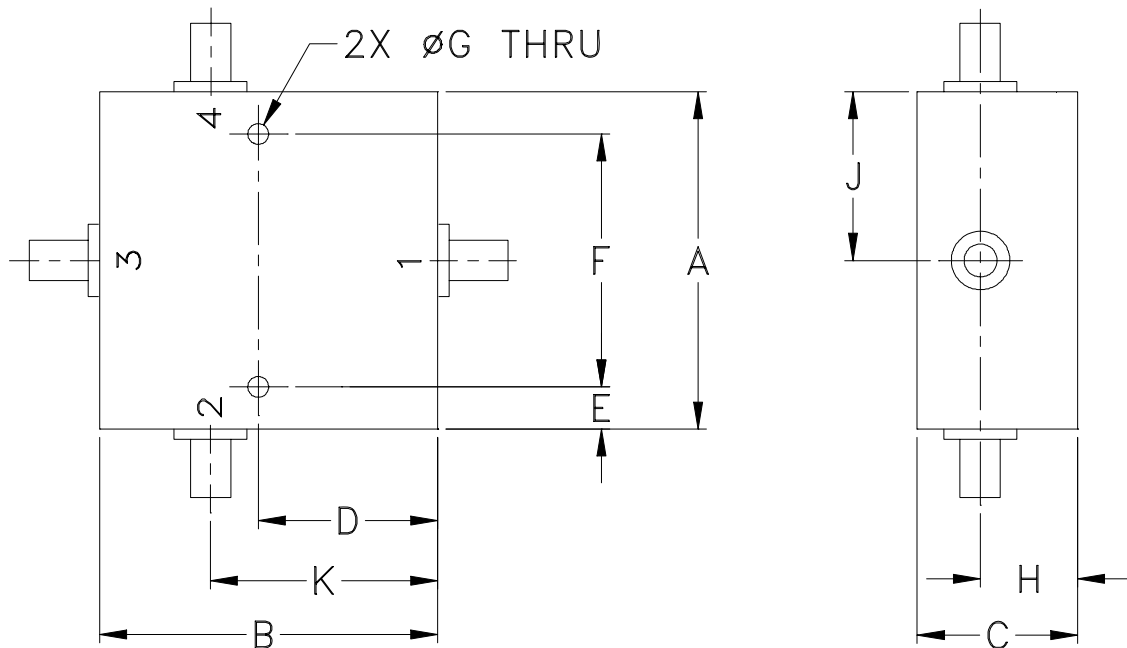

CASE#	A	B	C	D	E	F	G	H	J	K	WT. GRAM
HHH141	2.00 (50.80)	2.00 (50.80)	.95 (24.13)	1.062 (26.98)	.125 (3.18)	1.75 (44.45)	.125 (3.18)	.575 (14.60)	1.00 (25.4)	1.35 (34.29)	200

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .03$; 3 Pl. $\pm .015$

Notes:

- Case material: Aluminum alloy.
- Case finish:
For RoHS Case Styles: Clear chemical conversion coating, non-chrome or trivalent chrome based.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 75°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Barometric Pressure	100,000 Feet	MIL-STD-202, Method 105, Condition D
Humidity	90% RH, 65°C Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103
Thermal Shock	-65° to 125°C, 5 cycles	MIL-STD-202, Method 107, Condition B
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	100g, 6ms sawtooth, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition I