


# Cavity Bandpass Filters

50Ω DC to 15 GHz

## The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 15 GHz
- Stopbands up to 20 GHz

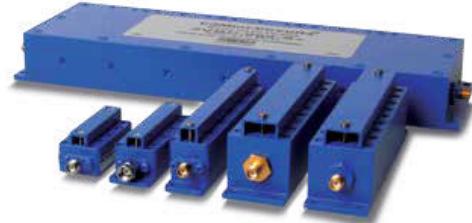

## Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



Cavity

# Bandpass Filter

50Ω 2400 to 2500 MHz

ZVBP-2450A-S+


## Features

- Low insertion loss, 0.9 dB typical
- Broad stopband performance up to 10 GHz
- Fast roll-off
- Connectorized package
- Small size


## Applications

- Fixed and mobile communication network
- Radio location

## Functional Schematic

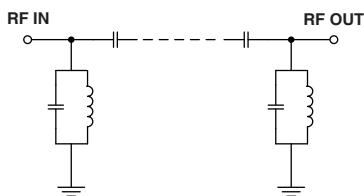

## Typical Frequency Response



### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.



Generic photo used for illustration purposes only

CASE STYLE: TU2841

Connectors	Model
SMA-F	ZVBP-2450A-S+

## Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Pass Band</b>	Center Frequency	Fc	-	2450	-	MHz
	Insertion Loss	F1-F2	2400 - 2500	0.9	1.2	dB
	VSWR	F1-F2	2400 - 2500	1.29	1.5	:1
<b>Stop Band, Lower</b>	Insertion Loss	DC-F3	DC - 2050	50	57	-
	VSWR	DC-F3	DC - 2050	-	20	-
<b>Stop Band, Upper</b>	Insertion Loss	F4-F5	2850 - 10000	55	65	-
	VSWR	F4-F5	2850 - 10000	-	20	-





## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	5 W max.

Permanent damage may occur if any of these limits are exceeded.

## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10.0	74.52	4020.04	2400.0	7.29
100.0	88.46	594.68	2405.0	6.87
500.0	102.31	153.97	2410.0	6.58
1000.0	96.39	175.61	2415.0	6.39
2000.0	61.52	315.05	2420.0	6.25
2050.0	57.87	317.13	2425.0	6.15
2279.0	30.15	141.38	2430.0	6.07
2320.0	20.43	70.08	2435.0	6.00
2372.0	3.15	3.86	2440.0	5.94
2400.0	0.64	1.12	2445.0	5.90
2450.0	0.59	1.21	2450.0	5.88
2500.0	0.71	1.20	2455.0	5.88
2531.0	3.10	3.45	2460.0	5.92
2576.0	20.10	49.40	2465.0	5.99
2611.0	30.12	93.68	2470.0	6.08
2850.0	66.12	264.71	2475.0	6.18
8000.0	97.22	141.30	2480.0	6.29
9000.0	96.00	207.33	2485.0	6.42
9500.0	95.41	237.94	2490.0	6.58
10000.0	95.21	243.96	2500.0	7.09

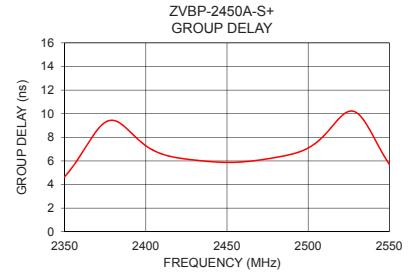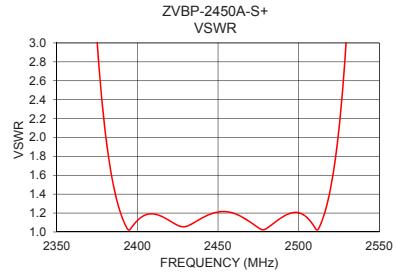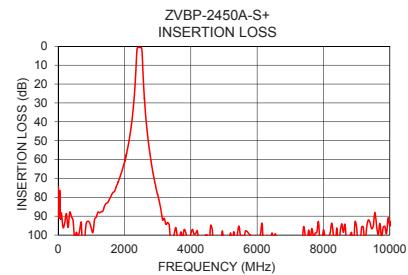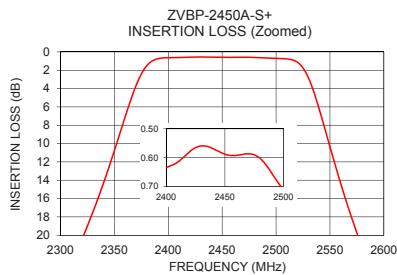


### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

**Coaxial Connections**

PORT-1	SMA-Female
PORT-2	SMA-Female

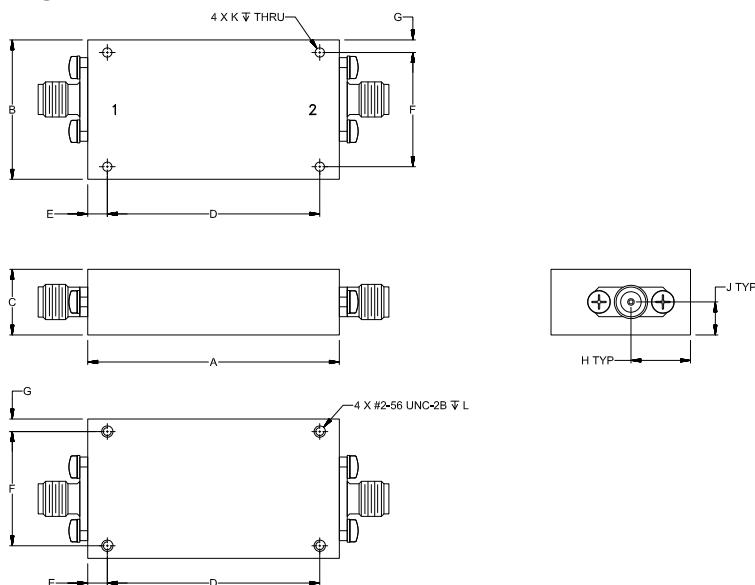**Outline Drawing****Outline Dimensions ( inch )**

A	B	C	D	E	F	G
1.89	1.05	.50	1.600	.15	.860	.10
48.1	26.7	12.6	40.64	3.7	21.84	2.4

H	J	K	L	Wt.
.45	.25	.070	.100	grams
11.4	6.3	1.79	2.54	93

Note: Please refer to case style drawing for details

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Cavity Band Pass Filter

**ZVBP-2450A-S+**

## Typical Performance Data

FREQ. (MHz)	INSERTION LOSS (dB)			INPUT RETURN LOSS (dB)			OUTPUT RETURN LOSS (dB)		
	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C	@-40°C	@+25°C	@+85°C
	83.54	74.52	76.77	0.00	0.00	0.01	0.01	0.00	0.01
100.0	88.52	88.46	89.85	0.03	0.03	0.03	0.02	0.02	0.02
300.0	93.98	95.98	90.80	0.08	0.09	0.10	0.06	0.08	0.08
500.0	100.74	102.31	101.29	0.09	0.11	0.13	0.07	0.10	0.10
700.0	102.31	93.53	98.09	0.08	0.11	0.13	0.07	0.10	0.10
900.0	96.27	92.70	96.23	0.07	0.10	0.12	0.06	0.09	0.09
1000.0	93.99	96.39	91.10	0.06	0.10	0.12	0.05	0.09	0.09
1100.0	91.32	91.64	89.62	0.05	0.09	0.11	0.05	0.08	0.08
1200.0	89.80	87.91	89.92	0.05	0.09	0.11	0.04	0.07	0.07
1300.0	86.55	87.64	86.31	0.04	0.09	0.11	0.03	0.07	0.07
1400.0	84.32	84.57	86.27	0.03	0.08	0.10	0.02	0.06	0.06
2000.0	61.46	61.52	61.41	0.01	0.06	0.09	0.02	0.04	0.05
2050.0	57.91	57.87	57.74	0.02	0.05	0.09	0.02	0.05	0.06
2200.0	43.11	42.90	42.79	0.01	0.07	0.11	0.01	0.07	0.08
2279.0	30.48	30.15	29.93	0.04	0.12	0.17	0.04	0.12	0.14
2300.0	25.95	25.56	25.30	0.07	0.16	0.21	0.07	0.16	0.19
2320.0	20.90	20.43	20.10	0.15	0.25	0.30	0.15	0.25	0.28
2372.0	3.55	3.15	2.80	3.75	4.60	5.35	3.77	4.58	5.31
2400.0	0.52	0.64	0.69	26.78	24.85	22.76	27.79	25.32	23.08
2450.0	0.47	0.59	0.64	20.06	20.39	20.02	20.32	20.55	20.07
2500.0	0.57	0.71	0.77	20.44	20.69	21.38	20.00	20.33	20.96
2531.0	2.38	3.10	3.62	6.21	5.19	4.54	6.12	5.14	4.50
2576.0	19.31	20.10	20.68	0.28	0.35	0.37	0.26	0.32	0.33
2600.0	26.62	27.27	27.76	0.14	0.22	0.25	0.12	0.19	0.21
2611.0	29.52	30.12	30.58	0.10	0.19	0.22	0.09	0.16	0.18
2700.0	47.02	47.45	47.80	0.01	0.10	0.14	0.00	0.08	0.10
2850.0	65.69	66.12	66.24	0.02	0.07	0.11	0.03	0.06	0.08
2900.0	70.26	70.60	70.96	0.03	0.06	0.11	0.03	0.06	0.08
3000.0	79.11	78.26	79.09	0.03	0.06	0.11	0.03	0.06	0.08
3200.0	89.73	91.13	88.96	0.03	0.06	0.11	0.03	0.06	0.09
3400.0	101.03	106.34	97.37	0.02	0.07	0.13	0.03	0.07	0.10
3600.0	101.19	101.79	117.36	0.00	0.09	0.14	0.03	0.08	0.11
3800.0	113.08	97.12	116.04	0.02	0.11	0.16	0.01	0.09	0.12
4000.0	114.45	99.32	99.16	0.04	0.12	0.17	0.00	0.10	0.13
4200.0	102.29	97.79	108.58	0.06	0.14	0.19	0.01	0.12	0.14
4400.0	100.78	101.54	105.63	0.08	0.16	0.20	0.02	0.13	0.15
5000.0	106.52	104.97	93.30	0.11	0.19	0.23	0.06	0.16	0.18
5500.0	104.28	100.53	106.64	0.11	0.19	0.22	0.07	0.17	0.18
6000.0	101.91	105.46	95.82	0.10	0.18	0.20	0.07	0.18	0.19
6100.0	100.41	99.75	99.01	0.09	0.18	0.20	0.06	0.18	0.19
6300.0	100.21	100.47	98.70	0.09	0.18	0.20	0.06	0.18	0.19
6500.0	106.38	102.69	111.48	0.08	0.17	0.18	0.05	0.18	0.18
6700.0	103.43	113.99	112.04	0.07	0.17	0.18	0.04	0.17	0.18
7000.0	101.12	106.08	99.52	0.06	0.16	0.17	0.03	0.16	0.17
7100.0	97.64	103.70	99.28	0.05	0.16	0.17	0.02	0.16	0.17
7300.0	103.86	103.31	105.48	0.04	0.15	0.16	0.01	0.16	0.16
7500.0	109.65	106.92	108.79	0.03	0.14	0.16	0.00	0.15	0.16
7700.0	95.92	101.25	107.16	0.02	0.14	0.16	0.02	0.15	0.16
7900.0	101.87	106.35	102.76	0.00	0.13	0.15	0.03	0.14	0.16
8000.0	101.38	97.22	96.37	0.01	0.12	0.14	0.04	0.14	0.15
8300.0	96.28	100.35	97.35	0.02	0.11	0.14	0.06	0.13	0.15
8500.0	95.56	99.09	95.24	0.03	0.10	0.14	0.08	0.12	0.15
8700.0	94.90	106.04	97.86	0.04	0.10	0.14	0.10	0.11	0.14
8900.0	94.97	108.98	103.21	0.05	0.09	0.13	0.11	0.10	0.14
9000.0	96.03	96.00	98.57	0.06	0.08	0.13	0.11	0.10	0.14
9300.0	96.47	96.18	94.15	0.06	0.08	0.13	0.12	0.09	0.14
9500.0	95.24	95.41	98.65	0.07	0.07	0.14	0.14	0.08	0.13
9700.0	91.86	93.82	111.06	0.08	0.07	0.14	0.14	0.08	0.14
9900.0	105.42	99.24	92.06	0.07	0.07	0.15	0.15	0.07	0.14
10000.0	98.32	95.21	95.51	0.08	0.07	0.16	0.15	0.07	0.13



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS








*Typical Performance Data*

FREQ. (MHz)	GROUP DELAY		
	(nsec)		
	@-40°C	@+25°C	@+85°C
2400.0	7.50	7.29	7.14
2402.0	7.29	7.10	6.97
2404.0	7.10	6.94	6.82
2406.0	6.94	6.80	6.70
2408.0	6.80	6.68	6.60
2410.0	6.68	6.58	6.51
2412.0	6.58	6.49	6.43
2414.0	6.50	6.42	6.37
2416.0	6.42	6.36	6.31
2418.0	6.36	6.30	6.27
2420.0	6.31	6.25	6.22
2422.0	6.26	6.21	6.19
2424.0	6.22	6.17	6.15
2426.0	6.18	6.14	6.12
2428.0	6.15	6.10	6.08
2430.0	6.11	6.07	6.05
2432.0	6.08	6.04	6.03
2434.0	6.05	6.01	6.00
2436.0	6.02	5.99	5.97
2438.0	6.00	5.96	5.95
2440.0	5.97	5.94	5.93
2442.0	5.95	5.92	5.91
2444.0	5.93	5.90	5.89
2446.0	5.91	5.89	5.88
2448.0	5.90	5.88	5.88
2450.0	5.89	5.88	5.88
2452.0	5.88	5.88	5.88
2454.0	5.88	5.88	5.89
2456.0	5.88	5.89	5.90
2458.0	5.89	5.90	5.92
2460.0	5.91	5.92	5.94
2462.0	5.93	5.95	5.97
2464.0	5.95	5.97	6.00
2466.0	5.98	6.00	6.03
2468.0	6.01	6.04	6.07
2470.0	6.04	6.08	6.11
2472.0	6.08	6.12	6.15
2480.0	6.25	6.29	6.34
2486.0	6.40	6.45	6.50
2490.0	6.52	6.58	6.64
2500.0	6.96	7.09	7.22

# Cavity Band Pass Filter

ZVBP-2450A-S+

## Typical Performance Curves

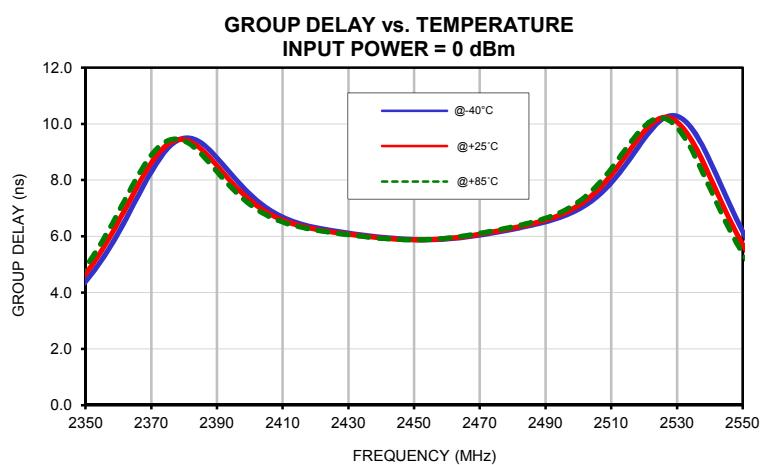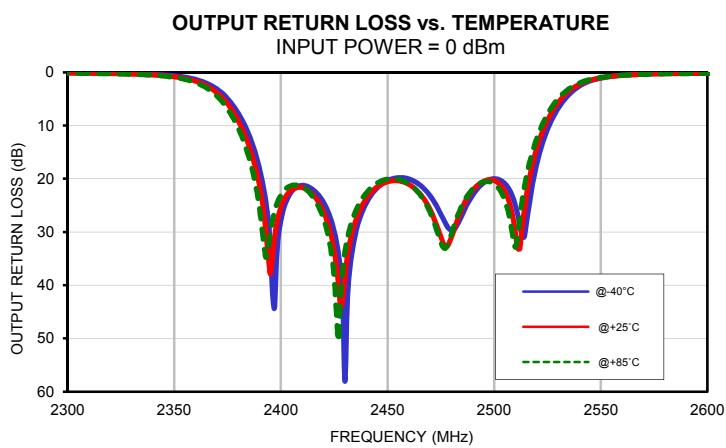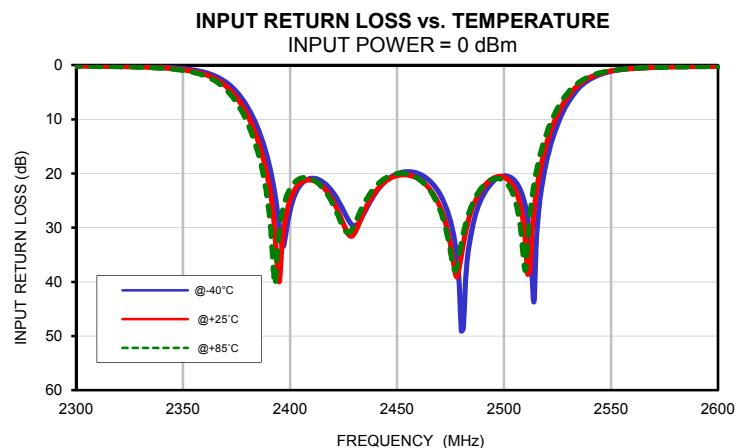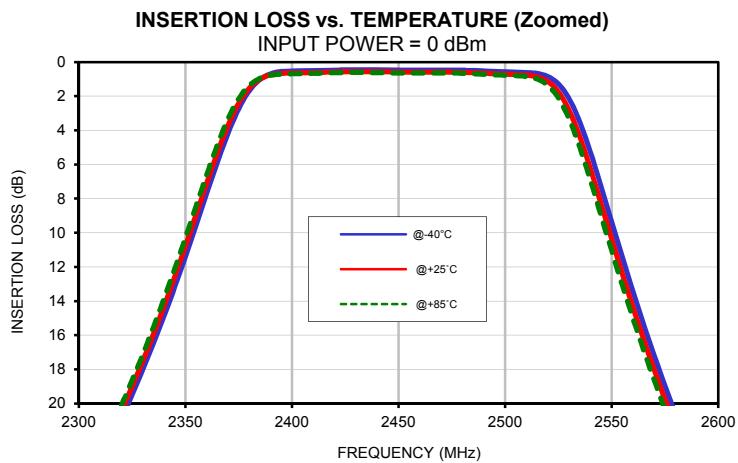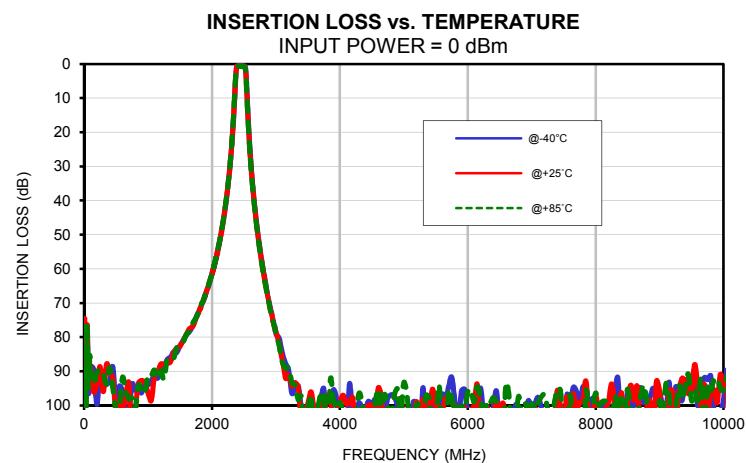


# Case Style

TU

## Outline Dimensions

TU2841

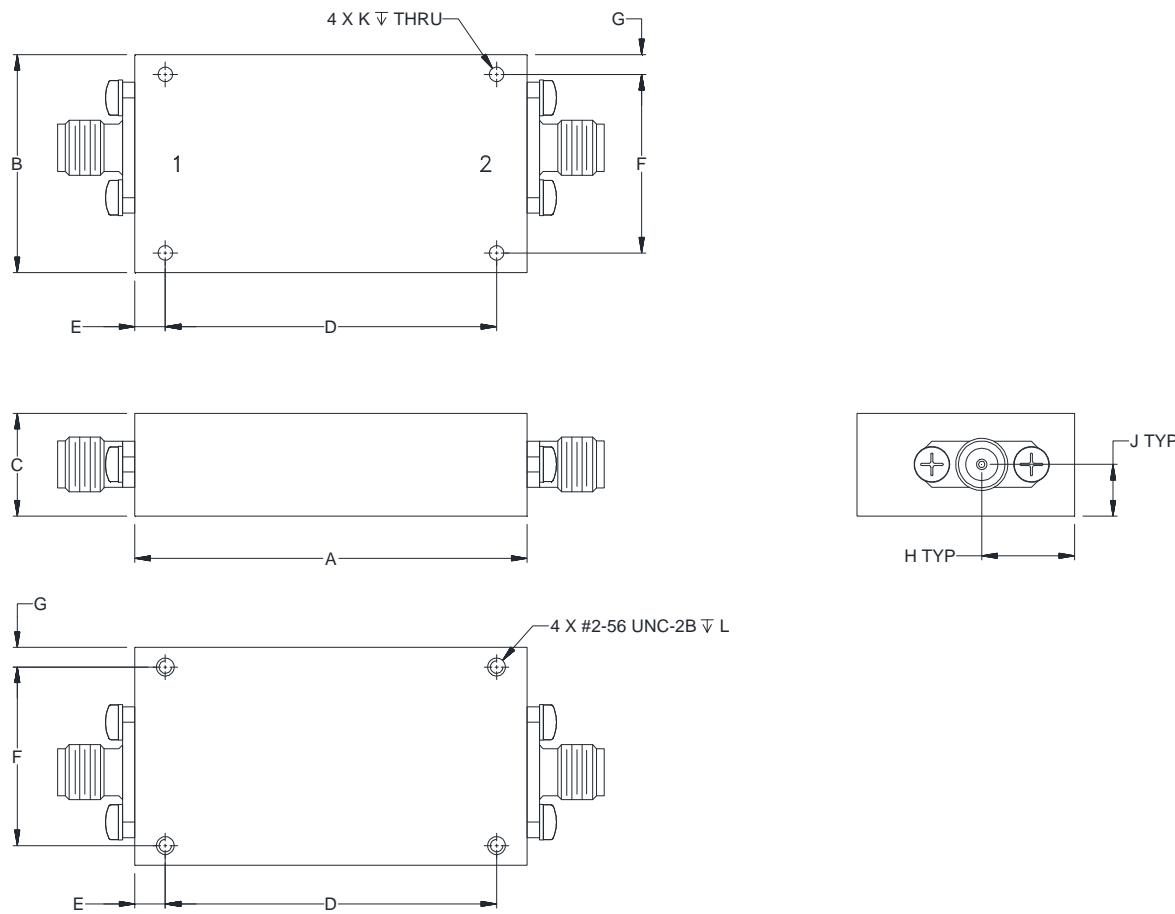

CASE#	A	B	C	D	E	F
TU2841	.1.89 (48.1)	1.05 (26.7)	.50 (12.6)	1.600 (40.64)	.15 (3.7)	.860 (21.84)

CASE#	G	H	J	K	L	WT. GRAMS
TU2841	.10 (2.4)	.45 (11.4)	.25 (6.3)	.070 (1.78)	.100 (2.54)	93

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .100$ ; 3 Pl.  $\pm .015$

### Notes:

1. Case material: Brass & Aluminum alloy.
2. Case Finish: Powder coated.
3. Refer to the individual model data sheet for the type of connectors available.

 **Mini-Circuits®**  
ISO 9001 ISO 14001 CERTIFIED

ALL NEW  
[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 40°C, 96 hours; Units may require bake-out after humidity to restore full performance.	MIL-STD-202, Method 103, Condintion B
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11ms half-sine, 3 shocks each direction 3 axes (total 18)	MIL-STD-202, Method 213, Condition A