

Coaxial Reflectionless Low Pass Filter

ZXLF Series

50Ω DC to 11 GHz



The Big Deal

- Patented design terminates Stopband signals
- Stopband up to 35 GHz
- High Stopband rejection, up to 50 dB

Product Overview

Mini-Circuits' ZXLF Series reflectionless filters employs a novel filter topology which absorbs and terminates stop band signals internally rather than reflecting them back to the source. Reflectionless filters eliminate stopband reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators. This is developed in a new broadband, stable connectorized package.

Key Features

Feature	Advantages
Easy integration with sensitive reflective components, e.g. mixers, multipliers	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range.
Cascadable	Reflectionless filters can be cascaded in multiple sections to provide sharper and higher attenuation, while also preventing any standing waves that could affect pass band signals.
Excellent stability over temperature	Minimal variation in electrical performance across temperature.
Operating temperature up to 105°C	Suitable for operation close to high power components.
Broadband connectorized package	The connectorized package works well even in high frequencies and easy to interface with other devices. This is well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Low Pass Filter

ZXLF-K861+

50Ω DC to 860 MHz



Generic photo used for illustration purposes only

CASE STYLE: UK3042
Connectors Model
2.92mm-F ZXLF-K861+


Features

- Match to 50Ω in the stop band, eliminates undesired reflections
- Cascadable
- Temperature stable, up to 105°C
- Protected by US Patent No. 8,392,495


Applications

- Aerospace & Defense
- CATV
- Military Radios
- CATV Forward Path to 860MHz

Functional Schematic

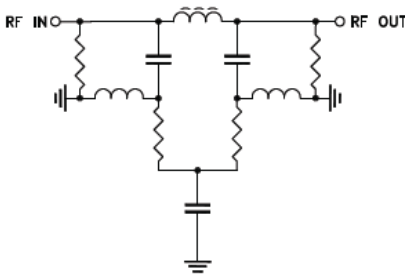

Typical Frequency Response



+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC- 860	-	1.6	2.3	dB
	VSWR	F2	1150	-	3.0	-	dB
Stop Band	Rejection	DC-F1	DC- 860	-	1.2	-	:1
		F3-F4	1700 - 7500	12	15	-	dB
	VSWR	F4-F5	7500 - 20000	-	24	-	dB
		F3-F4	1700 - 7500	-	1.2	-	:1
F4-F5	7500 - 20000	-	1.8	-	-	:1	

Absolute Maximum Ratings³

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
RF Power Input, Passband (DC-F1) ¹	2W at 25°C
RF Power Input, Stopband (F2-F5) ²	0.2W at 25°C



¹ Passband rating derates linearly to 1W at 105°C ambient
² Stopband rating derates linearly to 0.1W at 105°C ambient
³ Permanent damage may occur if any of these limits are exceeded

ESD rating

Human body model (HBM): Class 1A (250 to <500V) in accordance with ANSI/ESD 5.1-2001

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.55	1.03
10	0.52	1.03
100	0.56	1.04
150	0.62	1.06
220	0.66	1.08
310	0.73	1.12
370	0.77	1.14
500	0.89	1.19
860	1.52	1.29
900	1.65	1.30
1000	2.08	1.29
1150	3.14	1.23
1500	9.09	1.17
1700	15.41	1.23
7500	16.05	1.21
10000	22.72	1.09
11000	27.08	1.14
15000	26.55	1.69
20000	23.16	1.64
40000	29.60	8.07

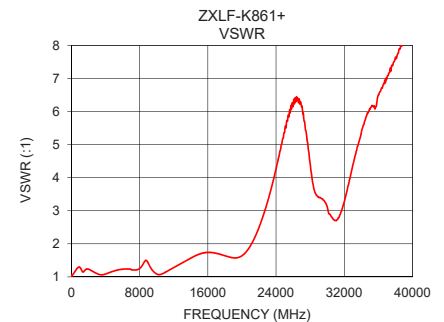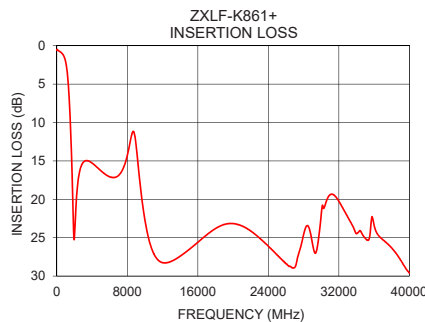

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

PORT - 1	2.92mm-Female
PORT - 2	2.92mm-Female

Outline Drawing



Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F
.68	.60	.39	.200	.10	.400
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K	Wt.	
.24	.070	.22	.30	grams	
6.0	1.78	5.5	7.6	24	

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Coaxial Reflectionless Low Pass Filter

ZXLF-K861+

Typical Performance Data

FREQ.	Insertion Loss	Input Return Loss	Output Return Loss	FREQ.	Group Delay
(MHz)	(dB)	(dB)	(dB)	(MHz)	(ns)
1	0.55	35.34	35.59	1	0.36
5	0.52	36.17	36.08	50	0.35
10	0.52	35.93	36.08	60	0.35
15	0.53	35.74	35.97	70	0.35
25	0.53	35.54	35.67	80	0.35
50	0.48	36.48	36.56	90	0.35
100	0.56	33.59	33.70	100	0.35
150	0.62	30.77	30.84	110	0.35
220	0.66	27.99	28.09	120	0.34
310	0.73	25.09	25.17	130	0.34
370	0.77	23.58	23.76	140	0.34
450	0.84	21.95	22.09	150	0.34
500	0.89	21.13	21.28	160	0.34
570	0.96	20.11	20.23	170	0.34
620	1.03	19.46	19.64	180	0.34
650	1.07	19.17	19.35	190	0.34
700	1.15	18.67	18.82	200	0.34
750	1.24	18.23	18.43	210	0.34
860	1.52	17.85	17.91	220	0.34
900	1.65	17.74	17.88	230	0.34
1000	2.08	18.03	18.11	240	0.34
1100	2.72	18.93	18.95	250	0.34
1150	3.14	19.73	19.72	260	0.34
1500	9.09	22.05	21.95	270	0.35
1600	11.94	20.70	20.65	280	0.35
1700	15.41	19.84	19.76	290	0.35
2000	24.98	19.64	19.37	300	0.35
3000	15.19	26.44	25.02	310	0.35
4000	15.28	27.79	27.85	320	0.35
4500	15.76	24.15	24.25	330	0.35
5000	16.28	21.77	21.78	340	0.35
5200	16.48	21.16	20.91	350	0.35
5500	16.74	20.36	20.03	360	0.35
5800	16.97	19.85	19.47	370	0.35
6000	17.07	19.74	19.26	380	0.35
6200	17.12	19.52	18.96	390	0.35
6500	17.16	19.44	18.90	400	0.35
7000	16.90	19.82	19.34	410	0.35
7300	16.48	20.50	20.28	420	0.35
7500	16.05	20.51	20.64	430	0.35
7900	14.73	19.64	20.30	440	0.35
8000	14.27	19.10	19.94	450	0.35
8100	13.77	18.36	19.28	460	0.36
8500	11.57	15.07	15.53	470	0.36
9000	13.00	15.13	14.74	480	0.36
9200	15.23	17.13	16.54	490	0.36
9500	18.52	20.80	19.92	500	0.36
10000	22.72	27.51	27.58	510	0.36
10500	25.46	28.61	31.47	520	0.36
11000	27.08	23.97	24.00	530	0.36
12000	28.27	18.18	17.34	540	0.36
13000	28.06	15.16	14.34	550	0.36
14000	27.41	13.14	12.82	560	0.36
15000	26.55	11.84	12.30	570	0.36
16000	25.60	11.37	12.80	580	0.37
17000	24.63	11.61	14.38	750	0.39
18000	23.81	12.30	15.84	800	0.40
19000	23.29	13.00	13.58	820	0.41
20000	23.16	12.34	9.88	850	0.41
40000	29.60	2.16	2.95	860	0.41







P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS


REV. OR
ZXLF-K861+
201130
Page 1 of 1

Typical Performance Curves

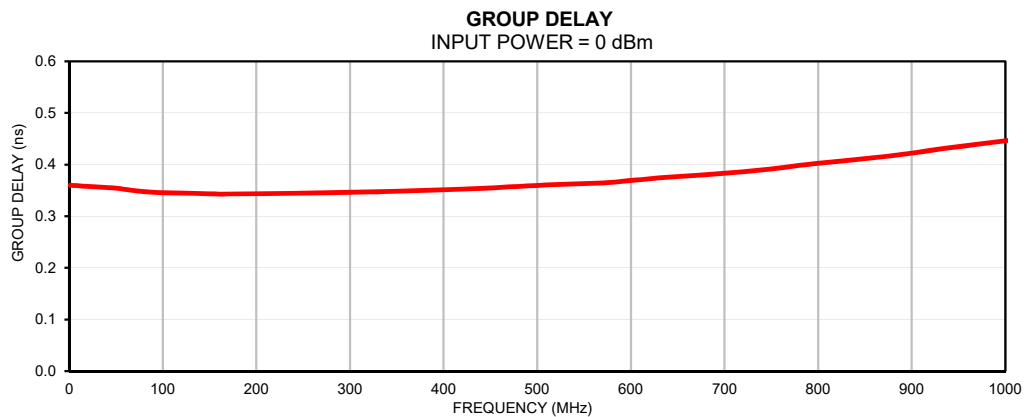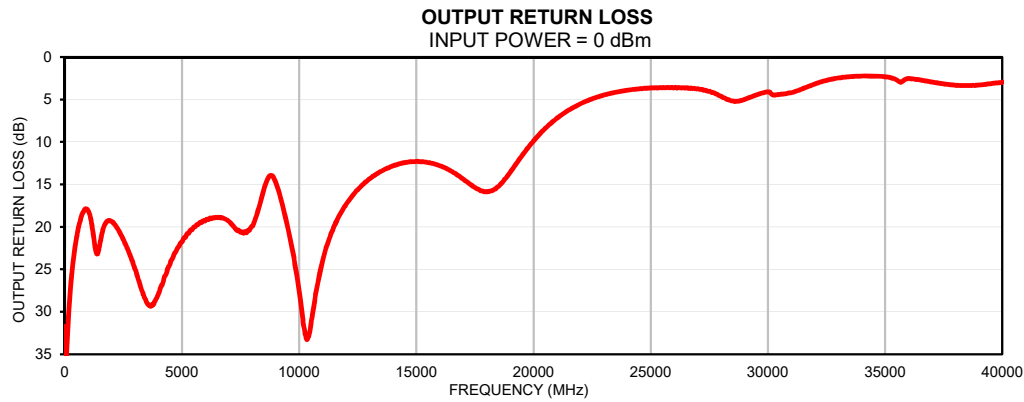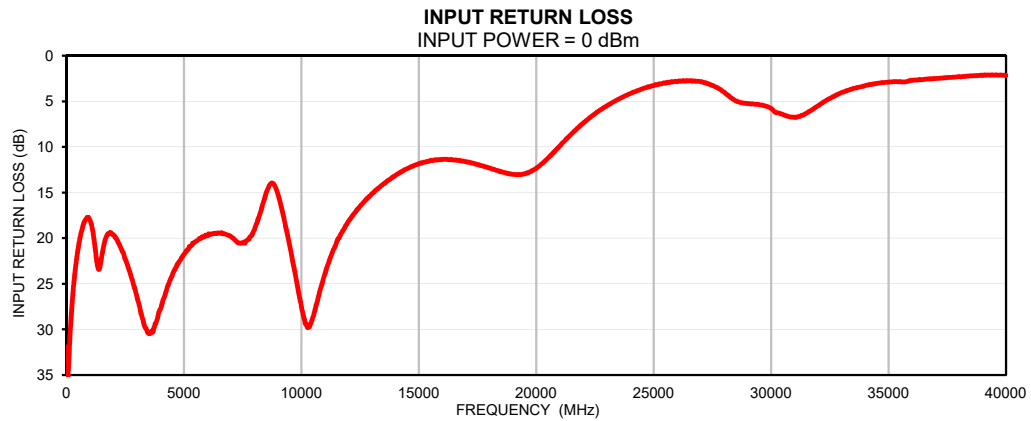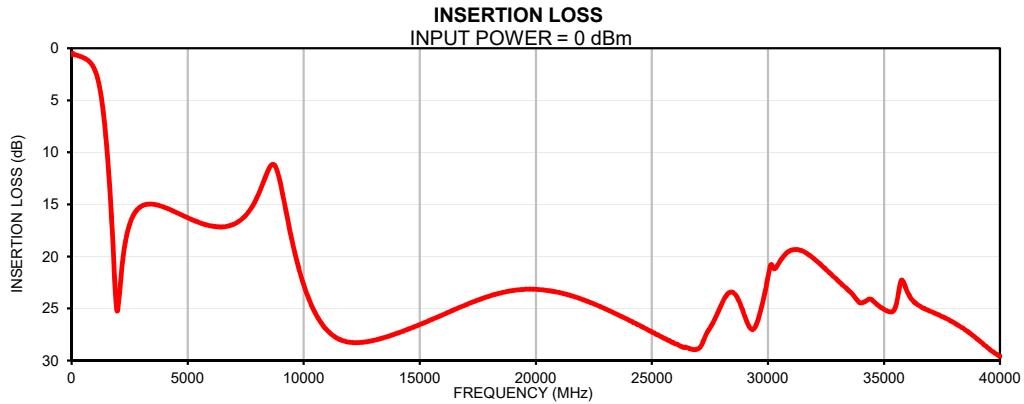

Outline Dimensions

UK3042

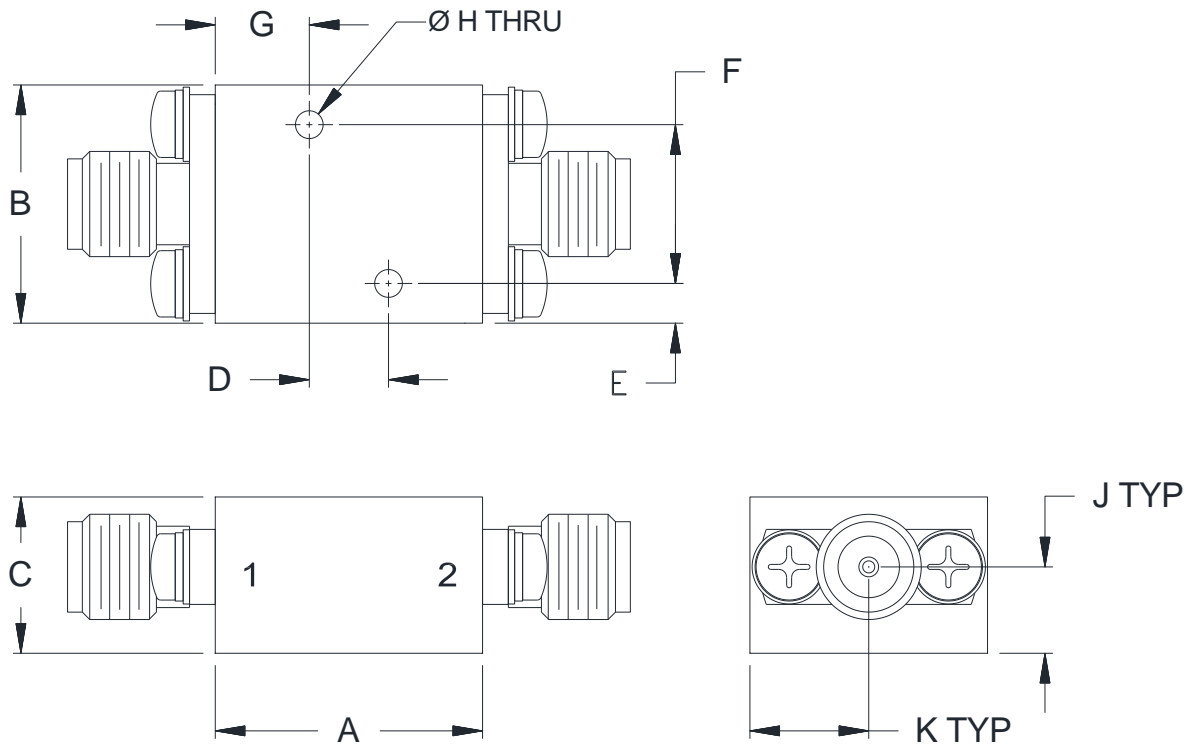

CASE#	A	B	C	D	E	F
UK3042	.68 (17.1)	.60 (15.2)	.39 (10.0)	.200 (5.08)	.10 (2.5)	.400 (10.16)

CASE#	G	H	J	K	WT.GRAMS
UK3042	.24 (6.0)	.070 (1.78)	.22 (5.5)	.30 (7.6)	24

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .050$; 3 Pl. $\pm .015$

Notes:

1. Case material: Brass alloy.
2. Case Finish:
 - a. Case & Cover of the units –Gold plating.
3. Refer to the individual model data sheet for the type of connectors available.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 105°C Ambient Environment	Individual Model Data Sheet