


### Outline Dimensions

#### Top View

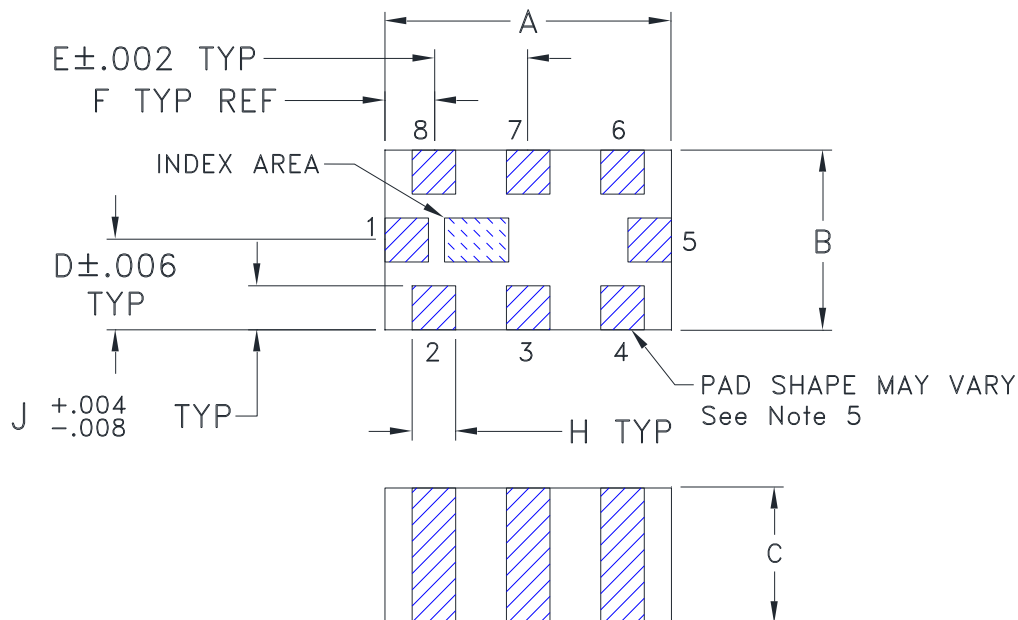

CASE#	A	B	C	D	E	F	G	H	J	WT, GRAM
GE0805C-15	.079 (2.00)	.049 (1.25)	.037 (0.95)	.025 (0.63)	.026 (0.65)	.014 (0.35)	.110 (2.80)	.012 (0.30)	.010 (0.25)	.008

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01(.25)$ ; 3 Pl.  $\pm .005(.100)$

#### Notes:

- Open style, ceramic base
- Termination finish: For RoHS Case Styles: Tin plate over Nickel plate. All model , (+) suffix.  
For RoHS-5 Case Styles: Tin-lead plate over Nickel plate. All model ,no (+) suffix.
- Pad tolerance to be non-cumulative. Minimum spacing between each pad is .004(0.1).
- Pin numbers do not appear on unit. For reference only.
- During the manufacturing process, the pad shape may not be rectangular and may take on a more semi-circle shape. However, the pad dimensions reflect this, with the pad shape being within the specified lengths. The metallization compensates accordingly and so performance will not be affected. In addition, solderability will not be influenced by the pad shape



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified