
THIRD ANGLE PROJECTION

	REVISIONS										
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH						
OR	NP0-004562	NEW RELEASE	AUG 24	SS	VR						

SUGGESTED MOUNTING CONFIGURATION FOR CASE STYLE AAZ1482-2

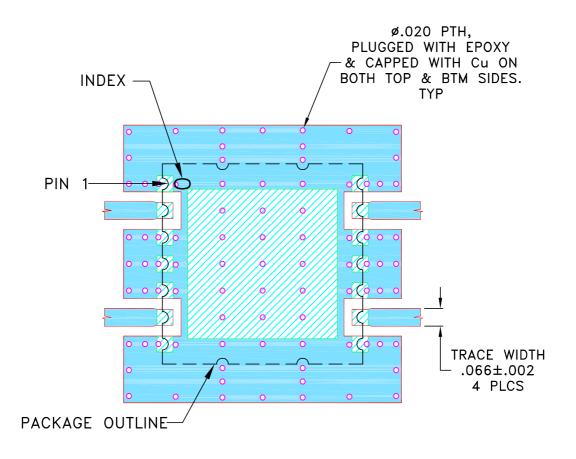

NOTES:

- 1. TRACE WIDTH ARE SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .030±.002. COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE]			• 4 ®			
DIMENSIONS ARE IN INCHES	DRAWN	ss	03 AUG 24	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235						
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	LK	07 AUG 24		Brooklyn NI 11233					
3 PL DECIMALS ± .005	APPROVED	css	08 AUG 24	1						
ANGLES ± FRACTIONS ±				PL DWG, AAZ1482-2, TB-1276						
☐ Mini−Circuits ®										
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					code ident 15542	DRAWING NO: 98-PL-790		REV:		
					3-PL-790	SCALE: 2.7:1	SHEET: 1	OF 1		