



THIRD ANGLE PROJECTION		REVISIONS				
	REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
	OR	NP0-005134	NEW RELEASE	MAR 25	SPM	VR

SUGGESTED MOUNTING CONFIGURATION
FOR BAT3582-1 CASE STYLE

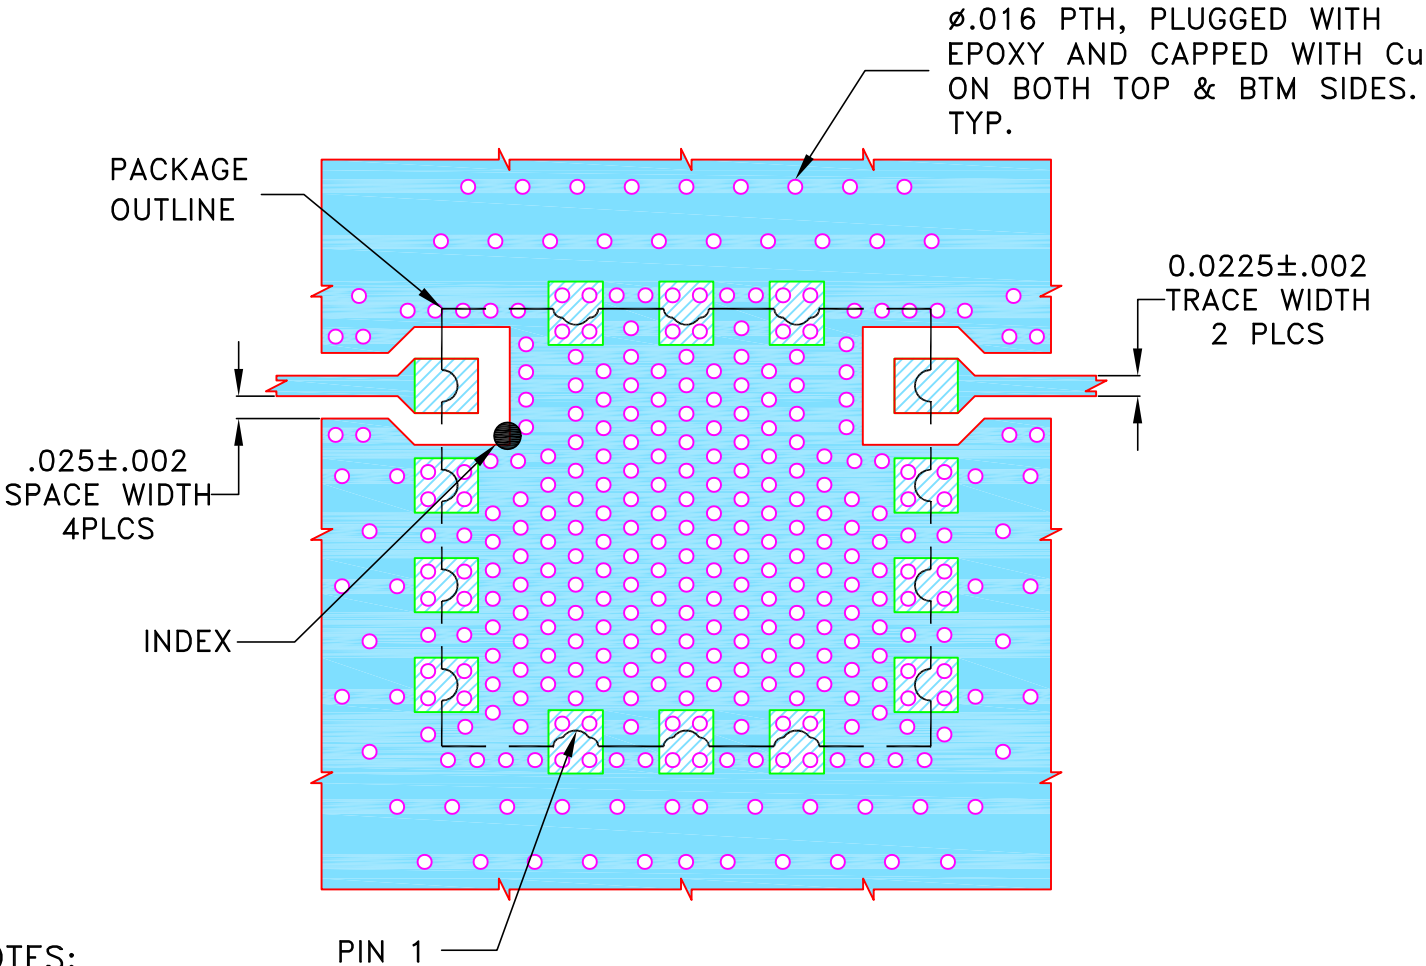

NOTES:

- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS $.010 \pm .001$; COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER PATTERN WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES PCB COPPER PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235				
DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .002 ANGLES ± FRACTIONS ± 	DRAWN	SPM	29 MAR 25					
	CHECKED	LK	31 MAR 25					
	APPROVED	NK	31 MAR 25					
Mini-Circuits® THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.				PL, BAT3582-1, TB-1302				
SIZE A		CODE IDENT 15542	DRAWING NO: 98-PL-818				REV: OR	
FILE: 98-PL-818		SCALE: 4.5:1	SHEET: 1 OF 1					
ASHEETA1.DWG REV:A DATE:01/12/95								