

THIRD ANGLE PROJECTION



REVISIONS					
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	NPO-006345	NEW RELEASE	JUL 26	PS	VR

SUGGESTED MOUNTING CONFIGURATION FOR BCE3840 CASE STYLE

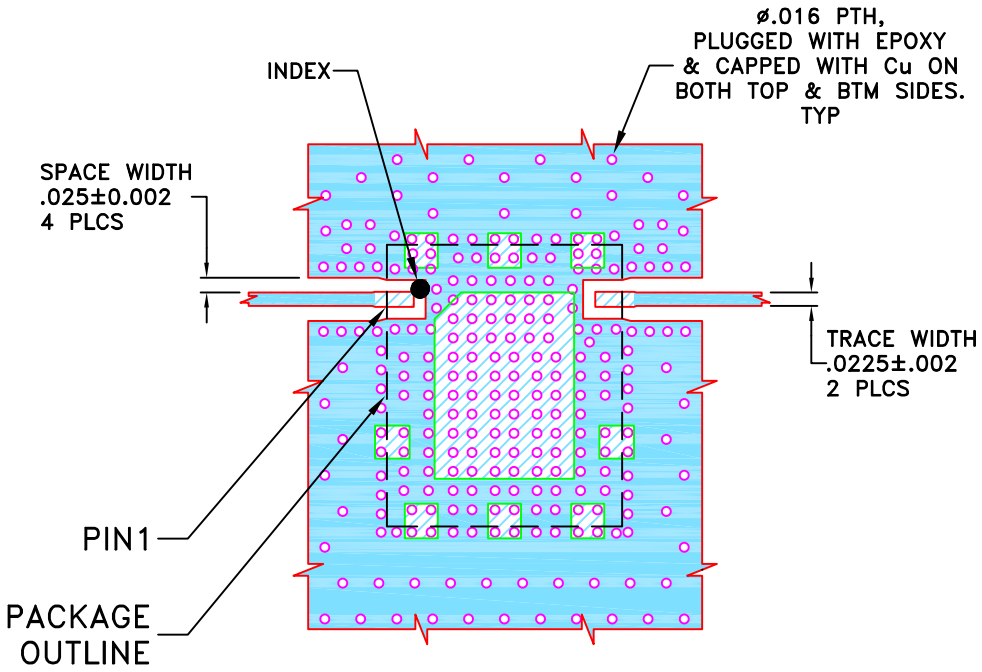

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .010±.001. COPPER: 1/2 Oz. EACH SIDE.
   FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

UNLESS OTHERWISE SPECIFIED		INITIALS	DATE
DIMENSIONS ARE IN INCHES	DRAWN	PS	07 JUL 26
TOLERANCES ON:	CHECKED	MD	07 JUL 26
2 PL DECIMALS ± .005	APPROVED	CSS	07 JUL 26
3 PL DECIMALS ±			
ANGLES ±			
FRACTIONS ±			

Mini-Circuits ®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

Mini-Circuits®
13 Neptune Avenue
Brooklyn NY 11235

PL DWG, BCE3840, TB-1345

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-875	OR

FILE:	SCALE:	SHEET:
98-PL-875	3:1	1 OF 1