


NON-CATALOG

Surface Mount

Diplexer

DPB204258-75+

75Ω DC to 1220 MHz
(DC-204, 258-1220 MHz)



CASE STYLE: PA2002

The Big Deal

- Low insertion loss, 0.9dB Typ.
- High rejection, > 50dB
- Very good return loss, 22dB Typ.
- 75Ω Impedance
- Used in DOCSIS 3.1 standard

Product Overview

DPB204258-75+ is a high performance diplexer with the lowpass port at DC-204 MHz and highpass port at 258-1220 MHz. Excellent return loss combined with high out of channel rejection makes it a ideal component in cable TV and multiband radio systems.

Key Features

Feature	Advantages
Low passband insertion loss	Passband insertion loss 1dB ensures low signal loss through both the channels.
Excellent Stopband rejection	Co-channel rejection of 50dB ensures unwanted spurious are eliminated.
Excellent return loss at DC-204 and 258-1220 MHz	This makes signal transmission with very less rejection and well-matched with the adjacent component used in the system.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Surface Mount Diplexer

NON-CATALOG

DPB204258-75+

75Ω DC to 1220 MHz (DC-204, 258-1220 MHz)



CASE STYLE: PA2002

Maximum Ratings

Operating Temperature	-40° to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	30dBm Max.

Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation

Pin Connections

HIGH PASS PORT	7
LOW PASS PORT	9
COMMON PORT	18
GROUND	1-6,8,10-17,19,20

Features

- Low insertion loss
- 75Ω Impedance
- Excellent return loss
- High rejection

Applications

- Cable TV systems (DOCSIS 3.1 standard)
- Multiband radio systems

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications at 25°C

Parameter	Port	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	Low Pass	DC-204	-	0.9	1.5	dB
		High Pass	258-1220	-	0.8	1.5	
	Return Loss	Low Pass	DC-204	18	22	-	dB
		High Pass	258-1220	17	22	-	
		Common	DC-204	18	22	-	
			258-1220	17	22	-	
Stop Band Isolation	Low Pass	258-1220	45	50	-	dB	
	High Pass	DC-204	45	50	-		

Typical Performance Data at 25°C

FREQUENCY (MHz)	INSERTION LOSS (dB)			RETURN LOSS (dB)	
	Low Pass Port	High Pass Port	Common Port	Low Pass Port	High Pass Port
1	0.05	91.13	50.42	49.61	0.01
5	0.07	81.39	46.61	47.07	0.01
100	0.27	68.22	28.06	27.70	0.12
204	0.87	51.03	29.08	32.38	0.82
215	1.30	31.20	22.25	21.83	1.04
220	1.84	24.43	16.62	14.67	1.28
221	2.03	22.93	15.37	13.31	1.36
225	3.51	15.09	10.47	7.87	1.95
228	6.31	8.98	7.98	4.34	3.14
230	9.46	6.10	7.53	2.78	4.52
234	17.85	3.13	9.11	1.39	8.11
236	22.07	2.44	10.55	1.12	10.01
240	28.90	1.66	13.95	0.85	13.92
242	31.62	1.44	15.82	0.78	15.96
250	42.10	0.97	24.68	0.62	25.25
258	55.20	0.77	33.72	0.54	31.25
260	59.43	0.74	33.18	0.53	30.46
300	74.38	0.45	27.98	0.42	28.66
500	53.15	0.26	30.92	0.14	27.45
700	52.18	0.25	27.06	0.01	28.43
1000	52.11	0.31	21.69	0.09	21.74
1220	51.52	0.31	26.68	0.26	27.11


Outline Drawing

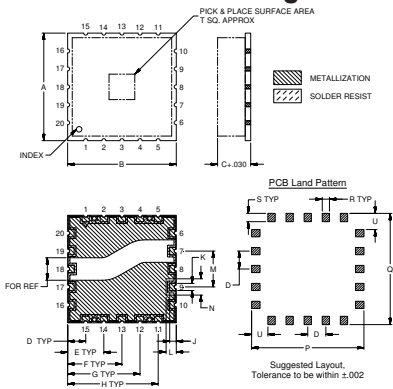


Outline Dimensions (inch/mm)

	A	B	C	D	E	F	G	H	J	K
	1.181	1.181	.300	.197	.394	.591	.787	.984	.071	.079
	30.00	30.00	7.62	5.00	10.00	15.00	20.00	25.00	1.80	2.00
	L	M	N	P	Q	R	S	T	U	Wt.
	.111	.394	.179	1.221	1.221	.079	.091	.280	.178	grams
	2.82	10.00	4.54	31.01	31.01	2.01	2.31	7.11	4.52	3.8

Demo Board MCL P/N: TB-786+ Suggested PCB Layout (PL-435)

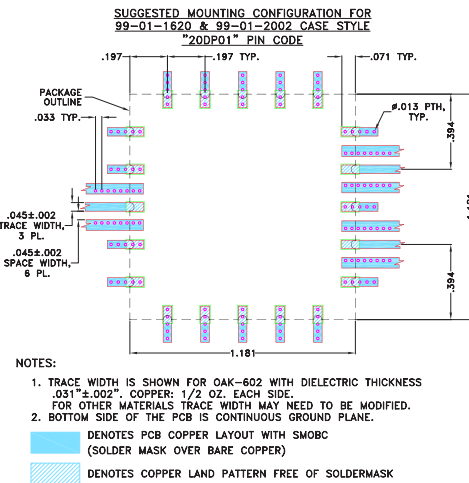


Functional Schematic

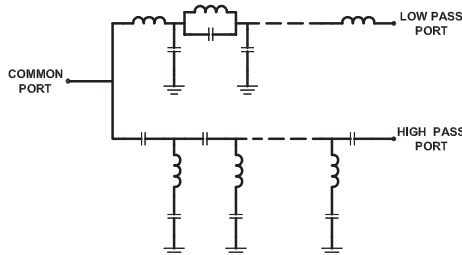


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp


**DPB204258-75+ LOW PASS PORT
INSERTION LOSS (P_{in}=0dBm)**

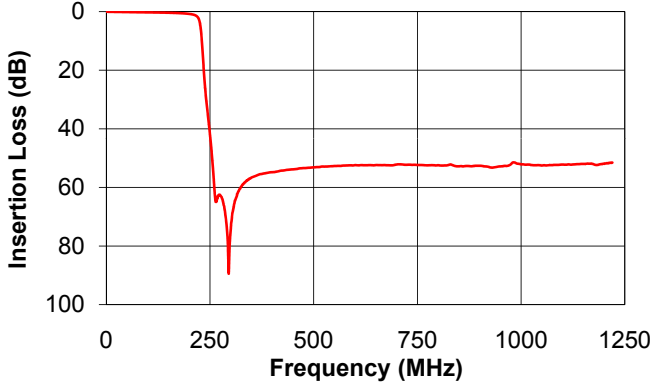


**DPB204258-75+ HIGH PASS PORT
INSERTION LOSS (P_{in}=0dBm)**

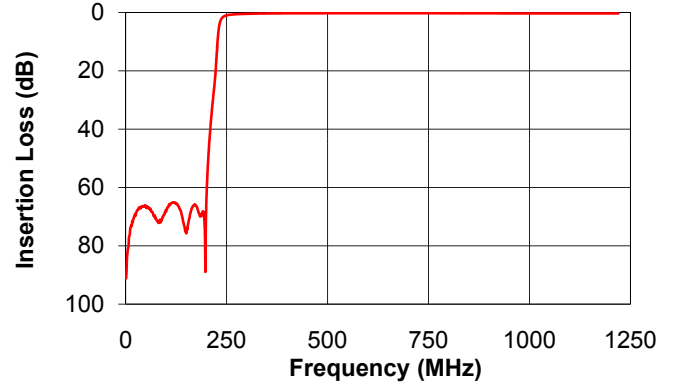


**DPB204258-75+ LOW PASS PORT
RETURN LOSS (P_{in}=0dBm)**

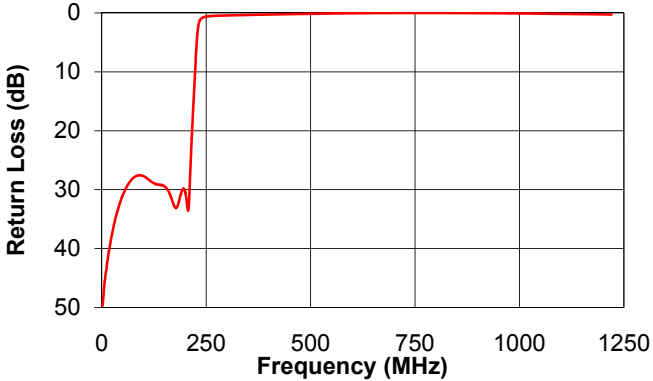

**DPB204258-75+ HIGH PASS PORT
RETURN LOSS (P_{in}=0dBm)**

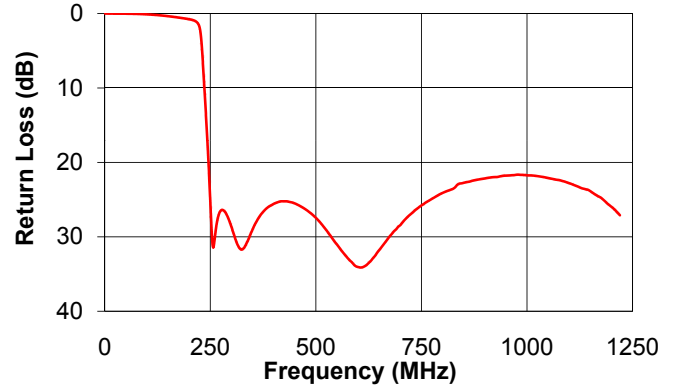

**DPB204258-75+ COMMON PORT
RETURN LOSS (P_{in}=0dBm)**

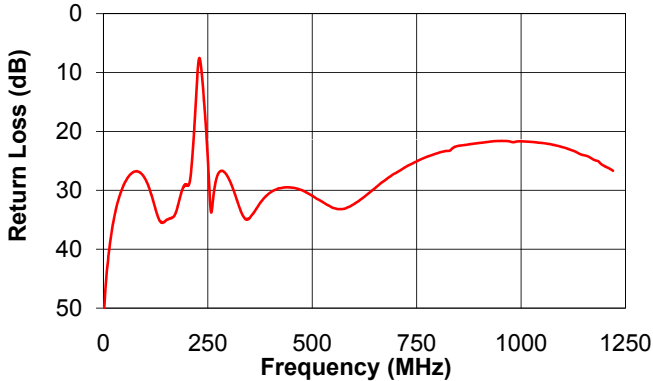

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp