



## COAXIAL

Directional Coupler **ZCDC10-01263-1+**

50Ω 10 dB Up to 20 W 1 to 26.5 GHz SMA Female

## KEY FEATURES

- Wideband frequency range, 1 to 26.5 GHz
- Excellent coupling flatness,  $\pm 0.4$  dB typ.
- Excellent directivity, 21 dB typ. up to 26.5 GHz
- Excellent return loss, 26 dB typ. up to 26.5 GHz
- Power handling up to 20 W
- DC current pass through input to output

## APPLICATIONS

- 5G
- Mobile
- Fixed satellite
- Lab use

## PRODUCT OVERVIEW


The Mini-Circuits ZCDC10-01263-1+ wideband directional coupler offers exceptional performance operating over 1 to 26.5 GHz. This coupler has excellent coupling flatness, directivity, and power handling. It is ideal for lab testing applications as well as for power monitoring over wide bands, among other applications.

The ZCDC10-01263-1+ is identical to Mini-Circuits model ZCDC10-01263-S+, except for additional testing performed at Anritsu-specified data points (TD-3). Test data is provided with units for customer use with the Anritsu MS2840A Signal Analyzer Pulsed Radar Measurement Function (MX284059B). See page 2 for further information.



Generic photo used for illustration purposes only

## FUNCTIONAL DIAGRAM

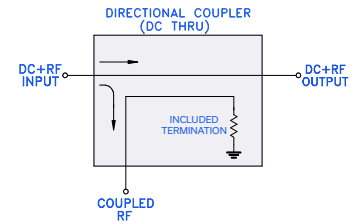

## ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range	-	1	-	26.5	GHz
Mainline Loss <sup>1</sup>	1 - 8	-	0.3	1.2	dB
	8 - 18	-	0.6	1.5	
	18 - 26.5	-	0.9	1.8	
Coupling Nominal	1 - 26.5	-	10 $\pm$ 1.2	-	dB
Coupling Flatness ( $\pm$ )	1 - 26.5	-	0.4	0.8	dB
Directivity	1 - 8	16.0	31	-	dB
	8 - 18	14.0	24	-	
	18 - 26.5	12.5	21	-	
Return Loss (Input & Output)	1 - 8	15.6	36	-	dB
	8 - 18	14.0	24	-	
	18 - 26.5	12.7	26	-	
Return Loss (Coupled)	1 - 8	15.6	30	-	dB
	8 - 18	14.0	22	-	
	18 - 26.5	12.7	22	-	
Input Power <sup>2</sup>	-	-	-	20	W

1. Mainline loss includes coupling loss.

2. Up to 25 °C, derates linearly to 10 W at 100 °C.

ABSOLUTE MAXIMUM RATINGS<sup>3</sup>

Operating Case Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
Supplied Termination <sup>4</sup>	1 W
DC Current	0.6 A

3. Permanent damage may occur if any of these limits are exceeded.

4. At +25°C derate linearly to 325 mW at +100°C.

REV OR  
ECO-023121  
ZCDC10-01263-1+  
MCL NY  
240920








**COAXIAL**

# Directional Coupler **ZCDC10-01263-1+**

50Ω 10 dB Up to 20 W 1 to 26.5 GHz SMA Female

**TYPICAL PERFORMANCE GRAPHS**

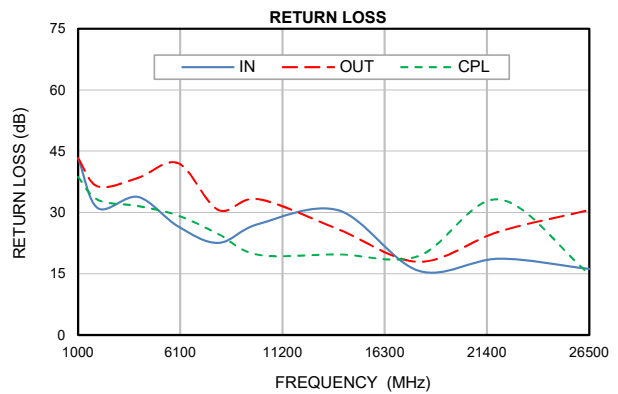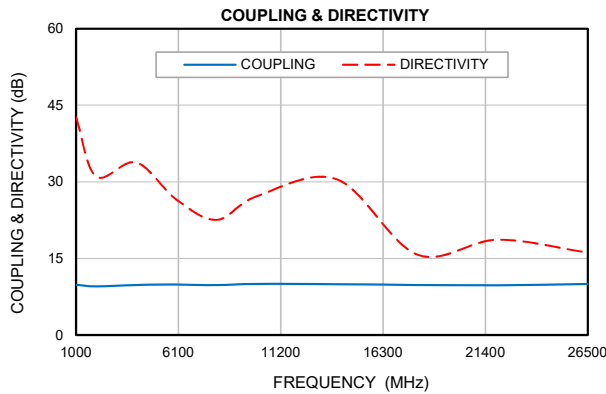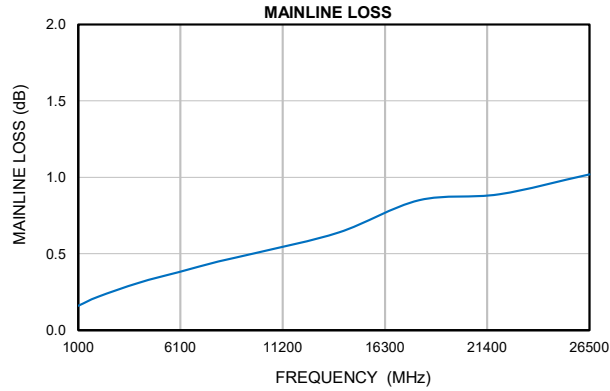

**FREQUENCIES & POINTS OF SERIALIZED DATA (TD-3) INCLUDED WITH PRODUCT\***

Frequency (GHz)	Step Size (GHz)	Number of Points
0.01 - 0.1	0.01	10
0.2 - 1	0.1	9
2 - 4	1	3
5.5 - 6	0.5	2
7 - 9	1	3
9.5 - 10	0.5	2
10 - 14	2	3
15 - 25	5	3
26 - 26.5	0.5	2

\*Tested parameters: Mainline loss, directivity, coupling, return loss (all points).





**COAXIAL**


# Directional Coupler **ZCDC10-01263-1+**

50Ω 10 dB Up to 20 W 1 to 26.5 GHz SMA Female

**COAXIAL CONNECTIONS**

Ports	Marking
Input	IN
Output	OUT
Coupled	CPL
Termination (50Ω) Included	TERM

**CASE STYLE DRAWING**

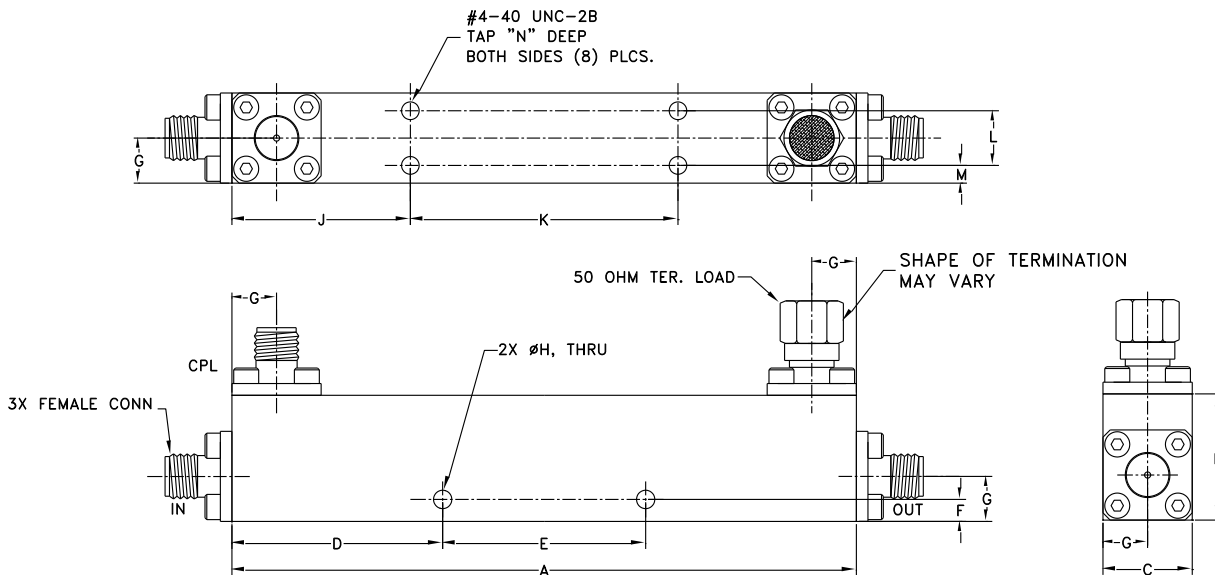

CASE #	A	B	C	D	E	F	G	H	J	K
HT2679	3.50 (88.90)	.70 (17.78)	.50 (12.70)	1.181 (30.00)	1.138 (28.90)	.122 (3.10)	.25 (6.35)	.102 (2.60)	1.000 (25.40)	1.500 (38.10)

CASE #	L	M	N	WT.GRAM
HT2679	.303 (7.70)	.098 (2.50)	.20 (5.08)	80

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

**PRODUCT MARKING\*:** ZCDC10-01263-S+

\*Marking may contain other features or characters for internal lot control.





COAXIAL

# Directional Coupler **ZCDC10-01263-1+**

50Ω 10 dB Up to 20 W 1 to 26.5 GHz SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD [CLICK HERE](#)

Performance Data & Graphs	Data Graphs S3P & TD-3 Data Set (.zip file)
Case Style	HT2679
Connectors	SMA Female
RoHS Status	Compliant
Environmental Ratings	ENV28

#### NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

