

Surface Mount Directional Coupler

NON-CATALOG

D17I+

50Ω 2300 to 2600 MHz

Not Recommended For New Designs
Recommended Replacement Part:
D17IA+



CASE STYLE: CA531-1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	4
OUTPUT	6
COUPLED	3
GROUND	1,2,5

Features

- low mainline loss, 0.3 dB typ.
- excellent VSWR, 1.2:1 typ.
- excellent repeatability
- miniature low profile package
- aqueous washable

Applications

- WLAN
- WiMAX
- Aeronautical

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)	MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ² (W)
		Typ.	Max.	Typ.	Min.		
2300-2600	18.2±1.3	0.5	0.8	14	9	1.3	1.0

1. Mainline loss includes theoretical power loss at coupled port.
2. 4W CW when operating with a 2.0:1 maximum VSWR on all ports at 25°C.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
2300.00	0.30	18.72	17.37	37.17	37.46	22.94
2400.00	0.32	18.40	17.11	35.65	36.45	22.12
2440.00	0.33	18.28	17.05	36.10	36.80	21.93
2460.00	0.33	18.23	17.08	35.73	37.51	21.74
2480.00	0.33	18.16	17.05	34.79	37.40	21.55
2500.00	0.33	18.10	16.93	34.49	36.89	21.39
2540.00	0.35	17.99	16.76	35.20	36.35	21.20
2560.00	0.35	17.94	16.81	35.68	36.80	21.06
2580.00	0.35	17.88	16.80	35.01	37.11	20.87
2600.00	0.35	17.82	16.70	34.48	36.62	20.68


Outline Drawing

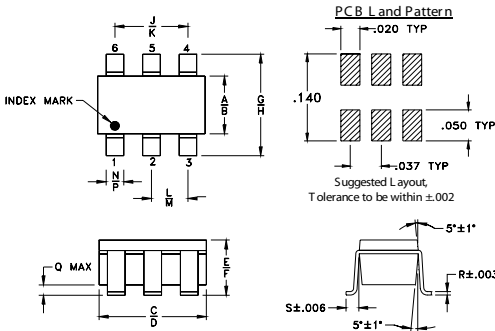

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

Demo Board MCL P/N: TB-396+ Suggested PCB Layout (PL-270)



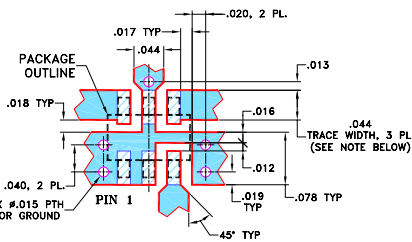


- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

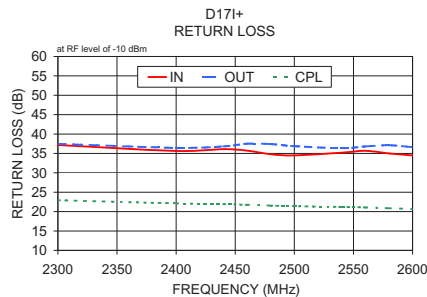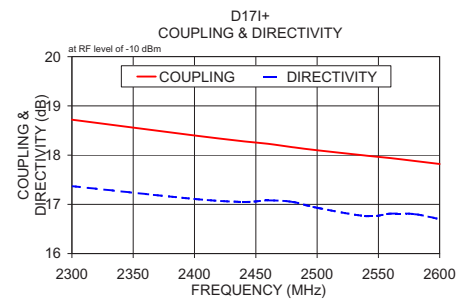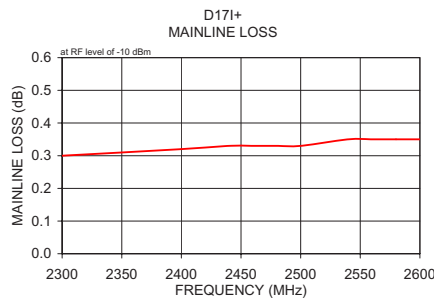

Electrical Schematic

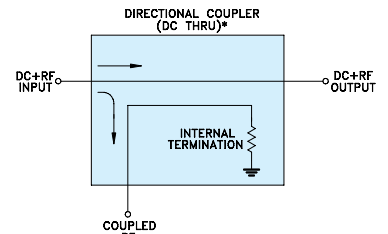

* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.