

# Ceramic Low Pass Filter

50Ω DC to 1350 MHz

## LFTC-1350+



Generic photo used for illustration purposes only

CASE STYLE: FR933

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000
13"	2000, 3000, 4000

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C


Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN	2
RF OUT	5
GROUND	1,3,4,6

### Product Marking: LF1


### Outline Drawing

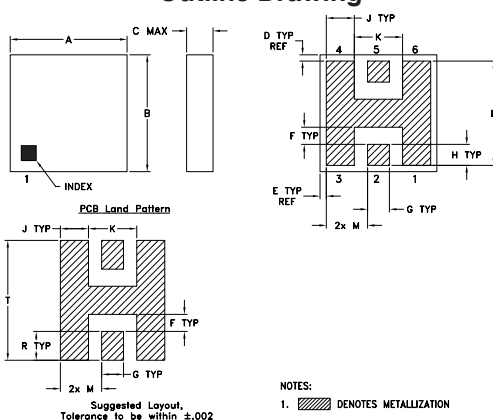

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.150	.150	.034	.008	.022	.028	.027	
3.81	3.81	0.864	0.203	0.203	0.559	0.711	0.686
J	K	L	M	R	T		wt
.036	.062	.134	.053	.037	.154		grams
0.914	1.575	3.404	1.346	0.940	3.912		0.15

### Demo Board MCL P/N: TB-233 Suggested PCB Layout (PL-112)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- miniature size, 0.15"X0.15"X0.034"
- low profile, 0.034" height
- excellent power handling, 15W
- hermetically sealed

### Applications

- harmonic rejection
- internal rejection
- receivers & transmitters


### Electrical Specifications<sup>1</sup> (T<sub>AMB</sub>=25°C)

PASSBAND (MHz)	f <sub>co</sub> , MHz Nom.	STOP BAND (MHz)	fr20 dB	VSWR (:1) Passband	POWER INPUT* (W)	MARKING	NO. OF SECTIONS
(loss < 1 dB)	(loss 3 dB)	( > 20 dB)	(loss > 30 dB)	Typ.			
Typ.	Typ.	Typ.	Typ.	Typ.			
DC-1350	1550	2100	2700-4500	7000	1.2	15	LF1


\* Derate linearly to 7W at 100°C ambient.

1. Measured on Mini-Circuits Characterization Test Board TB-233.

### typical frequency response



### electrical schematic



### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10.00	0.05	1.01
1000.00	0.49	1.12
1350.00	0.72	1.11
1550.00	1.53	1.89
1700.00	5.16	5.81
2100.00	20.75	39.56
2700.00	45.01	62.90
4000.00	38.83	52.45
7000.00	16.02	7.35
8000.00	9.31	7.38

