

Surface Mount Attenuator/Switch

RAS-2-75+ RAS-2-75

75Ω Bi-Phase 10 to 1000 MHz



CASE STYLE: TT241
PRICE: \$9.95 ea. QTY. (1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Control Current	30mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	4
OUTPUT	1
CONTROL	5
GROUND	2,3,6

Outline Drawing

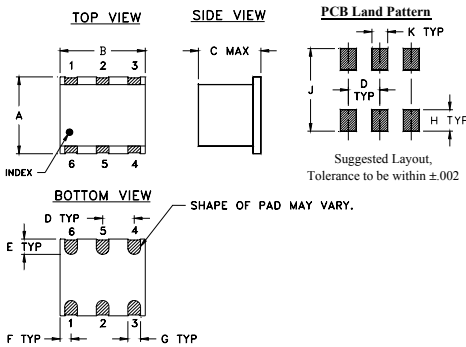

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.275	.100	.050	.055
6.35	7.87	6.99	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

Features

- wideband, 10 to 1000 MHz
- excellent phase and amplitude unbalance

Applications


- bi-phase modulator

Attenuator/Switch Electrical Specifications


FREQUENCY (MHz)	INSERTION LOSS (dB) ±20 mA	MAX. INPUT PWR (dBm) ±20 mA	IN-OUT ISOLATION (dB) 0 mA			BI-PHASE X̄ (±20 mA) Typ.	
			L	M	U	ΔAMP (dB)	Phase (deg.) deviation from 180°
10-1000	DC-0.05	20 25	58 40 42	28 39 20	0.15 0.3	1.5 3.0	

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U] m = [$2 f_L$ to $f_U/2$]
Performance specifications apply for input power up to 10 dB below stated 1 dB compression.

suggested control port biasing configuration



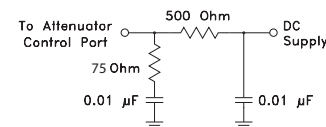


electrical schematic

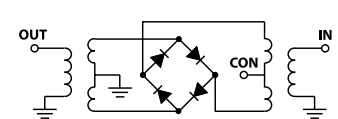

Typical Performance Data

Freq. (MHz)	I. Loss (dB) at 20mA	±Control ΔAMP (dB)	20mA ΔPhase (deg.)	Isolation (dB) (in-con)		Input R. Loss (dB)	Control Current (mA)	Attenuation (dB)			Phase Δ ref at 15mA Ctrl deg.			Input VSWR			
				10 MHz	500 MHz			1000 MHz	10 MHz	500 MHz	1000 MHz	10 MHz	500 MHz	1000 MHz			
10.0	3.85	0.03	0.02	179.9	68	41	10.1	0.0000	72.9	42.4	27.4	77.0	123.7	-103.5	2.1	3.1	3.1
11.1	3.82	0.03	0.02	179.9	68	40	10.2	0.0003	55.2	42.7	27.4	11.3	120.0	-102.9	2.1	3.1	3.1
18.9	3.74	0.03	0.02	179.9	63	36	10.6	0.0005	53.2	42.9	27.5	7.8	118.9	-102.6	2.1	3.1	3.1
20.0	3.74	0.03	0.02	180.0	63	35	10.7	0.0012	51.4	43.0	27.5	3.9	117.5	-102.4	2.1	3.1	3.1
31.6	3.76	0.02	0.02	180.0	60	31	10.7	0.0020	48.6	43.5	27.5	-0.2	112.3	-101.5	2.1	3.1	3.1
88.8	3.89	0.03	0.02	179.9	51	23	10.3	0.0057	43.1	45.3	27.5	1.3	90.0	-98.1	2.1	3.1	3.0
100.0	3.92	0.03	0.02	179.9	50	22	10.2	0.0100	39.5	44.9	27.5	3.7	57.7	-94.3	2.0	3.1	3.0
249.1	4.03	0.04	0.03	179.8	42	16	8.9	0.0159	36.4	42.4	27.5	5.1	30.2	-89.7	2.0	3.1	3.0
297.8	4.07	0.05	0.03	179.8	41	15	8.5	0.0285	31.8	36.4	27.2	6.5	7.1	-79.2	2.0	3.0	2.9
417.3	4.11	0.07	0.05	179.6	38	15	7.9	0.0446	28.2	32.0	26.8	7.2	-1.1	-68.6	1.9	2.9	2.8
498.9	4.00	0.08	0.06	179.2	37	16	7.9	0.0715	24.6	27.7	25.4	7.4	-5.8	-54.2	1.8	2.8	2.7
596.4	3.94	0.09	0.08	178.5	37	18	8.5	0.1020	21.8	24.5	23.6	7.5	-7.7	-43.6	1.7	2.7	2.6
699.0	3.81	0.10	0.11	177.8	36	20	10.0	0.1879	17.4	19.7	20.0	7.0	-9.0	-27.2	1.5	2.5	2.4
756.8	3.86	0.12	0.11	177.5	36	19	11.1	0.3050	14.2	16.2	16.9	6.3	-8.9	-17.7	1.4	2.3	2.2
787.4	3.89	0.14	0.15	177.4	35	18	12.0	0.4255	12.2	14.0	14.9	5.7	-8.5	-12.5	1.2	2.1	2.0
887.0	4.40	0.24	0.24	176.4	35	13	13.7	0.7057	9.7	11.2	12.3	4.5	-7.4	-6.6	1.1	2.0	1.8
941.4	4.82	0.31	0.39	175.6	35	11	15.6	0.9950	8.3	9.6	10.9	3.7	-6.6	-3.4	1.2	1.9	1.6
979.5	5.15	0.36	0.39	175.1	35	9	15.2	1.7446	6.5	7.4	9.2	2.5	-4.9	0.2	1.4	1.8	1.5
999.1	5.30	0.38	0.40	175.0	35	9	14.5	5.6985	4.4	4.8	7.6	0.6	-1.6	1.8	1.8	1.8	1.2
1019.2	5.47	0.41	0.45	175.1	35	8	13.8	15.0090	3.7	3.9	7.3	0.0	0.0	0.1	2.1	1.9	1.1

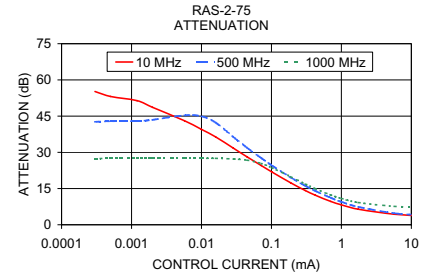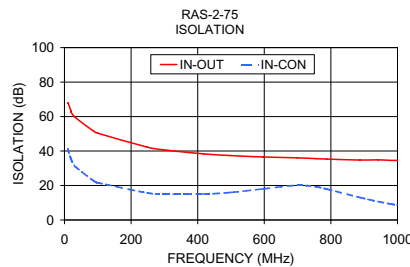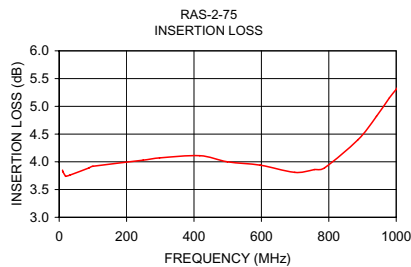

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

