

NON-CATALOG

Surface Mount

Voltage Controlled Oscillator

ROS-1435PV

5V Tuning for PLL IC's 1375 to 1435 MHz



CASE STYLE: CK605
PRICE: Contact Sales Dept.

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Features

- linear tuning, 20-30 MHz/V typ.
- low phase noise, -121 dBc/Hz at 100 kHz offset typ.
- 5V power supply
- excellent harmonic suppression, -26 dBc typ.
- aqueous washable
- protected by US patent 6,424,241

Applications

- satellite receiver
- PLL circuitry

Electrical Specifications

FREQUENCY (MHz)	POWER OUTPUT (dBm)	TUNING VOLTAGE (V)	PHASE NOISE (dBc/Hz)				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER		
			SSB at offset frequencies: Typ.							Typ.	Typ.		Typ.	Max.	Typ.
Min.	Max.	Typ.	Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Max.	Typ.	Max.	
1375	1435	3	0.5	5.0	-75	-101	-121	-141	4.0	1.7	20-30	-26	-18	5	20

Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+6V
Absolute Max. Tuning Voltage (Vtune)	+6V

all specifications: 50 ohm system
Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

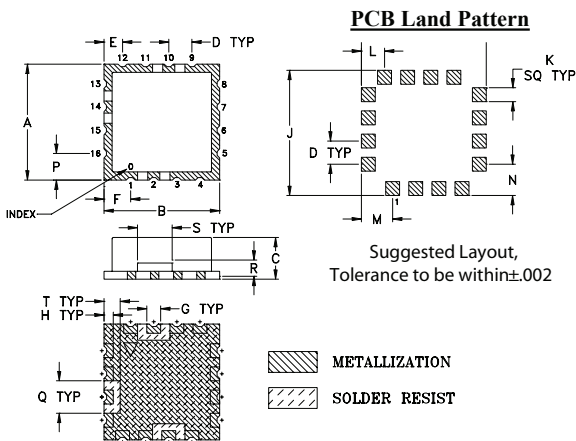

Demo Board MCL PIN: TB-10 Suggested PCB Layout (PL-012)

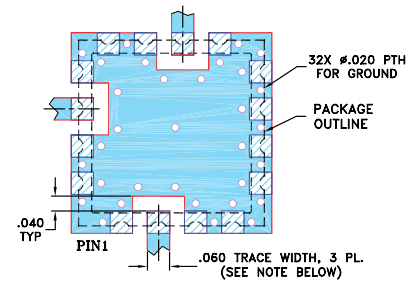

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


For detailed performance specs & shopping online see web site

REV. C
M111708
ED-8347/3
ROS-1435PV
MM/TD/CP/AM
120627
Page 1 of 2



NON-CATALOG

Performance Data & Curves


ROS-1435PV

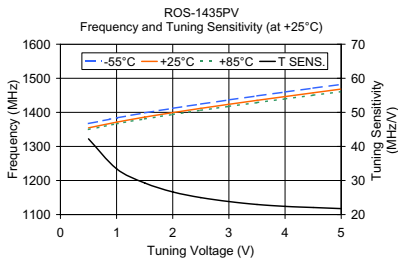

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
0.50	42.22	1367.29	1354.58	1349.90	3.28	3.51	3.35
1.00	33.44	1383.81	1371.29	1366.43	3.53	3.78	3.66
1.50	29.28	1398.46	1385.93	1380.79	3.71	4.01	3.91
2.00	26.65	1411.91	1399.26	1393.87	3.86	4.18	4.11
2.50	24.97	1424.55	1411.74	1406.08	4.00	4.34	4.26
3.00	23.83	1436.65	1423.66	1417.71	4.16	4.49	4.41
3.50	22.97	1448.37	1435.14	1428.89	4.30	4.64	4.57
4.00	22.40	1459.82	1446.34	1439.78	4.40	4.78	4.71
4.50	22.07	1471.14	1457.38	1450.46	4.48	4.88	4.83
5.00	21.75	1482.33	1468.25	1460.97	4.56	4.94	4.93

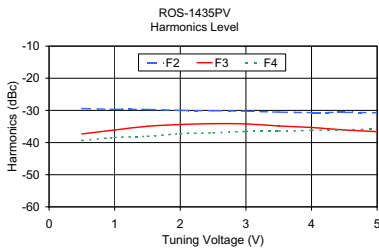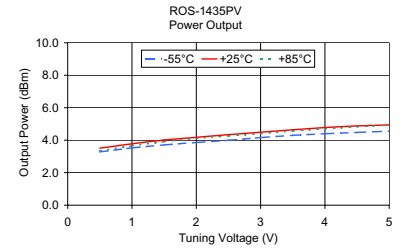

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
0.50	-29.40	-37.32	-39.33	0.78
1.00	-29.64	-36.08	-38.44	1.02
1.50	-29.69	-34.94	-38.04	1.21
2.00	-30.00	-34.40	-37.25	1.30
2.50	-30.09	-34.13	-36.96	1.37
3.00	-30.23	-34.20	-36.53	1.46
3.50	-30.52	-34.84	-36.42	1.51
4.00	-30.67	-35.32	-36.19	1.55
4.50	-30.60	-36.06	-36.00	1.57
5.00	-30.73	-36.62	-35.82	1.57

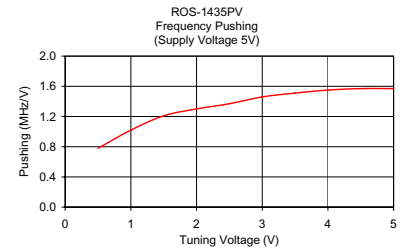

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.