

# Directional Coupler

SCDC-11-2

50Ω 500 to 1100 MHz



CASE STYLE: YY161  
PRICE: Contact Sales Dept

## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

INPUT	1
OUTPUT	2
COUPLED	5
GROUND	4,7,8
ISOLATE (DO NOT USE)	3,6

## Features

- low mainline loss, 1.1 dB typ.
- high directivity, 20 dB typ.
- excellent solderability

## Applications


- communication
- cellular

## Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
500-1100	11.3±0.5	±0.6	1.1	1.8	17	10	1.4	2

1. Mainline loss includes theoretical power loss at coupled port.

## Outline Drawing

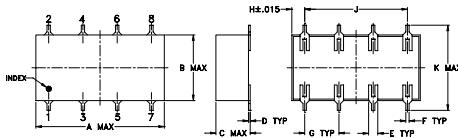

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

## Demo Board MCL P/N: TB-35 Suggested PCB Layout (PL-096)

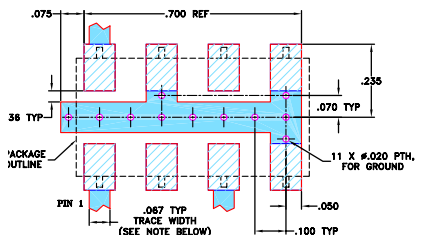


NOTE: TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
500.00	1.05	11.09	18.51	27.31	28.87	25.33
560.00	1.01	11.02	18.38	28.98	31.53	27.85
620.00	1.01	10.96	18.20	27.86	28.16	28.56
680.00	1.02	10.92	17.97	25.86	24.69	27.35
740.00	1.10	10.96	17.70	24.17	22.15	25.73
815.00	1.04	10.83	17.36	22.57	19.92	24.01
890.00	1.06	10.78	16.99	21.50	18.29	22.80
965.00	1.02	10.78	16.58	20.76	17.06	21.98
1040.00	1.11	10.78	16.18	20.30	16.11	21.48
1100.00	1.10	10.66	15.86	20.10	15.49	21.26


SCDC-11-2  
MAINLINE LOSS

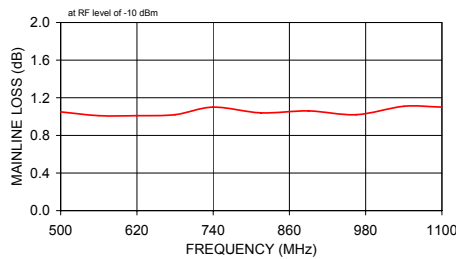


SCDC-11-2  
COUPLING & DIRECTIVITY

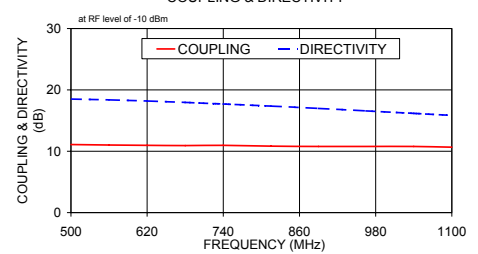

SCDC-11-2  
RETURN LOSS

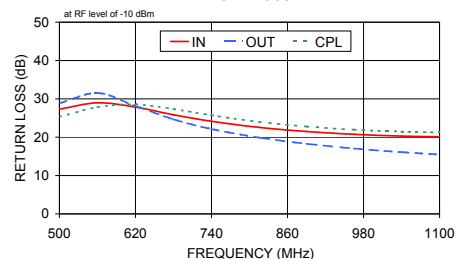

## Electrical Schematic

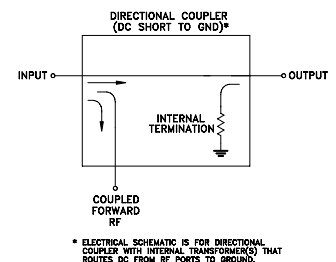

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

