

# NON-CATALOG

Surface Mount

# Voltage Controlled Oscillator

# SOS-1400-219+

5V Tuning for PLL ICs 1355 to 1430 MHz



CASE STYLE: FZ802

### Features

- low phase noise
- low pushing
- small size 0.3" x 0.3"
- aqueous washable

### Applications

- wireless communications
- GPS

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER				
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)		SENSI- TIVITY (MHz/V)	PORT CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Typ.	Typ.	Typ.	Vcc (volts)	Current (mA)
									Min.	Max.												
SOS-1400-219+	1355	1430	+3	-74	-98	-119	-139	0.2	2.8	50-61	30	60	-90	-35	-25	6	3	3	15			

### Pin Connections

RF OUT	8
VCC	11
V-TUNE	1
GROUND	2,3,4,5,6,7,9,10,12

### Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	5V
Absolute Max. Tuning Voltage (Vtune)	5V
All specifications	50 ohm system


Permanent damage may occur if any of these limits are exceeded.

### Tape & Reel: F78


7" Reels with 10, 20, 50, 100 devices  
13" Reels with 200, 500, 1000 devices

### Environmental Ratings: ENV65

### Outline Drawing

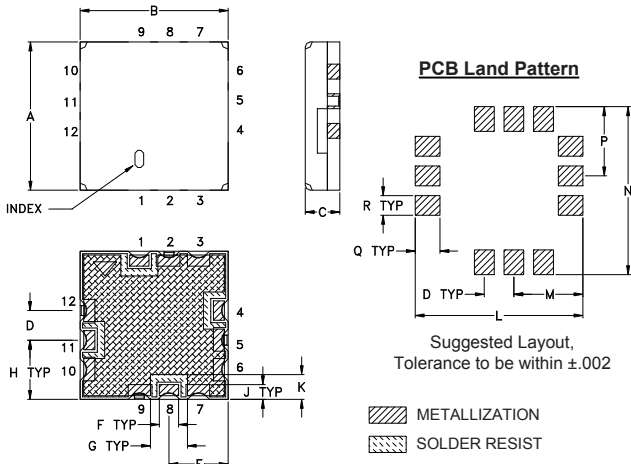

### Demo Board MCL P/N: TB-271 Suggested PCB Layout (PL-143)

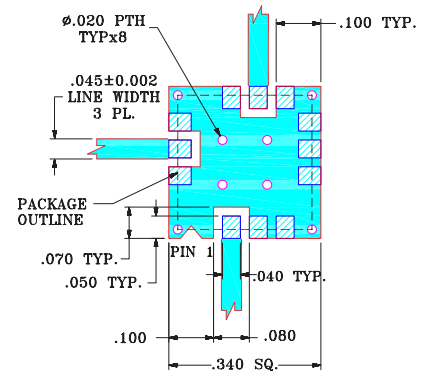

#### NOTE:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt.
.300	.300	.070	.060	.120	.039	.075	.120	.030	.050	.340	.140	.340	.140	.050	.040	grams
7.62	7.62	1.78	1.52	3.05	0.99	1.91	3.05	0.76	1.27	8.64	3.56	8.64	3.56	1.27	1.02	.25

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M169213  
EDR-6568/3F1  
SOS-1400-219+  
RAV  
180814  
Page 1 of 2







# NON-CATALOG

## Performance Data & Curves\*

## SOS-1400-219+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1390 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	48.03	1327.8	1321.3	1313.6	0.44	2.80	3.79	7.81	-33.4	-34.7	-48.3	3.14	9.70	-74.6	-97.2	-117.5	-137.5	1.0	-74.01
0.20	46.93	1337.0	1330.9	1323.7	0.75	3.03	3.90	7.89	-34.0	-35.5	-50.3	2.69	7.24	-74.8	-97.9	-118.3	-138.1	3.5	-88.36
0.50	47.80	1351.1	1345.0	1338.5	1.07	3.31	4.02	7.97	-35.1	-36.2	-53.9	2.43	2.46	-74.6	-98.6	-118.7	-138.6	6.0	-93.62
0.75	49.92	1363.1	1357.0	1350.7	1.23	3.41	4.05	8.01	-36.0	-36.1	-54.8	2.57	4.91	-73.2	-98.4	-119.0	-139.3	8.5	-96.59
1.00	51.70	1375.7	1369.4	1363.0	1.31	3.44	4.02	8.05	-36.1	-35.7	-54.7	2.93	7.48	-74.5	-98.4	-119.0	-139.3	10.0	-98.28
1.25	53.87	1388.8	1382.4	1375.8	1.44	3.44	3.94	8.09	-36.8	-35.5	-54.5	3.16	7.97	-75.9	-98.5	-119.3	-139.3	35.5	-110.11
1.50	56.61	1402.5	1395.8	1389.0	1.60	3.48	3.87	8.13	-37.8	-36.0	-55.4	3.27	6.97	-74.0	-98.7	-119.3	-139.3	60.7	-114.32
1.75	59.31	1417.0	1410.0	1402.7	1.67	3.48	3.81	8.15	-37.6	-36.4	-56.9	3.43	5.97	-74.3	-97.7	-118.7	-138.8	86.7	-118.00
2.00	60.91	1432.2	1424.8	1417.2	1.76	3.46	3.69	8.18	-38.0	-36.8	-58.0	3.47	3.97	-72.4	-97.5	-118.6	-138.7	100.0	-119.20
2.25	61.43	1447.7	1440.0	1432.1	1.79	3.43	3.60	8.20	-38.4	-37.1	-57.7	3.39	4.75	-70.2	-97.4	-118.1	-138.4	361.5	-130.27
2.50	59.60	1463.1	1455.4	1447.2	1.66	3.34	3.49	8.20	-38.1	-37.4	-57.3	3.30	6.60	-71.5	-97.6	-118.3	-138.5	851.6	-137.90
2.80	55.82	1480.7	1473.1	1464.9	1.39	3.13	3.23	8.16	-38.0	-38.0	-58.4	3.41	6.83	-72.3	-96.8	-117.6	-137.8	1000.0	-139.12

\*at 25°C unless mentioned otherwise

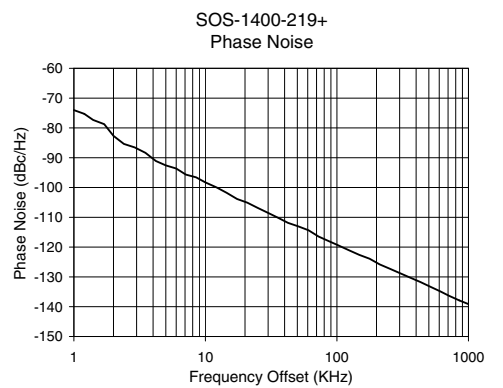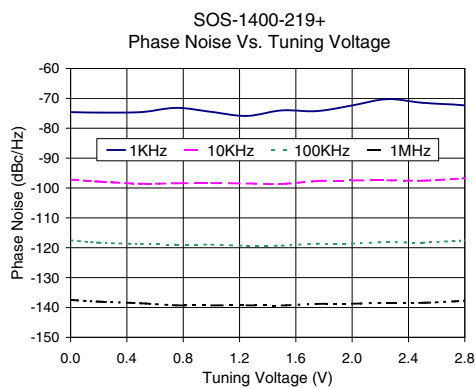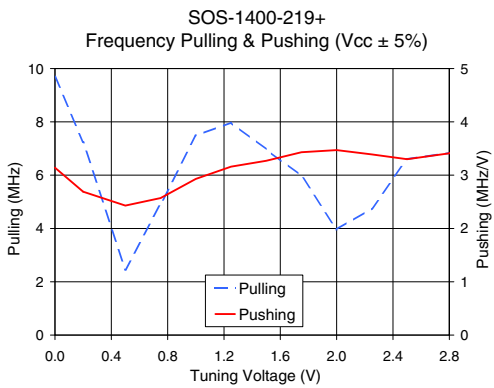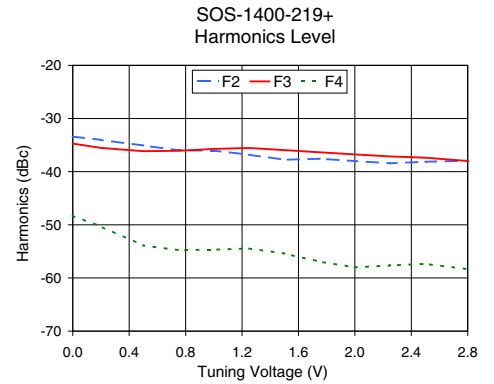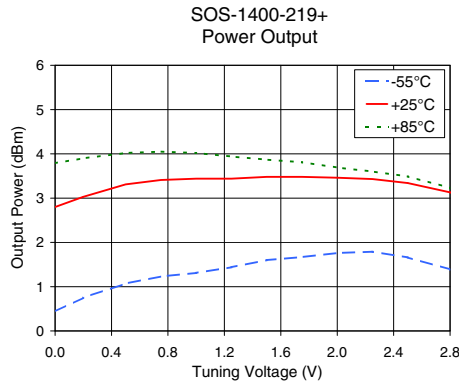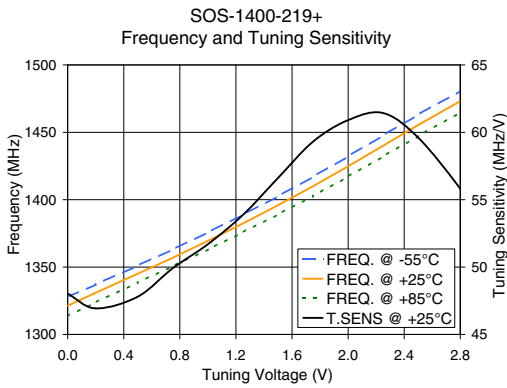

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

