


High Power Bi-Directional Coupler

SYBD-20-142HP+

50Ω 20dB Coupling DC Pass 960 to 1400 MHz



Generic photo used for illustration purposes only

CASE STYLE: JB1233

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	2A

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	1
OUTPUT	2
COUPLED (forward)	4
COUPLED (reverse)	3
GROUND	5

Outline Drawing

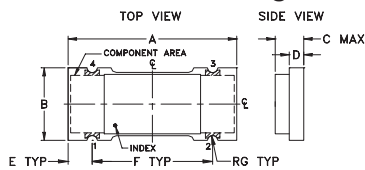

PCB Land Pattern

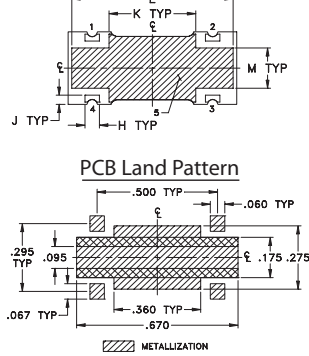


Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.70	.32	.13	.060	.100	.500	.022
17.78	8.13	3.30	1.52	2.54	12.70	0.56
H	J	K	L	M		wt
.060	.040	.360	.670	.175		grams
1.52	1.02	9.14	17.02	4.45		0.68

Demo Board MCL P/N: TB-398 Suggested PCB Layout (PL-260)

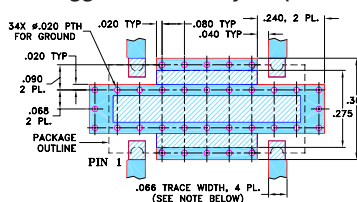

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/WCLStore/terms.jsp

Features

- high power handling, 50 watts max.
- low mainline loss, 0.09 dB typ.
- excellent VSWR, 1.15:1 typ.
- excellent directivity, 26 dB typ.
- wideband frequency, 960 to 1400 MHz

Applications

- GPS
- defense communications

Bi-Directional Coupler Electrical Specifications


FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT (W)
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
f_L - f_U								
960-1400			0.09	0.25	26	18	1.10	—
960-1240	21.8±0.8	±1.3	0.07	0.25	27	18	1.10	50
1240-1400	20.3±0.8	±0.7	0.09	0.25	26	18	1.10	50

1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
960.00	0.05	23.23	23.27	27.25	27.84	29.59	29.11	32.48	32.30
1000.00	0.04	22.89	22.93	27.22	27.98	29.09	28.66	32.18	32.23
1040.00	0.05	22.58	22.61	27.13	27.63	28.73	28.19	31.97	31.64
1080.00	0.05	22.27	22.31	26.90	27.78	28.55	27.97	31.41	31.51
1120.00	0.06	21.98	22.02	26.81	27.80	28.28	27.71	31.27	31.42
1180.00	0.06	21.56	21.59	26.95	27.69	28.08	27.53	31.15	31.23
1240.00	0.07	21.17	21.21	26.88	27.67	27.92	27.38	31.02	31.07
1280.00	0.08	20.93	20.97	26.98	27.88	27.94	27.37	31.07	31.30
1360.00	0.08	20.44	20.48	27.35	28.43	28.19	27.64	31.82	31.80
1400.00	0.09	20.22	20.26	27.67	28.84	28.48	27.90	32.21	32.39


SYBD-20-142HP+
MAINLINE LOSS

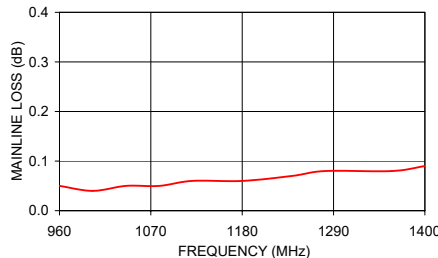


SYBD-20-142HP+
COUPLING & DIRECTIVITY

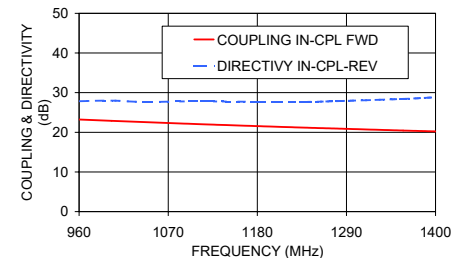

SYBD-20-142HP+
RETURN LOSS

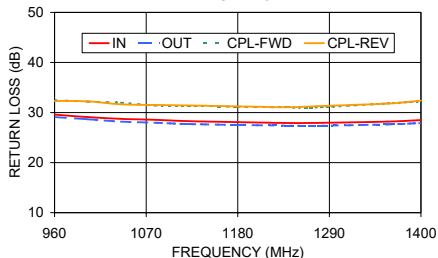

Electrical Schematic

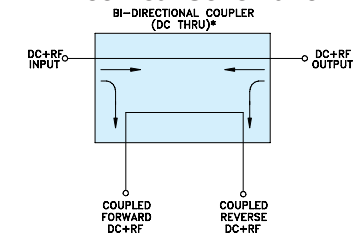

* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M151107
ED-12713/4
SYBD-20-142HP+
WZ/CP/AM
200811