

Ultra-Reliable High Pass Filter

VHP-19

50Ω 2300 to 5500 MHz



Generic photo used for illustration purposes only

CASE STYLE: FF704

Connectors	Model
SMA	VHP-19

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	10W at 25°C

* Passband rating, derate linearly to 0.4x Pmax at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.

Features

- rugged unibody construction, small size
- pass band insertion loss 1.0 dB typ.
- excellent power handling, 10W
- low cost


Applications

- sub-harmonic rejection of VCO
- transmitters/receivers
- lab use

Electrical Specifications (T_{AMB}=25°C)

STOP BAND (MHz)		f _{co} , MHz Nom. (loss 3 dB)	PASSBAND (MHz)	VSWR (:1)	
(loss > 40 dB)	(loss > 20 dB)	Typ.	(loss < 1.3 dB)	Stopband Typ.	Passband Typ.
DC-1450	1650	1995	2300-5500	18	1.3


Outline Drawing

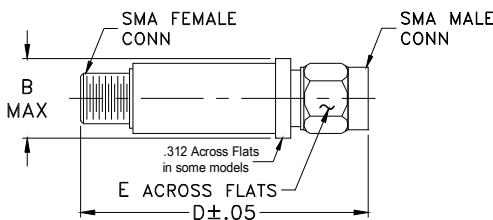


Outline Dimensions (inch/mm)

B	D	E	wt
.410	1.43	.312	grams
10.41	36.32	7.92	10.0

typical frequency response

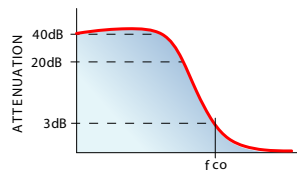


electrical schematic

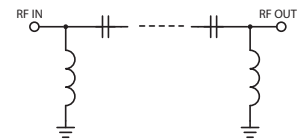

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	93.02	492.89
500.00	48.24	95.45
1000.00	42.60	69.61
1250.00	44.03	60.92
1450.00	44.29	50.18
1650.00	23.60	32.72
1995.00	2.37	1.97
2300.00	1.00	1.40
5500.00	0.50	1.31
9000.00	3.79	5.70

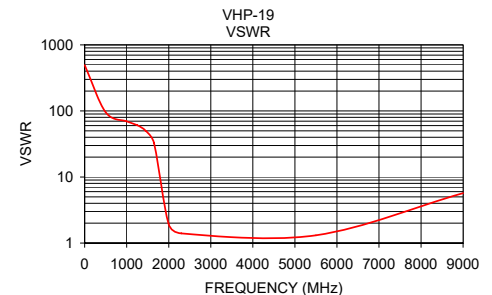

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

