

Coaxial

Voltage Controlled Oscillator

ZX95-2840+

5V Tuning for PLL IC's 2835 to 2860 MHz

Features

- linear tuning characteristics
- low phase noise
- low pulling
- low pushing
- protected by US patent 6,790,049



CASE STYLE: GB956

Connectors	Model
SMA	ZX95-2840-S+

Applications

- r & d
- lab
- instrumentation
- wireless communications
- point-to-point

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER				
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Max.	Typ.	Max.	Vcc (volts)	Current (mA)
ZX95-2840+	2835	2860	+4.5	-79	-105	-126	-146	0.5	5	16	15	110	-90	-25	-15	0.4	1.5	5	40			

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note [AN-40-10](#).

Outline Drawing

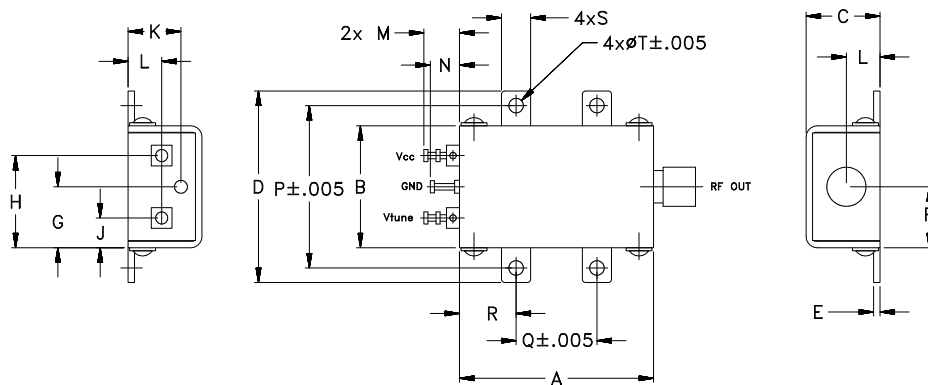

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.20	.75	.46	1.18	.04	.38	.38	.57	.18	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	9.65	9.65	14.48	4.57	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com







REV. A
M152326
EDR-6685/2AF1
ZX95-2840+
RAV
150923
Page 1 of 2

Performance Data & Curves*

ZX95-2840+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 2845 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	26.17	2810.7	2800.2	2791.9	3.48	3.15	2.54	31.81	-27.9	-22.0	-39.8	1.32	0.72	-77.9	-104.0	-125.8	-145.4	1.0	-81.19
0.25	23.00	2816.7	2806.8	2798.8	3.67	3.34	2.74	31.90	-27.6	-23.1	-40.1	1.37	0.66	-78.2	-104.5	-126.1	-145.1	2.0	-89.30
0.50	20.95	2822.2	2812.5	2804.9	3.82	3.50	2.90	31.97	-27.4	-23.5	-40.1	1.40	0.59	-77.5	-104.5	-126.5	-145.2	4.2	-96.84
0.75	19.53	2827.3	2817.8	2810.4	3.94	3.66	3.05	32.04	-27.5	-23.7	-39.9	1.40	0.50	-77.8	-104.9	-125.9	-145.0	6.0	-100.62
1.00	18.70	2832.2	2822.6	2815.4	4.04	3.80	3.18	32.10	-27.7	-23.6	-39.6	1.41	0.41	-77.1	-105.2	-126.6	-146.0	8.5	-103.79
1.25	18.08	2836.8	2827.3	2820.1	4.13	3.92	3.33	32.16	-27.9	-23.3	-39.4	1.42	0.30	-79.0	-104.2	-126.7	-145.8	10.0	-105.49
1.50	17.33	2841.1	2831.8	2824.5	4.23	4.03	3.46	32.21	-28.0	-23.3	-39.3	1.45	0.20	-76.8	-105.4	-126.5	-145.6	20.8	-112.84
1.75	16.53	2845.3	2836.2	2828.9	4.31	4.14	3.55	32.27	-27.9	-24.0	-39.3	1.46	0.09	-77.6	-105.2	-127.2	-146.8	42.5	-119.76
2.00	15.99	2849.5	2840.3	2833.1	4.38	4.24	3.65	32.33	-27.5	-24.8	-38.9	1.47	0.02	-80.1	-105.4	-127.4	-146.8	60.7	-122.64
2.25	15.72	2853.6	2844.3	2837.3	4.44	4.33	3.75	32.38	-26.9	-25.1	-38.6	1.46	0.11	-80.7	-105.2	-127.2	-146.5	86.7	-126.07
2.50	15.63	2857.6	2848.2	2841.3	4.51	4.41	3.84	32.43	-26.2	-24.7	-38.1	1.47	0.19	-80.1	-105.5	-127.2	-147.0	100.0	-127.46
2.75	15.58	2861.5	2852.1	2845.1	4.59	4.48	3.94	32.46	-25.8	-24.3	-38.1	1.48	0.26	-78.1	-104.3	-127.0	-146.3	148.1	-130.40
3.00	15.45	2865.4	2856.0	2848.9	4.68	4.55	4.04	32.50	-25.5	-24.4	-38.5	1.50	0.32	-78.1	-106.2	-126.6	-145.9	211.6	-133.89
3.25	15.22	2869.2	2859.9	2852.7	4.76	4.62	4.12	32.54	-25.4	-24.9	-39.0	1.52	0.36	-78.6	-106.0	-126.9	-146.2	302.4	-136.50
3.50	15.05	2873.0	2863.7	2856.5	4.85	4.70	4.18	32.58	-25.4	-25.2	-39.5	1.53	0.39	-77.2	-105.6	-127.6	-146.1	361.5	-137.87
3.75	14.95	2876.7	2867.5	2860.2	4.94	4.79	4.26	32.62	-25.4	-25.5	-39.7	1.54	0.40	-76.9	-104.8	-127.6	-146.5	432.2	-139.53
4.00	14.83	2880.4	2871.2	2864.0	5.03	4.87	4.34	32.67	-25.3	-25.5	-39.9	1.56	0.40	-76.9	-105.0	-127.9	-145.2	507.5	-140.93
4.25	14.71	2884.1	2874.9	2867.7	5.12	4.96	4.42	32.71	-25.3	-25.7	-39.9	1.58	0.39	-75.3	-105.4	-127.2	-146.9	712.4	-144.12
4.50	14.68	2887.9	2878.6	2871.4	5.20	5.04	4.51	32.75	-25.3	-25.9	-39.9	1.58	0.37	-79.0	-105.2	-127.4	-146.2	851.6	-145.77
5.00	15.11	2895.5	2885.9	2878.7	5.38	5.21	4.69	32.81	-24.7	-25.5	-40.9	1.59	0.30	-79.0	-105.3	-127.0	-146.2	1000.0	-146.91

*at 25°C unless mentioned otherwise

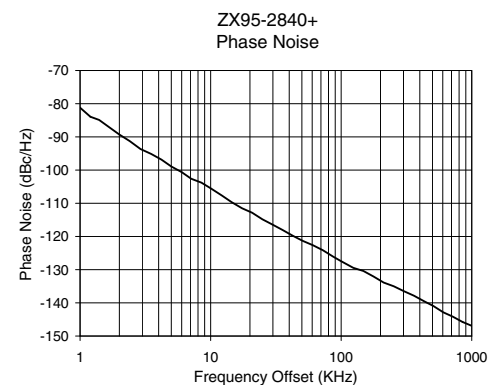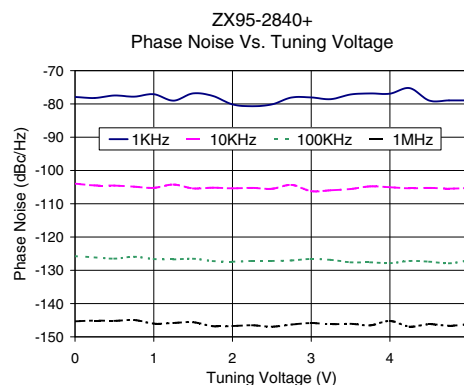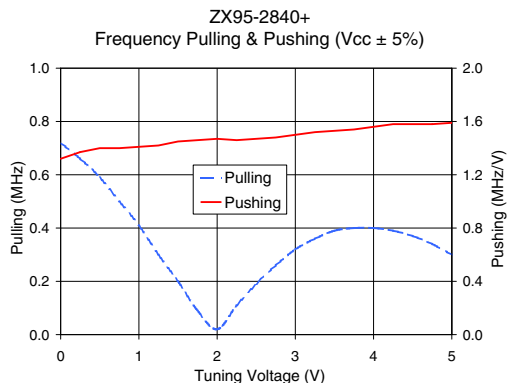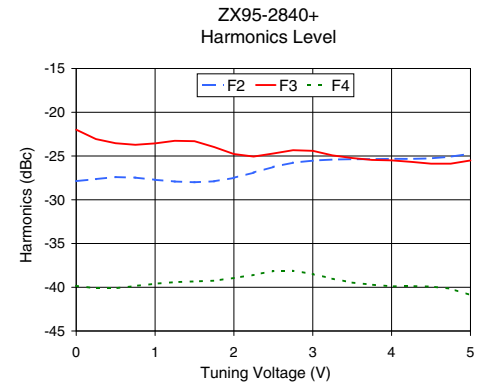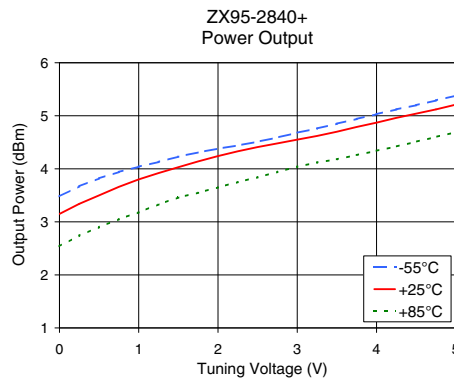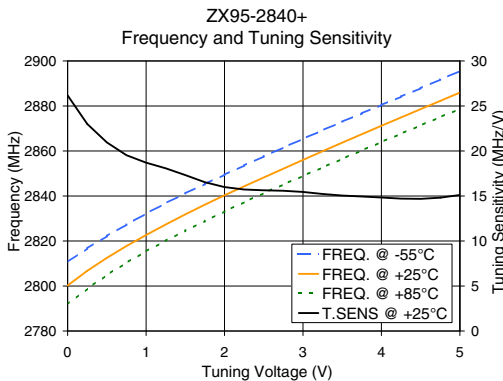

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

