

Voltage Controlled Oscillator

ZX95-485+

5V Tuning for PLL IC's 450 to 485 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- 0.5-5V tuning voltage range
- protected by US patent 6,790,049



CASE STYLE: GB956

Connectors	Model
SMA	ZX95-485-S+

Applications

- r & d
- lab
- instrumentation
- PLL circuitry
- wireless microphones

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, KHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dBc (MHz)	PUSHING (MHz/V)	DC OPERATING POWER					
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)		PORT TIVITY (MHz/V)	CAP (pF)		3 dB MODULATION BANDWIDTH (MHz)	Typ.			Typ.	Max.	Typ.	Typ.	Vcc (volts)	Current (mA)
									Min.	Max.													
ZX95-485+	450	485	-1	-91	-114	-134	-153	0.5	5	11	60	80	-90	-21	-13	0.3	0.2	5	15				

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.



NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note [AN-40-10](#).

Outline Drawing

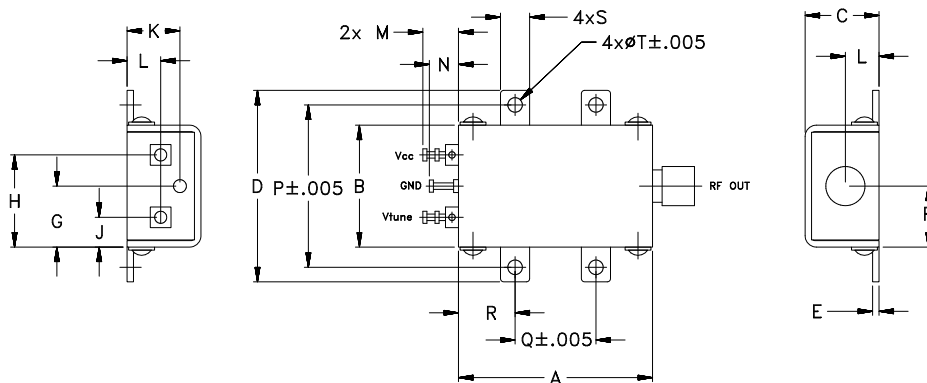

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.20	.75	.46	1.18	.04	.38	.38	.57	.18	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	9.65	9.65	14.48	4.57	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp









Performance Data & Curves*

ZX95-485+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 464 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	12.57	439.4	436.9	435.7	-2.24	-1.40	-1.20	10.05	-20.0	-34.6	-37.5	0.08	0.12	-92.2	-113.7	-134.3	-153.3	1.0	-92.92
0.50	11.06	445.3	442.9	441.8	-2.13	-1.30	-1.10	10.09	-20.1	-34.4	-37.5	0.14	0.12	-91.8	-114.7	-134.0	-153.0	2.0	-98.09
0.75	10.79	448.1	445.7	444.6	-2.08	-1.25	-1.05	10.10	-20.3	-34.2	-37.6	0.17	0.12	-91.2	-114.4	-134.4	-153.3	3.5	-104.47
1.00	10.67	450.8	448.4	447.3	-2.03	-1.20	-1.01	10.12	-20.5	-34.1	-37.5	0.18	0.13	-89.9	-114.6	-134.5	-153.7	6.0	-108.83
1.25	10.66	453.5	451.1	449.9	-1.98	-1.16	-0.97	10.13	-20.7	-34.1	-37.7	0.19	0.13	-89.8	-113.8	-134.3	-154.2	8.5	-112.98
1.50	10.73	456.2	453.7	452.6	-1.93	-1.11	-0.92	10.15	-20.8	-33.9	-37.9	0.20	0.14	-90.5	-113.9	-134.3	-153.0	10.0	-113.40
1.75	10.83	458.9	456.4	455.2	-1.89	-1.07	-0.89	10.16	-20.9	-33.7	-38.0	0.21	0.15	-91.2	-114.4	-134.0	-153.4	20.8	-120.58
2.00	10.96	461.7	459.1	457.9	-1.84	-1.03	-0.85	10.18	-20.9	-33.4	-38.1	0.21	0.15	-90.8	-113.5	-134.4	-153.8	35.5	-125.24
2.25	11.09	464.5	461.9	460.7	-1.80	-1.00	-0.81	10.19	-21.0	-33.3	-38.1	0.21	0.16	-92.0	-114.2	-134.1	-153.1	60.7	-129.09
2.50	11.21	467.3	464.6	463.4	-1.76	-0.96	-0.78	10.20	-21.1	-33.1	-38.3	0.21	0.17	-91.0	-113.8	-134.1	-153.3	86.7	-132.85
2.75	11.30	470.1	467.4	466.2	-1.72	-0.93	-0.76	10.21	-21.2	-32.9	-38.5	0.20	0.18	-90.3	-114.1	-134.2	-153.2	100.0	-134.22
3.00	11.35	473.0	470.3	469.0	-1.69	-0.90	-0.73	10.22	-21.3	-32.7	-38.8	0.19	0.18	-92.0	-113.9	-133.8	-153.6	148.1	-137.28
3.25	11.36	475.9	473.1	471.8	-1.66	-0.88	-0.71	10.23	-21.3	-32.5	-39.1	0.17	0.20	-92.0	-113.4	-133.9	-153.3	177.0	-139.01
3.50	11.32	478.8	475.9	474.6	-1.64	-0.86	-0.70	10.24	-21.3	-32.4	-39.6	0.14	0.22	-90.4	-113.5	-133.7	-153.2	211.6	-140.28
3.75	11.23	481.6	478.8	477.5	-1.62	-0.85	-0.70	10.24	-21.4	-32.2	-40.0	0.11	0.24	-91.5	-114.0	-133.9	-153.7	302.4	-143.80
4.00	11.10	484.4	481.6	480.3	-1.61	-0.85	-0.70	10.24	-21.5	-31.8	-40.3	0.08	0.26	-89.8	-113.0	-133.7	-153.3	361.5	-145.38
4.25	10.95	487.2	484.3	483.0	-1.60	-0.86	-0.71	10.24	-21.6	-31.6	-40.4	0.05	0.27	-91.1	-113.5	-134.0	-152.6	507.5	-148.00
4.50	10.77	490.0	487.1	485.8	-1.60	-0.87	-0.73	10.24	-21.8	-31.4	-41.2	0.01	0.28	-90.3	-112.8	-133.9	-152.6	600.0	-149.44
4.75	10.57	492.7	489.8	488.5	-1.61	-0.89	-0.75	10.24	-21.9	-31.5	-41.7	0.03	0.29	-91.3	-113.2	-133.7	-152.2	851.6	-153.24
5.00	10.36	495.3	492.4	491.1	-1.63	-0.91	-0.78	10.23	-22.0	-31.4	-42.0	0.05	0.27	-90.7	-113.7	-133.5	-152.4	1000.0	-153.26

*at 25°C unless mentioned otherwise

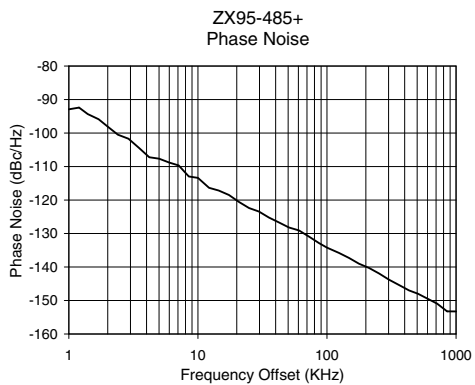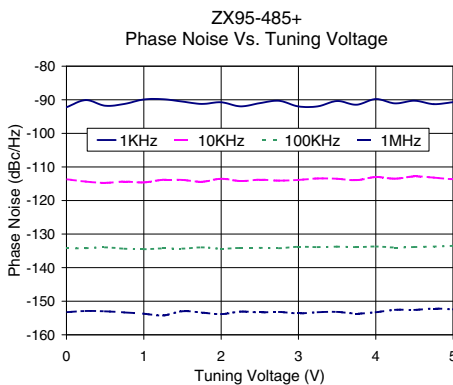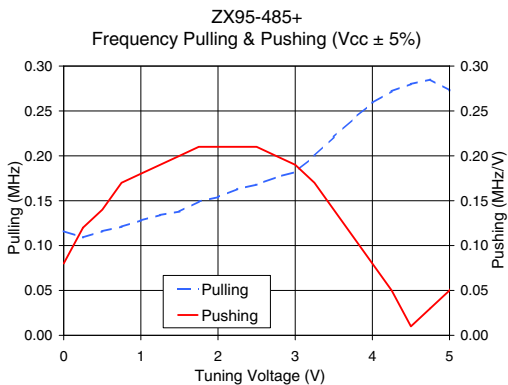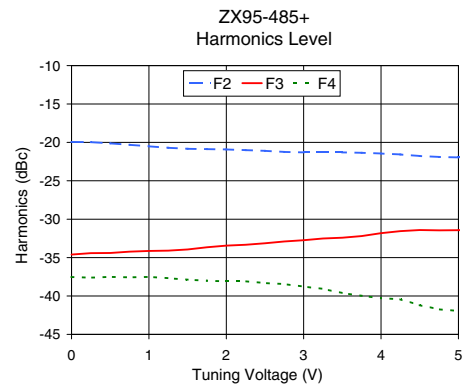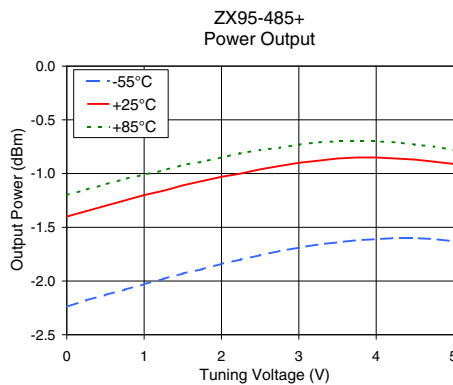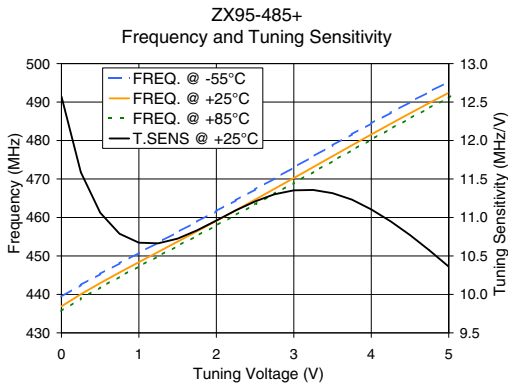

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

