



## THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 1.34 dB at 18 GHz
- Excellent Return Loss, 31 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 8mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard<sup>1</sup>
- Ideal for interconnect of assembled systems



*Generic photo used for illustration purposes only*

<b>Model No.</b>	141-24SBSM+
<b>Case Style</b>	KQ1688-24
<b>Connectors</b>	SMA-Female Bulkhead / SMA-Male

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Replacement for custom bent 0.141" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

## PRODUCT OVERVIEW

141-SBSM+ series Hand-Flex™ coaxial cables are ideal for integrating coaxial components and sub-assemblies in tight spaces and dense system configurations. SMA-female bulkhead connector at one end is equipped with a nickel-plated brass flange for secure connections directly to equipment housing panels. SMA-male connector has a passivated stainless-steel coupling nut over a gold-plated connector body. The outer shield is tin-soaked copper braid, which minimizes signal leakage with high flexibility for easy bending, and dielectric is low loss PTFE. 141-SBSM+ series Hand-Flex coaxial cables are available in various lengths for different system requirements.

## KEY FEATURES

Features	Advantages
Single SMA-female bulkhead connector	Eliminates the need for a bulkhead adapter and connects directly to the front panel of rack-mounted equipment, improving reliability and reducing system cost.
Hand-formable	Hand-Flex cables avoid the need for special cable bending tools, alleviating the risk of damage during bending processes used in semi-rigid cable assemblies.
8mm bend-radius	Ideal for making connections in tight spaces and dense system layouts.
Excellent return loss	Ideal for connecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables and connectors.
Good power handling capability <ul style="list-style-type: none"> <li>• 546W at 0.5 GHz</li> <li>• 90W at 18 GHz</li> </ul>	141-SBSM+ coaxial cables can support medium to high RF power levels and can be used in the transmit path. (Power rating at sea-level).
Built-in anti-torque nut on SMA-male connector	Anti-torque feature supports the SMA connector body during installation, preventing stress to the connector/cable interface.



# Coaxial Cable

## 141-24SBSM+

50Ω 24 inch DC to 18 GHz SMA-Female Bulkhead to SMA-Male

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		18	GHz
Length <sup>2</sup>			24		inches
Insertion Loss	DC - 2	—	0.2	0.6	dB
	2 - 6	—	0.5	1.1	
	6 - 10	—	0.8	1.4	
	10 - 18	—	1.1	2.0	
Return Loss	DC - 2	23	38	—	dB
	2 - 6	23	42	—	
	6 - 10	17	36	—	
	10 - 18	17	33	—	

- 1. Unjacketed cable also available upon request.
- 2. Custom sizes available, consult factory.

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
Power Handling at 25°C	546W at 0.5 GHz 387W at 1 GHz 273W at 2 GHz
Sea Level	156W at 6 GHz 121W at 10 GHz 90W at 18 GHz

Permanent damage may occur if any of these limits are exceeded.



**HAND FLEX™**


# Coaxial Cable

**141-24SBSM+**

Mini-Circuits

50Ω 24 inch DC to 18 GHz SMA-Female Bulkhead to SMA-Male

## CABLE CONSTRUCTION

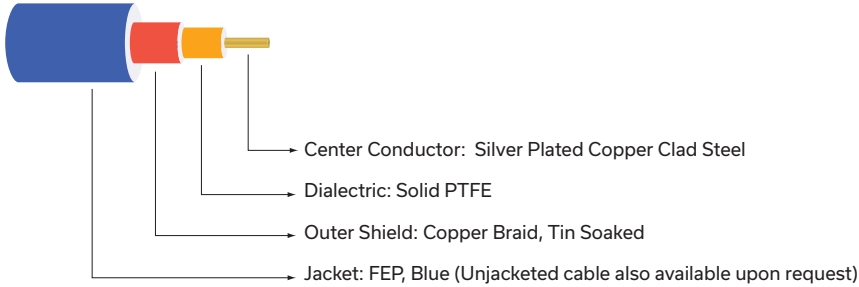


Connectors:

SMA Male Connector: Coupling Nut: Stainless Steel Passivated  
 Body: Stainless Steel Gold Plated  
 Center Pin: Silver Plated Copper Clad Steel

SMA Female Bulkhead Connector: Body & Hex Nut: Stainless Steel, Gold Plated  
 Center Contact: Beryllium copper Gold Plated

## OUTLINE DRAWING

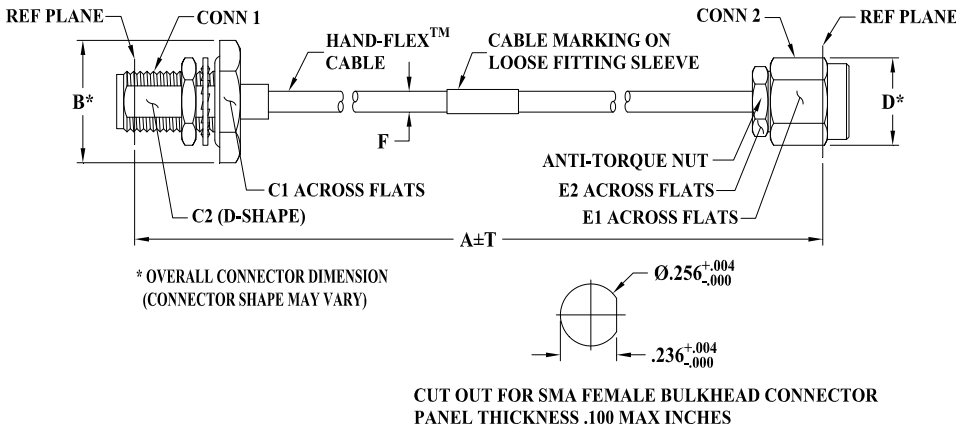

## OUTLINE DIMENSIONS (Inch/mm)

A	B	C1	C2	D	E1	E2	F	T	wt grams
24.0	.49	.433	.232	.36	.315	.250	.163±.004	.15	33.03
609.60	12.45	11.00	5.89	9.14	8.00	6.35	4.14±0.10	3.81	

Mini-Circuits



HAND FLEX™

# Coaxial Cable



## 141-24SBSM+

Mini-Circuits

50Ω 24 inch DC to 18 GHz SMA-Female Bulkhead to SMA-Male

### TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMA-Female Bulkhead	SMA-Male
10	0.02	45.67	47.19
1000	0.26	33.82	34.82
2000	0.37	40.65	39.21
2500	0.42	47.18	41.53
4000	0.55	44.46	47.93
5000	0.62	41.67	40.21
6000	0.69	40.42	38.03
7000	0.76	32.18	31.35
8000	0.82	39.52	44.77
9000	0.88	33.36	34.69
10000	0.94	28.01	28.26
12000	1.04	34.48	36.11
13000	1.09	33.69	32.75
15000	1.19	35.29	33.88
18000	1.34	31.14	36.40

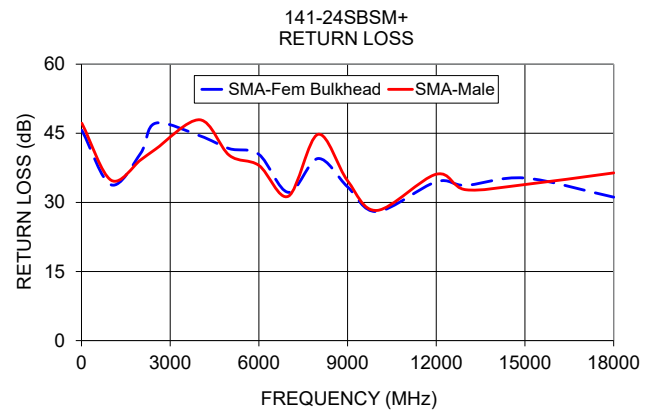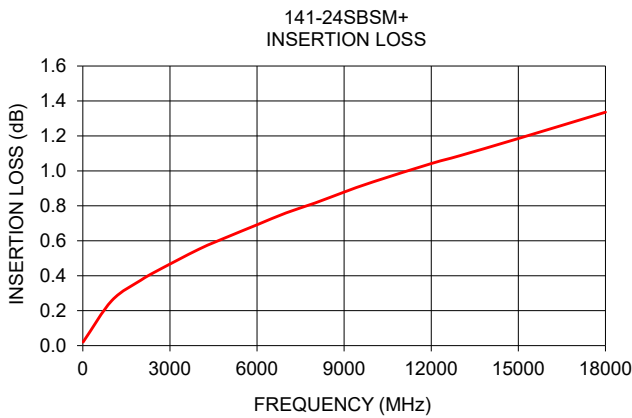

#### NOTES



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)




*Typical Performance Data*

FREQUENCY (MHz)	INSERTION LOSS (dB)	SMA-FEMALE BULKHEAD RETURN LOSS (dB)	SMA-MALE RETURN LOSS (dB)
10	0.02	45.7	47.2
50	0.05	35.1	34.9
100	0.07	34.1	34.1
200	0.11	41.7	41.8
300	0.13	36.0	36.3
400	0.16	36.4	37.1
500	0.18	39.4	40.3
500	0.18	39.4	40.3
1000	0.26	33.8	34.8
1500	0.32	37.2	37.7
2000	0.37	40.6	39.2
2500	0.42	47.2	41.5
3500	0.51	45.7	43.2
4000	0.55	44.5	47.9
4500	0.59	45.2	44.2
5000	0.62	41.7	40.2
5500	0.66	44.6	39.0
6000	0.69	40.4	38.0
6500	0.73	37.7	35.7
7000	0.76	32.2	31.3
7500	0.79	35.4	34.9
8000	0.82	39.5	44.8
8500	0.85	35.8	36.4
9000	0.88	33.4	34.7
9500	0.91	30.2	30.4
10000	0.94	28.0	28.3
10500	0.96	31.7	32.2
11000	0.99	30.6	33.6
11500	1.01	32.2	32.7
12000	1.04	34.5	36.1
12500	1.07	32.5	32.2
13000	1.09	33.7	32.7
13500	1.11	42.9	37.9
14000	1.14	30.3	30.7
14500	1.17	34.5	33.2
15000	1.19	35.3	33.9
15500	1.21	40.8	45.4
16000	1.24	32.8	36.3
16500	1.26	31.7	33.2
17000	1.28	37.6	37.7
17500	1.32	28.5	30.6
18000	1.34	31.1	36.4

Typical Performance Curves

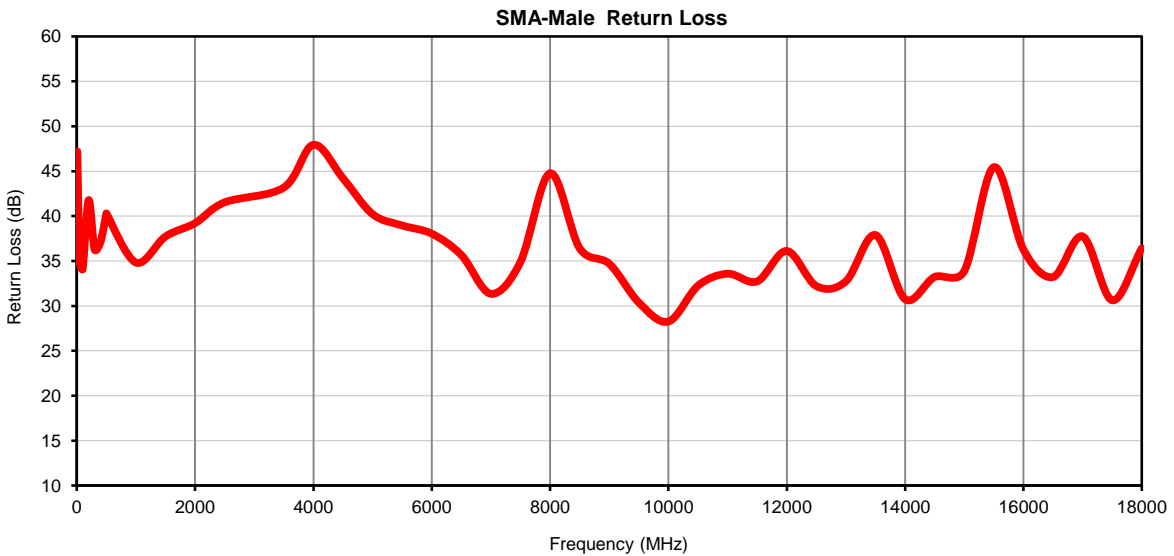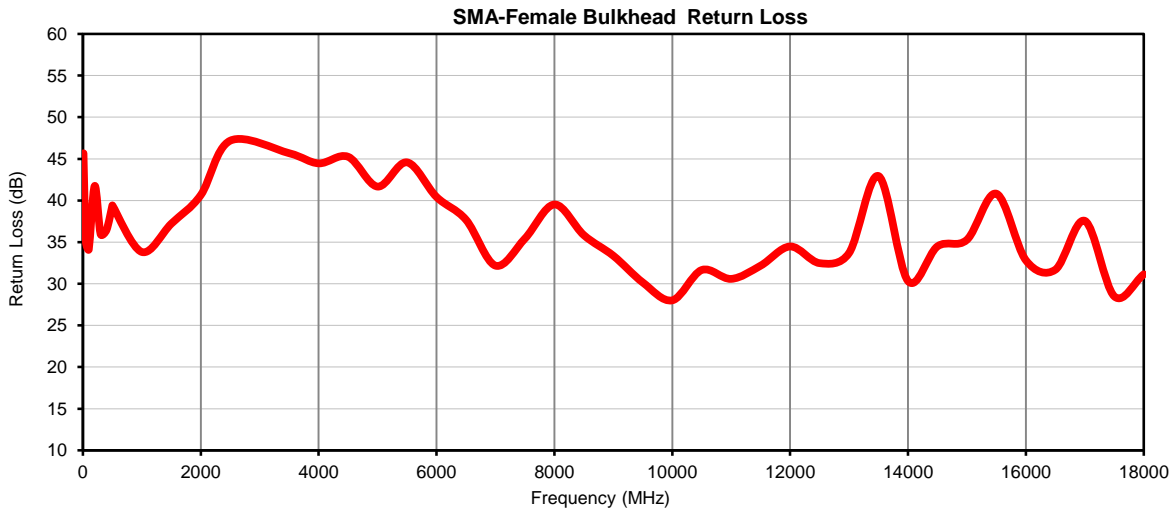

### Outline Dimensions

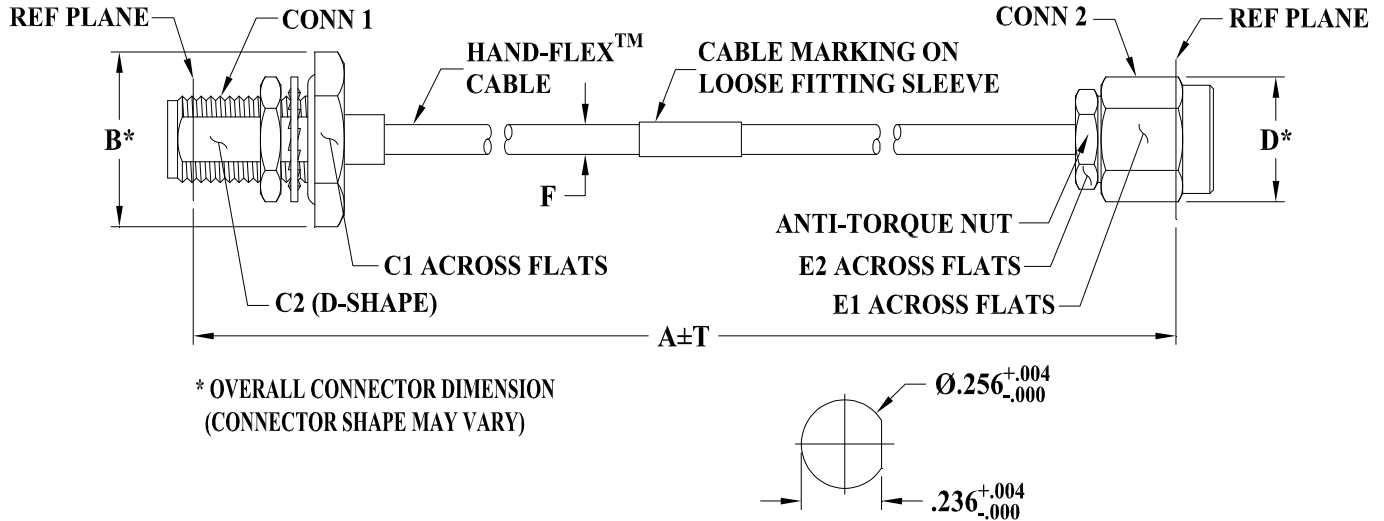

\* OVERALL CONNECTOR DIMENSION  
(CONNECTOR SHAPE MAY VARY)

CUT OUT FOR SMA FEMALE BULKHEAD CONNECTOR  
PANEL THICKNESS .100 MAX INCHES

KQ1688 SERIES  
SMA FEMALE BULKHEAD (CONN-1)  
SMA MALE (CONN-2)

CASE STYLE #	A		B	C1	C2	D	E1	E2	F		T		WEIGHT GRAMS
	INCH	MM							141U-ASBSM+	141-ASBSM+	INCH	MM	
KQ1688-4	4.00	101.60	.49 (12.45)	.433 (11.00)	.232 (5.89)	.36 (9.14)	.315 (8.00)	.250 (6.35)	.141±.003 (3.58±0.07)	.163±.004 (4.14±0.10)	.05	1.27	10.17
KQ1688-7	7.00	177.80									.10	2.54	13.60
KQ1688-12	12.00	304.80									.10	2.54	19.32
KQ1688-24	24.00	609.60									.15	3.81	33.03

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

#### Note:

- 141 Hand-Flex™ Coaxial Cable.
- "A" represents length of cable.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment	Individual Model Data sheet
Storage Temperature	-55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment	Individual Model Data Sheet
Thermal Shock	-55° to 100°C, 100 Cycles	MIL-STD-202F; Method 107G
Multiple Bend Radius	40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables	
Single Bend Radius	8 mm for 141 series cables 6 mm for 086 series cables	