

# Surface Mount Frequency Mixer

## ADE-1HW+

### Level 17 (LO Power +17 dBm) 5 to 750 MHz



Generic photo used for illustration purposes only  
CASE STYLE: CD542

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200
13"	500, 1000


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	


### Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

### Outline Drawing




### PCB Land Pattern



### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

### Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

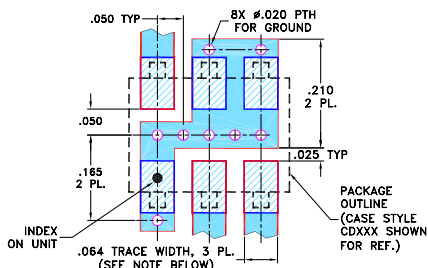

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- low conversion loss, 6.0 dB typ.
- excellent L-R isolation, 48 dB typ.
- excellent L-I isolation, 40 dB typ.
- aqueous washable
- protected by US patent 6,133,525

### Applications

- VHF/UHF receivers

### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)										
		L	M	U	L	M	U											
5-750	DC-750	6.0	0.10	7.2	8.8	64	45	48	35	42	28	50	35	40	30	30	18	26


1 dB COMP.: +14 dBm typ.

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
m = mid band [ $2f_L$  to  $f_U/2$ ]

### Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
5.00	35.00	6.34	64.80	52.10	1.35	1.38
10.00	40.00	6.07	64.50	50.90	1.20	1.38
20.00	50.00	6.03	62.90	48.30	1.12	1.38
50.00	80.00	5.86	59.30	44.20	1.06	1.41
65.19	95.19	5.76	56.90	44.10	1.04	1.51
130.18	160.18	5.68	54.80	41.00	1.02	1.58
195.17	225.17	5.82	48.90	41.90	1.00	1.66
250.00	280.00	5.92	47.90	40.80	1.02	1.62
260.16	290.16	5.73	47.80	40.30	1.02	1.64
295.00	325.00	5.93	47.00	38.80	1.04	1.75
300.00	330.00	5.90	46.80	38.90	1.04	1.75
325.15	355.15	5.96	45.70	39.20	1.04	1.68
390.14	420.14	6.02	46.40	34.70	1.08	1.84
455.13	485.13	6.15	45.20	31.60	1.11	1.80
500.00	530.00	6.24	43.40	30.70	1.13	1.87
520.12	550.12	6.25	42.90	30.20	1.14	1.81
585.11	615.11	6.25	41.50	28.10	1.16	2.06
650.10	680.10	6.16	40.30	26.60	1.22	2.23
715.09	745.09	6.52	39.10	26.10	1.29	2.18
750.00	780.00	6.73	38.60	25.60	1.37	2.58







### Electrical Schematic

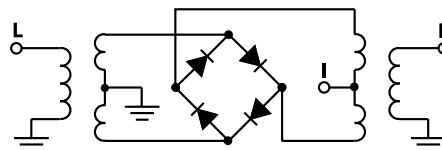

**Mini-Circuits**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. G  
M158496  
ADE-1HW  
ED-8339/1  
DJ/TD/CP/AM  
200415  
Page 1 of 2

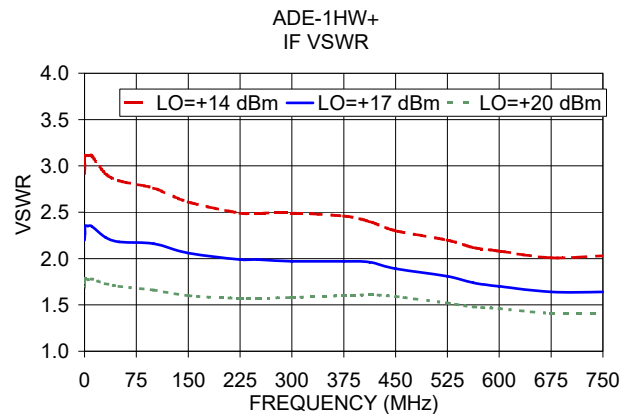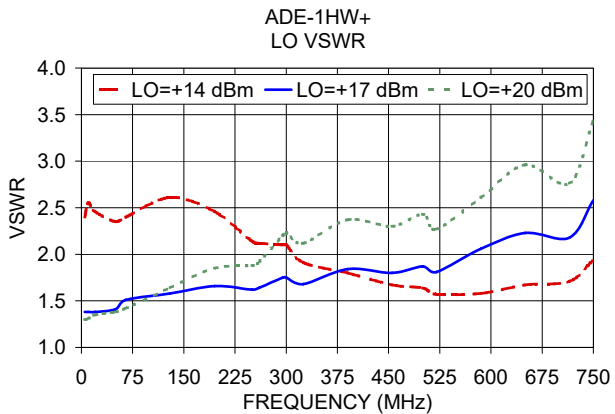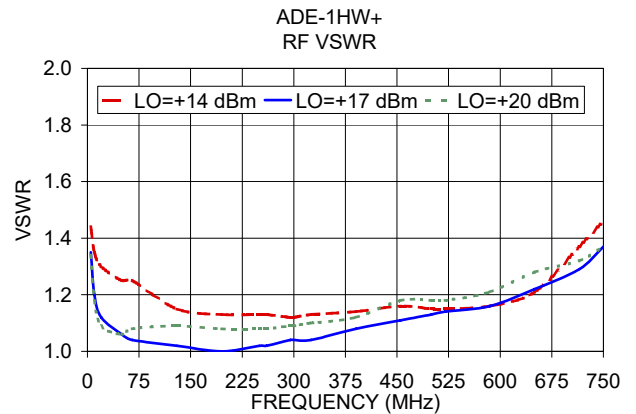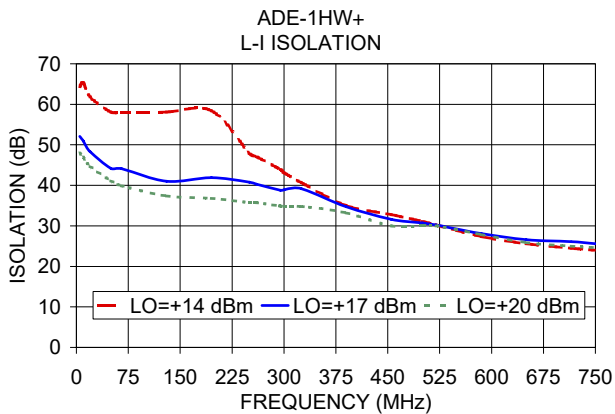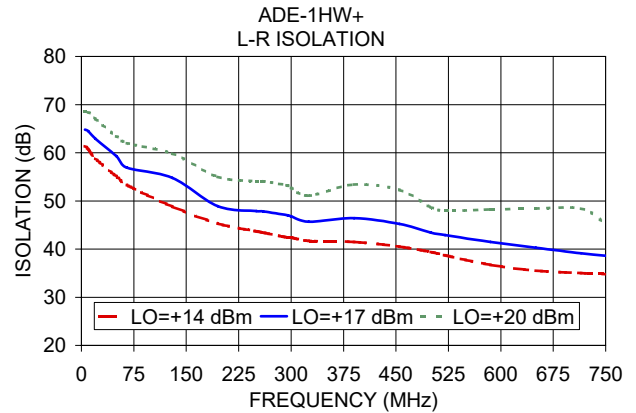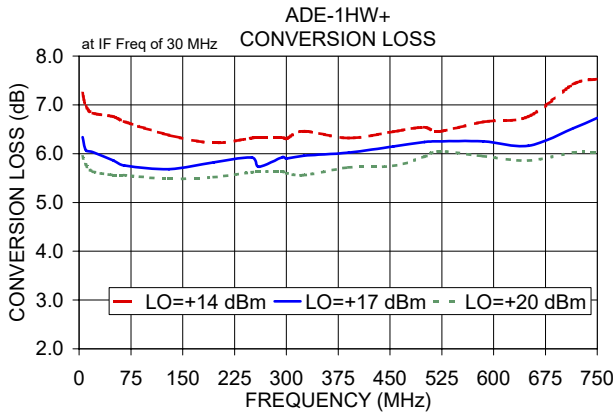

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Frequency Mixer

# ADE-1HW+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	CONVERSION LOSS IF FIXED @IF(OUT)=30MHz (dB)			RF (IN) (MHz)	LO (MHz)	IP3 INPUT (dBm)			RF (IN) (MHz)	LO (MHz)	COMPRESSION @RF IN=+14dBm (dB)		
		@LO (dBm)					@LO (dBm)					@LO (dBm)		
		+14	+17	+20			+14	+17	+20			+14	+17	+20
5.0	35.0	7.24	6.34	5.94	10.1	40.1	18.30	23.34	25.67	10.1	40.1	0.12	0.17	0.11
10.0	40.0	6.97	6.07	5.77	50.4	80.4	20.45	22.89	30.58	50.4	80.4	0.25	0.21	0.12
50.4	80.4	7.39	6.38	5.91	90.7	120.7	20.07	28.27	32.23	90.7	120.7	0.31	0.21	0.13
90.7	120.7	7.62	6.29	5.85	131.0	161.0	26.56	29.04	32.04	131.0	161.0	0.64	0.30	0.12
131.0	161.0	7.14	6.12	5.86	171.3	201.3	25.31	29.68	31.05	171.3	201.3	0.54	0.24	0.12
171.3	201.3	6.88	6.12	5.88	211.5	241.5	23.59	29.13	27.66	211.5	241.5	0.81	0.32	0.15
211.5	241.5	6.98	6.17	5.92	251.8	281.8	25.92	28.56	28.25	251.8	281.8	0.79	0.29	0.16
251.8	281.8	6.77	6.16	5.98	292.1	322.1	25.40	32.30	26.61	292.1	322.1	0.85	0.38	0.18
292.1	322.1	6.85	6.18	6.00	332.4	362.4	25.59	23.79	25.59	332.4	362.4	0.88	0.30	0.20
332.4	362.4	6.84	6.32	6.05	372.7	402.7	27.19	24.80	23.10	372.7	402.7	0.81	0.33	0.19
372.7	402.7	6.91	6.32	6.13	413.0	443.0	23.69	27.91	25.46	413.0	443.0	0.90	0.44	0.23
413.0	443.0	6.98	6.36	6.15	453.3	483.3	24.32	25.56	27.97	453.3	483.3	0.89	0.31	0.29
453.3	483.3	6.99	6.51	6.17	493.6	523.6	27.28	23.98	23.69	493.6	523.6	1.13	0.41	0.29
493.6	523.6	6.91	6.56	6.30	533.9	563.9	31.86	24.02	22.48	533.9	563.9	1.36	0.50	0.31
533.9	563.9	6.95	6.65	6.43	574.2	604.2	25.53	23.74	21.49	574.2	604.2	1.51	0.65	0.42
574.2	604.2	7.00	6.65	6.43	614.4	644.4	22.84	23.91	21.71	614.4	644.4	1.69	0.99	0.60
614.4	644.4	7.22	6.71	6.39	654.7	684.7	25.21	24.56	26.15	654.7	684.7	1.59	1.24	0.71
654.7	684.7	7.59	6.73	6.35	695.0	725.0	17.20	22.98	26.78	695.0	725.0	1.55	1.33	0.97
695.0	725.0	8.01	7.03	6.38	735.3	765.3	15.15	17.61	24.16	735.3	765.3	1.47	1.03	1.09
735.3	765.3	8.31	7.57	6.64	775.6	805.6	15.15	15.49	21.28	775.6	805.6	1.59	0.99	1.03
775.6	805.6	8.38	7.74	6.96	815.9	845.9	15.42	14.97	17.29	815.9	845.9	1.58	0.93	0.89
815.9	845.9	8.62	8.02	7.33	856.2	886.2	16.07	15.26	16.07	856.2	886.2	1.49	0.88	0.79
856.2	886.2	8.81	8.17	7.57	896.5	926.5	16.52	15.75	15.81	896.5	926.5	1.62	0.88	0.75
896.5	926.5	8.99	8.34	7.79	916.6	946.6	17.05	16.20	16.19	916.6	946.6	1.64	0.84	0.72
916.6	946.6	9.10	8.50	7.94	956.9	986.9	17.84	17.04	16.82	956.9	986.9	1.65	0.83	0.68
956.9	986.9	9.31	8.63	8.05	977.1	1007.1	18.39	17.74	17.37	977.1	1007.1	1.79	0.83	0.70
977.1	1007.1	9.46	8.72	8.06	1017.3	1047.3	19.41	18.29	18.15	1017.3	1047.3	1.71	0.90	0.86
1017.3	1047.3	9.80	8.83	8.01	1037.5	1067.5	19.78	18.90	19.04	1037.5	1067.5	1.59	0.95	0.95
1037.5	1067.5	9.97	8.82	7.95	1077.8	1107.8	19.43	19.78	19.81	1077.8	1107.8	1.33	1.12	1.08
1077.8	1107.8	10.57	8.90	7.91	1097.9	1127.9	19.24	19.79	20.22	1097.9	1127.9	1.25	1.21	1.18
1097.9	1127.9	10.77	8.88	7.83	1138.2	1168.2	18.59	18.84	20.72	1138.2	1168.2	0.94	1.39	1.16
1138.2	1168.2	11.71	8.96	7.96	1158.4	1188.4	18.09	18.18	20.64	1158.4	1188.4	0.90	1.55	1.22
1158.4	1188.4	12.30	9.06	8.22	1198.7	1228.7	18.14	17.31	20.25	1198.7	1228.7	0.77	1.74	1.20
1198.7	1228.7	12.41	9.11	8.40	1218.8	1248.8	18.21	17.18	20.15	1218.8	1248.8	0.77	1.81	1.19
1218.8	1248.8	13.03	9.54	8.77	1259.1	1289.1	18.31	17.13	19.70	1259.1	1289.1	0.71	1.89	1.17
1259.1	1289.1	13.37	9.76	9.00	1279.2	1309.2	18.51	17.31	19.59	1279.2	1309.2	0.78	1.83	1.11
1279.2	1309.2	13.43	10.08	9.47	1319.5	1349.5	23.63	18.33	19.50	1319.5	1349.5	0.93	1.75	1.06
1319.5	1349.5	13.58	10.37	9.77	1339.7	1369.7	28.46	18.56	19.94	1339.7	1369.7	1.16	1.72	1.01
1339.7	1369.7	14.01	10.99	10.31	1380.0	1410.0	23.20	19.50	21.27	1380.0	1410.0	1.39	1.71	1.03
1380.0	1410.0	13.99	11.15	10.52	1400.1	1430.1	20.48	20.28	21.83	1400.1	1430.1	1.45	1.62	1.04
1400.1	1430.1													



# Frequency Mixer

# ADE-1HW+

## Typical Performance Data

IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=375.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=10.1MHz (dB)	IF (OUT) (MHz)	LO (MHz)	CONVERSION LOSS VS. IF FREQUENCY @RF(IN)=750.1MHz (dB)
		@LO (dBm)			@LO (dBm)			@LO (dBm)
		+17			+17			+17
365.0	10.1	6.53	10.0	20.1	6.44	740.0	10.1	7.04
355.9	19.2	6.60	28.7	38.8	6.29	721.3	28.8	7.08
346.8	28.3	6.68	47.4	57.5	6.37	702.6	47.5	6.95
337.7	37.4	6.51	66.2	76.3	6.25	683.8	66.3	6.61
328.6	46.5	6.57	84.9	95.0	6.15	665.1	85.0	6.51
319.5	55.6	6.42	103.6	113.7	6.03	646.4	103.7	6.43
310.4	64.7	6.35	122.3	132.4	6.07	627.7	122.4	6.41
301.3	73.8	6.37	141.0	151.1	6.12	609.0	141.1	6.32
292.2	82.9	6.19	159.7	169.8	6.11	590.3	159.8	6.22
283.1	92.0	6.26	178.5	188.6	6.07	571.5	178.6	6.23
274.0	101.1	6.15	197.2	207.3	6.08	552.8	197.3	6.21
264.9	110.2	6.11	215.9	226.0	6.16	534.1	216.0	6.22
255.8	119.3	6.10	234.6	244.7	6.19	515.4	234.7	6.20
246.7	128.4	5.98	253.3	263.4	6.27	496.7	253.4	6.24
237.6	137.5	6.05	272.1	282.2	6.23	477.9	272.2	6.19
228.5	146.6	5.96	290.8	300.9	6.27	459.2	290.9	6.25
219.4	155.7	5.93	309.5	319.6	6.29	440.5	309.6	6.31
210.3	164.8	5.94	328.2	338.3	6.40	421.8	328.3	6.31
201.2	173.9	5.92	346.9	357.0	6.39	403.1	347.0	6.29
192.1	183.0	5.88	365.6	375.7	6.48	384.4	365.7	6.35
182.9	192.2	5.87	384.4	394.5	6.46	365.6	384.5	6.42
173.8	201.3	5.94	403.1	413.2	6.44	346.9	403.2	6.41
164.7	210.4	5.95	421.8	431.9	6.52	328.2	421.9	6.48
155.6	219.5	5.93	440.5	450.6	6.63	309.5	440.6	6.49
146.5	228.6	5.97	459.2	469.3	6.72	290.8	459.3	6.51
137.4	237.7	5.99	477.9	488.0	6.72	272.1	478.0	6.51
128.3	246.8	5.97	496.7	506.8	6.83	253.3	496.8	6.61
119.2	255.9	5.95	515.4	525.5	6.78	234.6	515.5	6.59
110.1	265.0	5.97	534.1	544.2	6.80	215.9	534.2	6.69
101.0	274.1	6.02	552.8	562.9	6.76	197.2	552.9	6.69
91.9	283.2	5.99	571.5	581.6	6.71	178.5	571.6	6.75
82.8	292.3	6.01	590.3	600.4	6.67	159.7	590.4	6.81
73.7	301.4	6.06	609.0	619.1	6.65	141.0	609.1	6.82
64.6	310.5	6.09	627.7	637.8	6.64	122.3	627.8	6.84
55.5	319.6	6.08	646.4	656.5	6.57	103.6	646.5	6.78
46.4	328.7	6.10	665.1	675.2	6.54	84.9	665.2	6.82
37.3	337.8	6.17	683.8	693.9	6.49	66.2	683.9	6.75
28.2	346.9	6.21	702.6	712.7	6.54	47.4	702.7	6.87
19.1	356.0	6.19	721.3	731.4	6.71	28.7	721.4	7.02
10.0	365.1	6.32	740.0	750.1	6.86	10.0	740.1	7.29

# Frequency Mixer

# ADE-1HW+

## Typical Performance Data

LO (MHz)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)		
	@LO (dBm)			@LO (dBm)		
	+14	+17	+20	+14	+17	+20
5.0	61.40	64.80	68.50	64.40	52.10	47.90
10.0	60.70	64.50	68.40	65.30	50.90	46.90
50.4	57.76	61.86	67.84	59.66	57.37	50.00
90.7	53.73	57.66	63.02	57.72	52.69	45.94
131.0	49.62	53.69	60.95	49.37	52.88	43.45
171.3	47.56	51.71	58.50	48.42	50.34	42.37
211.5	45.66	50.41	57.92	46.74	49.87	41.61
251.8	43.98	48.91	56.09	44.75	53.31	42.30
292.1	43.09	47.46	53.95	44.97	49.46	41.46
332.4	41.80	46.38	52.59	41.17	47.18	41.29
372.7	41.32	46.11	53.11	40.71	44.97	41.52
413.0	40.45	46.11	53.62	40.38	41.36	39.10
453.3	39.34	44.06	50.56	38.15	37.65	36.51
493.6	38.31	42.17	47.97	36.31	35.82	34.39
533.9	37.65	41.34	46.16	33.87	34.71	34.09
574.2	37.45	41.46	47.02	31.63	33.28	33.70
614.4	36.81	40.88	46.45	29.90	31.99	32.62
654.7	36.54	41.31	48.07	28.21	30.74	31.89
695.0	35.83	41.22	47.74	27.30	29.80	30.79
735.3	34.63	39.47	46.74	26.93	28.95	29.21
775.6	34.30	38.55	46.16	27.08	29.05	29.26
815.9	33.95	38.31	45.85	26.63	28.49	29.43
856.2	33.22	37.82	45.57	25.74	27.51	28.96
896.5	32.40	36.70	43.45	24.98	26.66	28.25
916.6	31.83	35.63	40.66	24.37	25.97	27.52
956.9	31.12	34.82	39.86	23.47	25.04	26.64
977.1	30.69	34.42	39.96	23.02	24.50	26.22
1017.3	29.97	33.71	39.87	22.13	23.49	25.32
1037.5	29.74	33.77	41.31	21.68	22.96	24.99
1077.8	28.90	33.04	41.80	21.09	22.39	24.77
1097.9	28.60	32.54	41.01	20.59	21.83	24.28
1158.4	27.40	31.53	42.23	19.31	20.79	23.22
1198.7	26.49	30.81	40.01	18.54	20.00	22.04
1218.8	26.14	30.54	37.97	18.10	19.60	21.55
1259.1	25.31	29.76	34.51	17.39	18.94	20.50
1279.2	24.99	29.17	33.68	17.02	18.36	19.97
1319.5	24.20	27.88	30.98	16.41	17.47	18.98
1339.7	23.94	27.51	30.44	15.93	17.12	18.66
1380.0	23.31	25.96	28.62	15.62	16.32	17.91
1400.1	23.15	25.39	27.97	15.49	15.96	17.63

RF (IN) (MHz)	LO (MHz)	RF-IF ISOLATION (dB)		
		@LO (dBm)		
		+14	+17	+20
10.1	40.1	45.19	53.90	56.96
50.4	80.4	36.51	36.99	37.68
90.7	120.7	31.43	32.48	32.74
131.0	161.0	28.97	29.69	29.96
171.3	201.3	27.34	28.02	28.23
211.5	241.5	25.93	26.61	26.90
251.8	281.8	25.31	25.91	26.28
292.1	322.1	24.57	25.47	25.86
332.4	362.4	24.18	24.91	25.37
372.7	402.7	24.12	24.73	25.10
413.0	443.0	23.98	24.63	24.85
453.3	483.3	23.95	24.61	24.97
493.6	523.6	23.71	24.18	24.62
533.9	563.9	22.81	23.02	23.26
574.2	604.2	21.68	21.78	22.01
614.4	644.4	20.42	20.33	20.34
654.7	684.7	19.70	19.32	19.22
695.0	725.0	19.76	19.43	19.15
735.3	765.3	19.72	19.66	19.35
775.6	805.6	19.42	19.34	19.34
815.9	845.9	19.24	19.12	19.10
856.2	886.2	18.91	18.88	18.88
896.5	926.5	18.38	18.42	18.68
916.6	946.6	18.15	18.23	18.38
956.9	986.9	17.50	17.68	17.97
977.1	1007.1	17.15	17.50	17.76
1017.3	1047.3	16.40	16.94	17.00
1037.5	1067.5	15.95	16.60	16.57
1077.8	1107.8	15.06	15.80	15.75
1097.9	1127.9	14.61	15.34	15.27
1138.2	1168.2	13.58	14.30	14.29
1158.4	1188.4	13.04	13.80	13.82
1198.7	1228.7	12.08	12.79	12.74
1218.8	1248.8	11.65	12.27	12.12
1259.1	1289.1	10.67	11.29	11.09
1279.2	1309.2	10.27	10.83	10.58
1319.5	1349.5	9.45	9.86	9.64
1339.7	1369.7	8.95	9.37	9.20
1380.0	1410.0	8.32	8.51	8.49
1400.1	1430.1	8.06	8.15	8.12

# Frequency Mixer

# ADE-1HW+

## Typical Performance Data

RF (IN) (MHz)	LO (MHz)	RF VSWR (:1)		
		@LO (dBm)		
		+14	+17	+20
5.0	35.1	1.44	1.35	1.34
10.0	40.1	1.35	1.20	1.18
50.4	80.4	1.33	1.11	1.04
90.7	120.7	1.34	1.08	1.05
131.0	161.0	1.26	1.04	1.06
171.3	201.3	1.21	1.02	1.07
211.5	241.5	1.23	1.03	1.06
251.8	281.8	1.17	1.02	1.07
292.1	322.1	1.20	1.02	1.07
332.4	362.4	1.18	1.03	1.07
372.7	402.7	1.17	1.03	1.07
413.0	443.0	1.17	1.04	1.09
453.3	483.3	1.14	1.06	1.13
493.6	523.6	1.11	1.08	1.13
533.9	563.9	1.09	1.10	1.15
574.2	604.2	1.09	1.11	1.17
614.4	644.4	1.11	1.12	1.19
654.7	684.7	1.17	1.13	1.21
695.0	725.0	1.28	1.15	1.21
735.3	765.3	1.36	1.23	1.23
775.6	805.6	1.42	1.30	1.27
815.9	845.9	1.51	1.39	1.35
856.2	886.2	1.62	1.51	1.45
896.5	926.5	1.73	1.62	1.56
916.6	946.6	1.80	1.68	1.61
956.9	986.9	1.93	1.80	1.72
977.1	1007.1	2.02	1.88	1.79
1017.3	1047.3	2.18	2.00	1.92
1037.5	1067.5	2.28	2.08	2.01
1077.8	1107.8	2.48	2.24	2.17
1097.9	1127.9	2.57	2.32	2.25
1138.2	1168.2	2.80	2.49	2.41
1158.4	1188.4	2.92	2.56	2.47
1198.7	1228.7	3.11	2.70	2.58
1218.8	1248.8	3.18	2.75	2.64
1259.1	1289.1	3.34	2.86	2.71
1279.2	1309.2	3.40	2.90	2.75
1319.5	1349.5	3.39	2.93	2.79
1339.7	1369.7	3.43	2.98	2.84
1380.0	1410.0	3.43	3.00	2.86
1400.1	1430.1	3.43	3.00	2.87

LO (MHz)	LO VSWR (:1)		
	@LO (dBm)		
	+14	+17	+20
5.0	2.40	1.38	1.30
10.0	2.55	1.38	1.31
50.4	3.14	1.60	1.26
90.7	2.58	1.57	1.35
131.0	3.16	1.70	1.42
171.3	2.82	1.67	1.51
211.5	2.70	1.62	1.61
251.8	2.59	1.64	1.69
292.1	2.25	1.62	1.80
332.4	2.13	1.62	1.90
372.7	1.94	1.67	1.99
413.0	1.84	1.73	2.13
453.3	1.75	1.75	2.19
493.6	1.71	1.85	2.31
533.9	1.64	1.91	2.40
574.2	1.57	1.97	2.52
614.4	1.54	2.04	2.62
654.7	1.55	2.07	2.66
695.0	1.63	2.16	2.76
735.3	1.72	2.25	2.83
775.6	1.82	2.39	2.98
815.9	1.89	2.49	3.11
856.2	1.97	2.57	3.20
896.5	2.07	2.68	3.33
916.6	2.12	2.72	3.37
956.9	2.22	2.79	3.44
977.1	2.28	2.83	3.48
1017.3	2.42	2.91	3.56
1037.5	2.48	2.95	3.58
1077.8	2.63	3.00	3.61
1097.9	2.72	3.04	3.62
1138.2	2.92	3.14	3.67
1158.4	3.01	3.16	3.65
1198.7	3.24	3.25	3.67
1218.8	3.37	3.33	3.73
1259.1	3.62	3.50	3.85
1279.2	3.76	3.59	3.89
1319.5	4.07	3.83	4.05
1339.7	4.19	3.95	4.13
1380.0	4.45	4.15	4.21
1400.1	4.57	4.24	4.25

IF (OUT) (MHz)	IF VSWR @LO=750.5MHz (:1)		
	@LO (dBm)		
	+14	+17	+20
0.1	2.92	2.20	1.69
0.5	3.01	2.27	1.74
1.0	3.11	2.35	1.78
5.0	3.11	2.35	1.77
10.0	3.11	2.35	1.78
28.5	3.56	2.53	1.82
47.0	3.38	2.42	1.77
65.5	3.12	2.25	1.67
84.0	3.23	2.32	1.70
102.5	3.33	2.38	1.76
121.0	3.28	2.36	1.75
139.5	3.22	2.32	1.72
158.0	3.18	2.31	1.72
176.5	3.30	2.40	1.80
195.0	3.31	2.40	1.79
213.5	3.18	2.32	1.75
232.0	3.21	2.34	1.78
250.5	3.07	2.26	1.74
269.0	3.01	2.23	1.72
287.5	2.98	2.21	1.71
306.0	3.04	2.27	1.77
324.5	2.99	2.24	1.76
343.0	2.84	2.14	1.69
361.5	2.83	2.13	1.69
380.0	2.86	2.17	1.74
398.5	2.83	2.14	1.73
417.0	2.77	2.09	1.69
435.5	2.77	2.09	1.69
454.0	2.74	2.09	1.71
491.0	2.64	2.01	1.65
509.5	2.71	2.06	1.69
528.0	2.62	2.00	1.67
546.5	2.53	1.93	1.62
583.5	2.57	1.96	1.65
602.0	2.54	1.94	1.64
620.5	2.50	1.89	1.60
639.0	2.51	1.89	1.58
657.5	2.50	1.89	1.60
694.5	2.47	1.85	1.55
731.5	2.55	1.90	1.59
750.0	2.33	1.80	1.66

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	32	7	25	17	37	39	42	38	46
1	-	18	+0	32	14	31	30	35	28	58	33	52
2	>100	85	44	57	43	56	40	62	50	59	62	62
3	>100	65	56	66	55	73	49	68	49	65	52	71
4	>100	76	77	78	85	73	75	76	74	74	71	79
5	>100	>92	78	85	79	83	74	80	74	80	77	83
6	>100	>92	>92	89	90	92	86	>92	84	>92	84	>92
7	>100	>92	>92	>92	>92	>92	>92	92	90	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -1.00 dBm.  
 LO IN: 400.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -7.6 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	27	42	20	37	32	57	55	63	52	62
1	-	19	+0	33	14	34	25	37	36	58	43	55
2	89	57	41	53	38	57	35	54	43	59	64	64
3	>100	51	42	54	47	58	38	50	43	55	42	74
4	>100	65	52	82	52	67	52	65	48	84	61	72
5	>100	73	59	77	53	73	50	63	46	67	49	63
6	>100	89	63	77	65	77	66	78	65	84	63	79
7	>100	83	84	78	67	91	67	78	63	76	60	80
8	>100	99	85	89	79	79	80	78	76	75	69	78
9	>100	100	91	100	80	91	70	80	69	80	70	78
10	>100	102	>102	101	102	93	89	85	78	84	76	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; 9.00 dBm.  
 LO IN: 400.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; 2.38 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 ADE-1HW+  
 100817  
 Page 5 of 5



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




## Typical Performance Curves


Conversion Loss @ IF=30MHz

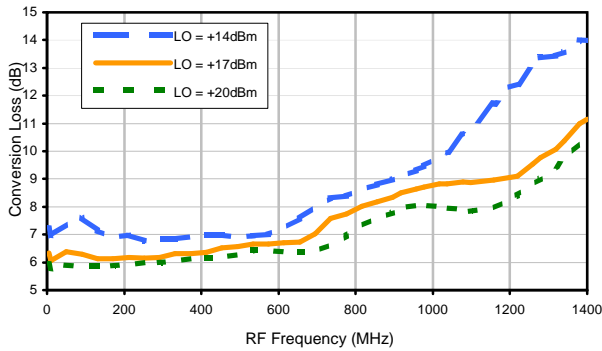


Conversion Loss vs. IF @ RF=375.1MHz

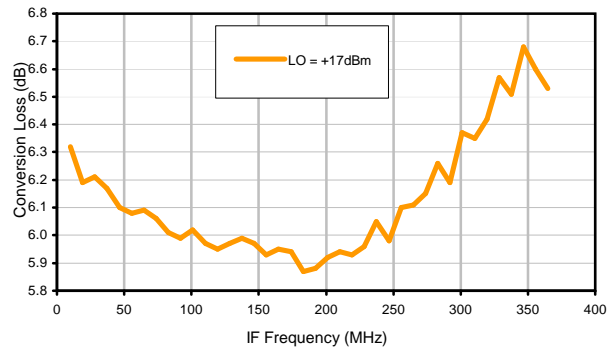


Conversion Loss vs. IF @ RF=10.1MHz

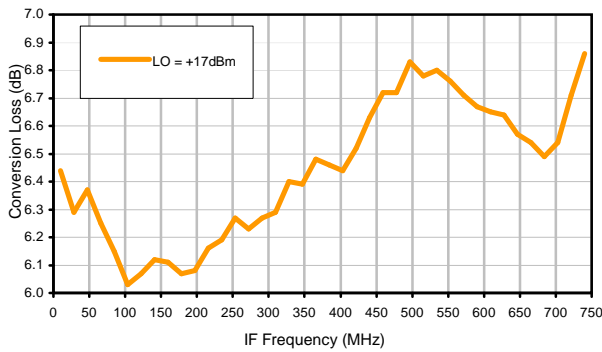


Conversion Loss vs. IF @ RF=750.1MHz

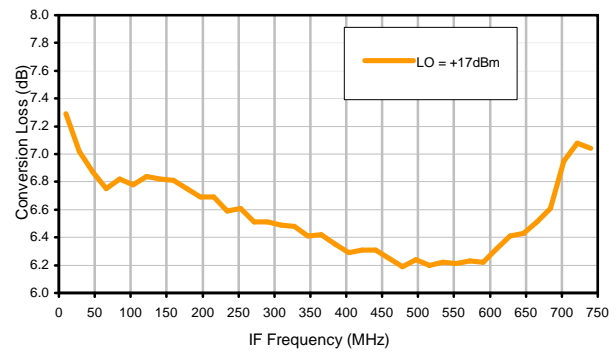

IP3 Input

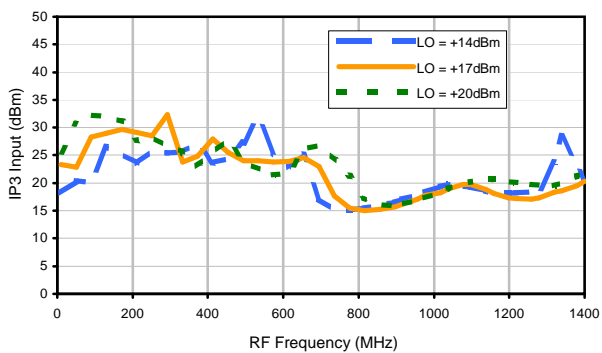


Compression @ RF IN=+14dBm

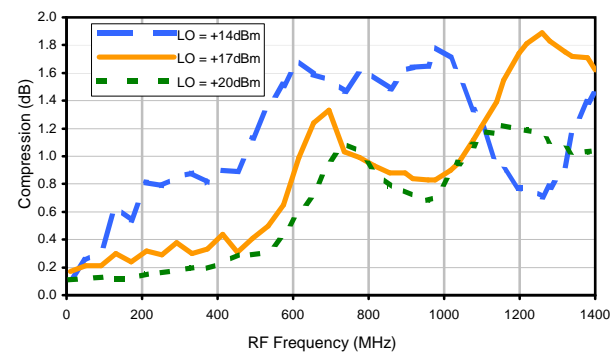




## Typical Performance Curves


LO-RF Isolation

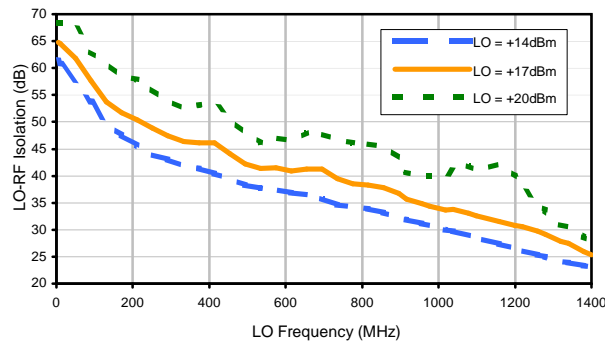


LO-IF Isolation

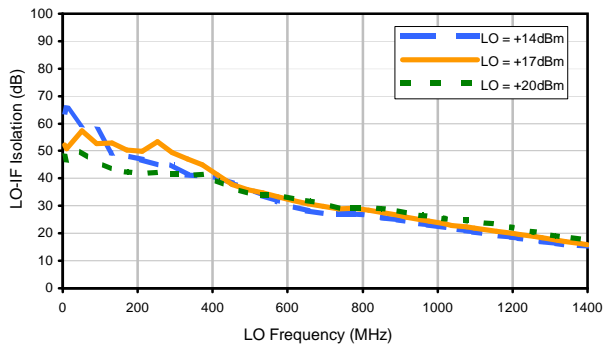


RF-IF Isolation

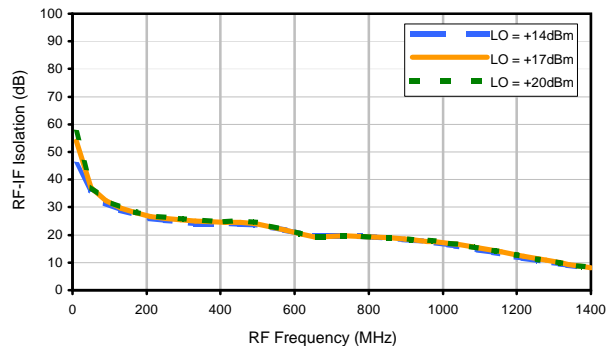


RF VSWR

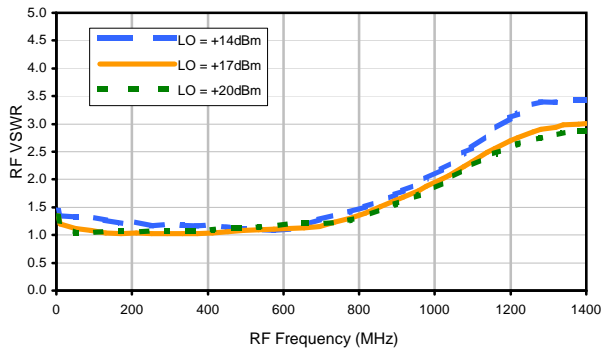

LO VSWR

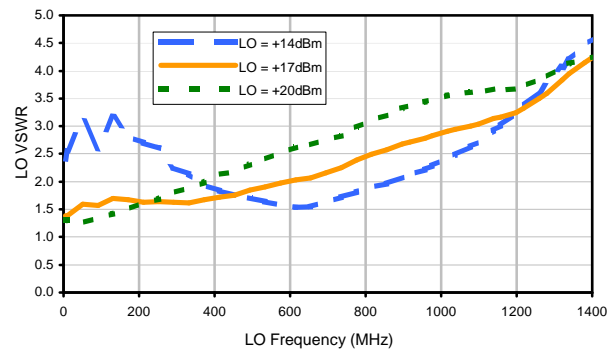

IF VSWR

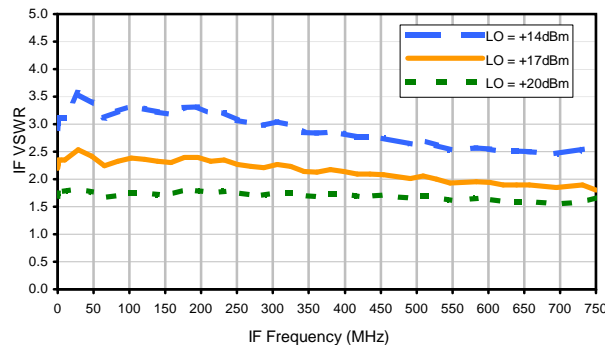

## Harmonics Tables

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	17	32	7	25	17	37	39	42	38	46
1	-	18	+0	32	14	31	30	35	28	58	33	52
2	>100	85	44	57	43	56	40	62	50	59	62	62
3	>100	65	56	66	55	73	49	68	49	65	52	71
4	>100	76	77	78	85	73	75	76	74	74	71	79
5	>100	>92	78	85	79	83	74	80	74	80	77	83
6	>100	>92	>92	89	90	92	86	>92	84	>92	84	>92
7	>100	>92	>92	>92	>92	>92	>92	92	90	>92	>92	>92
8	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
9	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
10	>100	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92	>92
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; -1.00 dBm.  
 LO IN: 400.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; -7.6 dBm

RF HARMONICS ORDER

	(-dBm)	(-dBc)										
0	-	-	27	42	20	37	32	57	55	63	52	62
1	-	19	+0	33	14	34	25	37	36	58	43	55
2	89	57	41	53	38	57	35	54	43	59	64	64
3	>100	51	42	54	47	58	38	50	43	55	42	74
4	>100	65	52	82	52	67	52	65	48	84	61	72
5	>100	73	59	77	53	73	50	63	46	67	49	63
6	>100	89	63	77	65	77	66	78	65	84	63	79
7	>100	83	84	78	67	91	67	78	63	76	60	80
8	>100	99	85	89	79	79	80	78	76	75	69	78
9	>100	100	91	100	80	91	70	80	69	80	70	78
10	>100	102	>102	101	102	93	89	85	78	84	76	83
	RF CAL	0	1	2	3	4	5	6	7	8	9	10

### LO HARMONICS ORDER

Test conditions: RF IN: 370.1 MHz; 9.00 dBm.  
 LO IN: 400.01 MHz; +17.00 dBm  
 IF OUT: 29.91 MHz; 2.38 dBm

- Notes: 1. All Harmonics are in (dBc) relative to IF OUTPUT.  
 2. + entry denotes harmonics are in (dBc) above IF OUTPUT.  
 3. RF Cal represent the Harmonics level of the RF input signal to the mixer.

REV. X2  
 ADE-1HW+  
 100817  
 Page 3 of 3



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED • RoHS compliant  
 P.O. Box 350166, Brooklyn, New York 11235-0006 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

# Case Style

# CD

CD541  
CD542  
CD636  
CD637

## Outline Dimensions



## PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Termination finish:  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

**Mini-Circuits**<sup>®</sup>

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F34



Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
				1000

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
A	M101143	ADDED "gk" PIN CONNECTION, TT100 CASE STYLE & NOTE 2	10/10/05	MMG	DJ
B	M102713	ADDED "...WITH SMOBC"	01/17/06	MMG	IL
C	M108637	REMOVED "PIN 1", ADDED INDEX ON UNIT	12/01/06	MYG	FL


SUGGESTED MOUNTING CONFIGURATION  
FOR BH292, CD541/542/636/637, TT100/240 CASE  
STYLES, "gk", "ht", "hu", "nd", "w" PIN CONNECTIONS



- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:  
 2 PL DECIMALS ±  
 3 PL DECIMALS ± .005  
 ANGLES ±  
 FRACTIONS ±

	INITIALS	DATE
DRAWN	MMG	07/17/02
CHECKED	WL	08/02/02
APPROVED	DJ	08/05/02



**Mini-Circuits®**

13 Neptune Avenue  
 Brooklyn NY 11235

PL, gk/ht/hu/nd/w, BH292,  
 CD541/542/636/637, TT100/240, TB-03

Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-052	C
FILE:	98PL052	SCALE: 8:1	SHEET: 1 OF 1

# Evaluation Board and Circuit

For Pin Connections and DUT Orientation Refer to  
Data Sheet of the DUT



TB-03



Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.030 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215