



SURFACE MOUNT

# RF Transformer

## ADT1-1WT-1+

75Ω 1 to 400 MHz

### FEATURES

- 1 dB Bandwidth Covers Entire Frequency Range
- Good Return Loss, 21 dB Typ.
- Leaded Surface Mount
- Aqueous Washable
- Protected Under US Patent 6,133,525



Generic photo used for illustration purposes only

CASE STYLE: CD542

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

### APPLICATIONS

- High Speed Data Communications
- Baluns

### ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio			1		
Frequency Range		1		400	MHz
Insertion Loss <sup>1</sup>	1-400		1		dB
Amplitude Unbalance	1-400		0.7		dB
Phase Unbalance	1-400		5		Degree
Return Loss <sup>2</sup>	1-400	16	21		dB

1. Insertion Loss is referenced to mid-band loss, 0.5 dB typ.


2. Return loss specified from 1 to 250 MHz.

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20°C to +85°C
Storage Temperature	-55°C to +100°C
RF Power	250 mW
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

### CONFIGURATION A

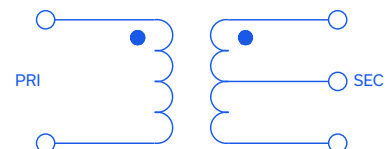

REV. E  
ECO-014934  
ADT1-1WT-1+  
MCL NY  
251105





**SURFACE MOUNT**

# RF Transformer

## ADT1-1WT-1+

Mini-Circuits

75Ω 1 to 400 MHz


### PIN CONNECTIONS

PRIMARY DOT	3
PRIMARY	1
SECONDARY DOT	4
SECONDARY	6
SECONDARY CT	5
NOT USED	2


**PRODUCT MARKING:** N/A

**DEMO BOARD MCL P/N:** TB-ADT1-1WT-1+

### OUTLINE DRAWING

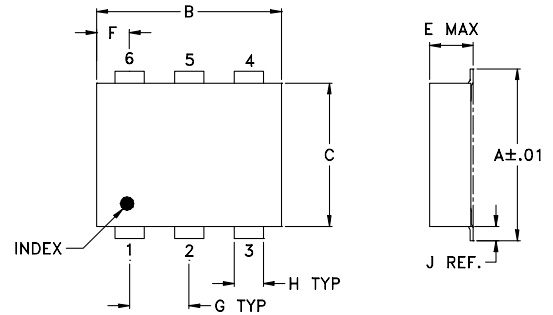

### PBC Land Pattern



**Suggested Layout**  
Tolerance to be within ±.002 in

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20

**TAPE & REEL INFORMATION: F34**



SURFACE MOUNT

# RF Transformer

## ADT1-1WT-1+


Mini-Circuits

75Ω 1 to 400 MHz


### TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
1	0.56	22.65	0.05	0.28
2	0.47	25.12	0.03	0.16
4	0.40	27.64	0.02	0.08
6	0.37	28.83	0.02	0.03
8	0.36	29.44	0.01	0.02
10	0.37	29.80	0.01	0.01
20	0.39	30.47	0.01	0.29
40	0.41	30.27	0.00	0.56
60	0.44	29.55	0.02	0.83
80	0.45	28.73	0.03	1.18
100	0.47	27.78	0.07	1.44
125	0.50	26.57	0.11	1.84
150	0.53	25.39	0.17	2.23
175	0.54	24.26	0.22	2.63
200	0.56	23.23	0.29	3.04
225	0.60	22.30	0.37	3.40
250	0.62	21.50	0.45	3.72
275	0.66	20.78	0.54	4.20
300	0.68	20.11	0.65	4.57
325	0.74	19.48	0.76	4.98
350	0.77	18.81	0.87	5.34
375	0.82	18.16	1.01	5.66
400	0.89	17.52	1.16	5.96

INSERTION LOSS

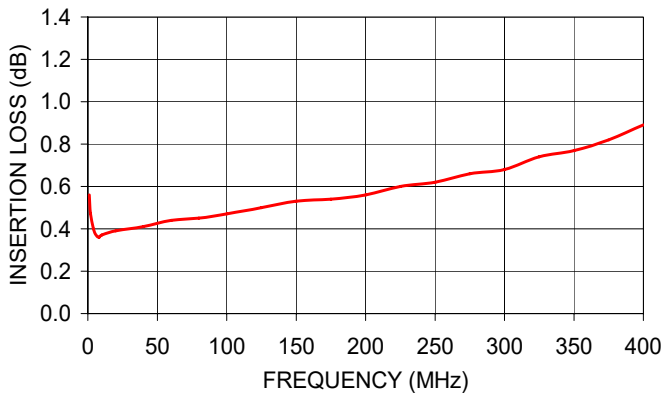

INPUT RETURN LOSS

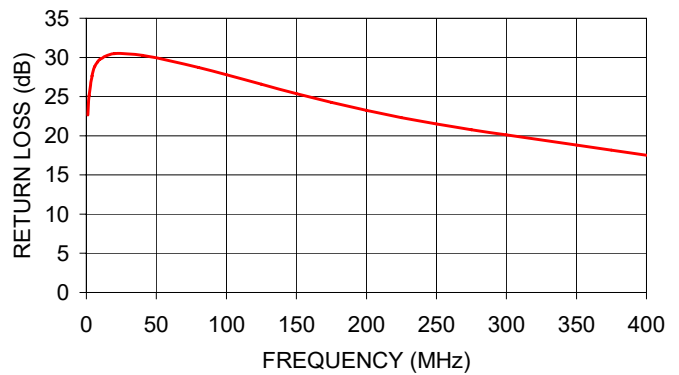

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# RF Transformer

# ADT1-1WT-1+


## Typical Performance Data

FREQUENCY (MHz)	AVERAGE INSERTION LOSS (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg)
1	0.56	22.65	0.05	0.28
2	0.47	25.12	0.03	0.16
4	0.40	27.64	0.02	0.08
6	0.37	28.83	0.02	0.03
8	0.36	29.44	0.01	0.02
10	0.37	29.80	0.01	0.01
20	0.39	30.47	0.01	0.29
40	0.41	30.27	0.00	0.56
60	0.44	29.55	0.02	0.83
80	0.45	28.73	0.03	1.18
100	0.47	27.78	0.07	1.44
125	0.50	26.57	0.11	1.84
150	0.53	25.39	0.17	2.23
175	0.54	24.26	0.22	2.63
200	0.56	23.23	0.29	3.04
225	0.60	22.30	0.37	3.40
250	0.62	21.50	0.45	3.72
275	0.66	20.78	0.54	4.20
300	0.68	20.11	0.65	4.57
325	0.74	19.48	0.76	4.98
350	0.77	18.81	0.87	5.34
375	0.82	18.16	1.01	5.66
400	0.89	17.52	1.16	5.96




## Typical Performance Curves


### Average Insertion Loss

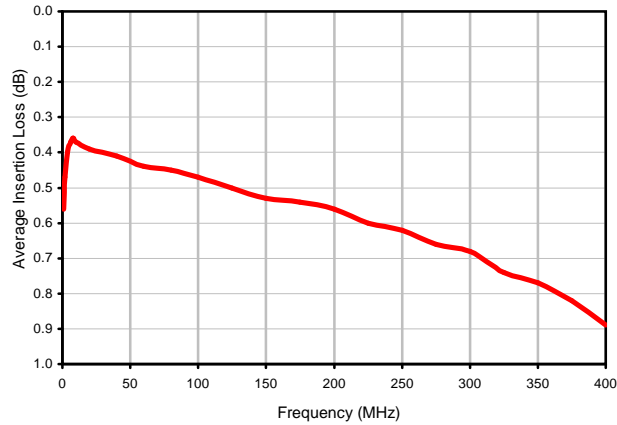


### Input Return Loss

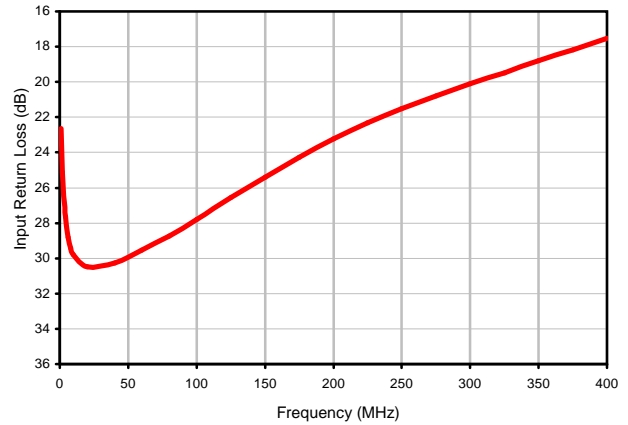

### Amplitude Unbalance

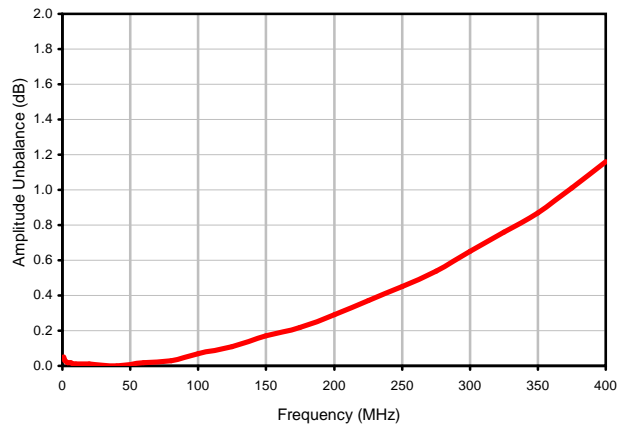

### Phase Unbalance


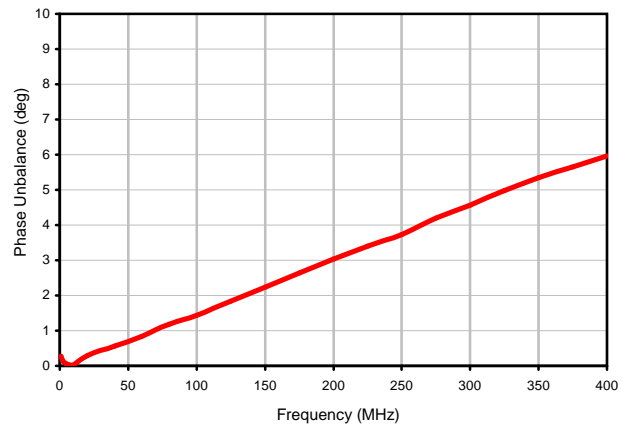


# Case Style


# CD

CD541  
CD542  
CD636  
CD637

## Outline Dimensions

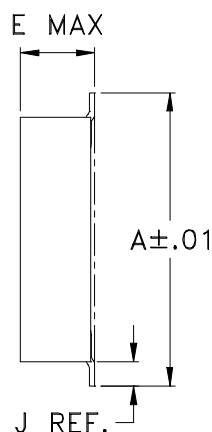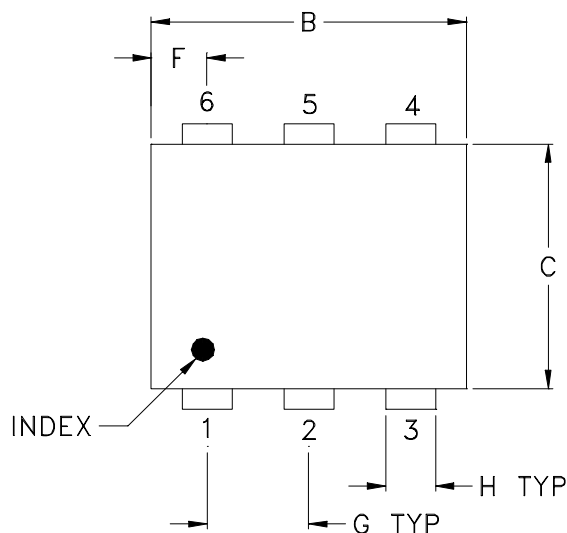

## PCB Land Pattern

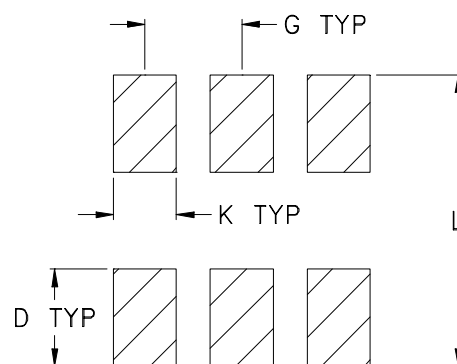

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE#	A	B	C	D	E	F	G	H	J	K	L	WT, GRAM
CD541					.082 (2.08)							.15
CD542	.272 (6.91)	.310 (7.87)	.220 (5.58)	.100 (2.54)	.112 (2.84)	.055 (1.40)	.100 (2.54)	.030 (0.76)	.026 (0.66)	.065 (1.65)	.300 (7.62)	.20
CD636					.162 (4.11)							.25
CD637					.206 (5.23)							.40

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

- Case material: Plastic.
- Termination finish:
  - For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
  - For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.

**Mini-Circuits®**


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Tape & Reel Packaging TR-F34

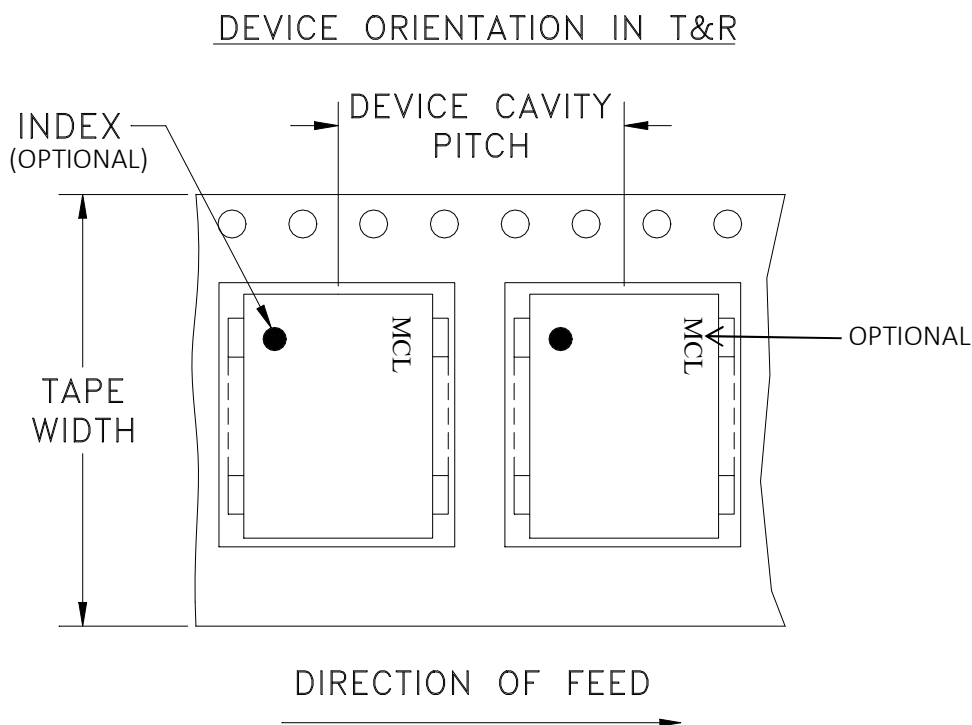

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note	
16	12	7	Small quantity standard (see note)	20
				50
				100
				200
		13	Standard	500
1000				

Note: Availability of small reel quantity varies by model.  
Refer to pricing and availability on individual model dashboard.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)



INTERNET <http://www.minicircuits.com>



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

# Evaluation Board and Circuit


For Pin Connections refer to Data Sheet of the DUT

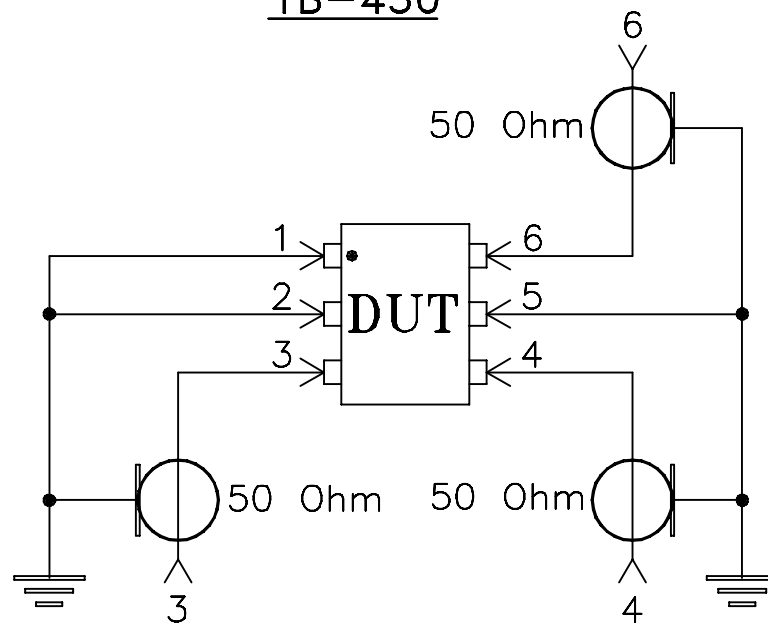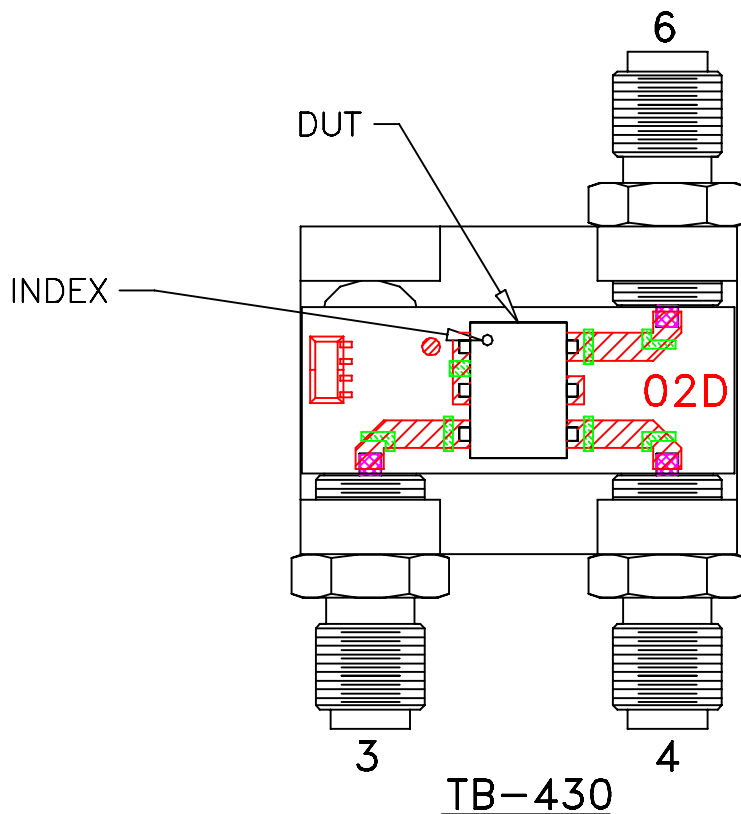

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent, Dielectric Constant=3.5, Thickness=.030 inch.
3. Must use ENA/PNA type agilent's network analyzers with impedance conversion option to convert ports to appropriate impedances.

 Mini-Circuits®

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-20° to 85°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Thermal Shock	-55° to 100°C, 100 cycles	MIL-STD-202, Method 107, Condition A-3, except +100°C
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A
Marking Resistance to Solvents	Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; distilled water + proylene glycol monomethyl ether + monoethanolamine at 63°C to 70°C	MIL-STD-202, Method 215