

# Ceramic Bandpass Filter

## BFCG-1952+

50Ω 16.80 to 21.0 GHz

### The Big Deal

- Low Insertion Loss – Mid band 0.9dB typical
- Pick and place standard case style
- Small size 2.0mm x 1.25mm
- High quality distributed filter topology



CASE STYLE: GE0805C-13

### Product Overview

The BFCG-1952+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance at mmWave frequencies, by utilizing a proprietary LTCC material system and distributed filter topology. The passband loss at 16.8-21GHz is as low as 0.9dB, with typical stopband rejections at 25dB up to 38.5GHz. This model handles up to 1W RF input power, and provides a wide operating temperature range from -55 to +125°C.

### Key Features

Feature	Advantages
Proprietary mmWave compatible LTCC material system	Low loss and repeatable performance on a lot to lot basis up to mmWave frequencies.
Cost effective	LTCC is scalable technology that is cost effective due to ease of production in high quantities.
Small size (2.0mm x 1.25mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Ceramic Bandpass Filter

50Ω 16.8 to 21.0 GHz

## BFCG-1952+



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-13

### Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

### Applications

- Satcom


**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications<sup>1</sup> at 25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—		18.8		GHz	
	Insertion Loss	F1-F2	16.8 - 21.0	—	0.9	2.5	dB
	Return Loss	F1-F2	16.8 - 21.0	—	15		dB
Stop Band, Lower	Insertion Loss	DC-F3	0.1 - 10.8	20	24	—	dB
		F3-F4	10.8 - 11.9	14	18	—	
Stop Band, Upper	Insertion Loss	F4-F5	26.3 - 28	13	18	—	dB
		F5-F6	28 - 38.5	20	25	—	

1. Measured on Mini-Circuits Test Board TB-BFCG-1952C+ with feedline losses removed by normalization of S12 and S21 traces to measurement of TB thru-line.

### Functional Schematic




### Maximum Ratings

Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input	1W at 25°C




Permanent damage may occur if any of these limits exceeded.

### Typical Frequency Response

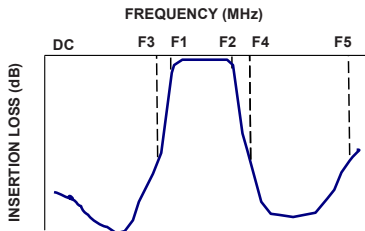

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
1000	54.73	0.46
5000	39.13	0.74
10800	23.96	1.25
11900	18.37	1.79
14000	11.12	2.02
15000	5.73	3.39
16800	0.82	15.00
18000	0.71	25.03
19000	0.75	20.83
20000	0.77	21.78
21000	0.95	20.44
22000	1.31	23.54
23000	4.60	5.60
24000	10.78	2.96
26300	21.58	3.02
30000	49.01	1.99
38500	26.95	4.36
45000	2.68	16.71
50000	5.38	8.10

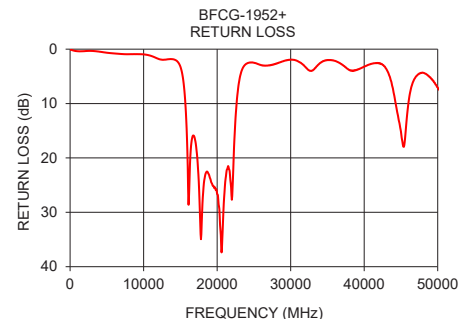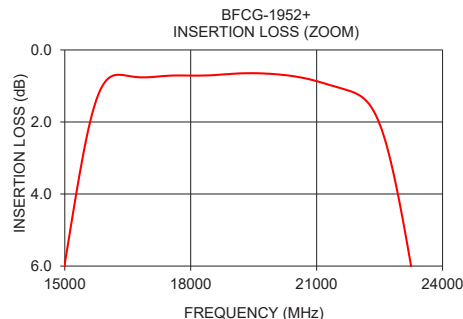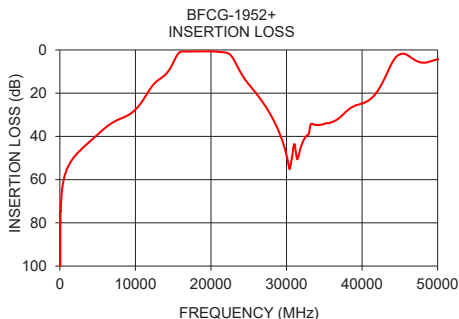

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)


REV. OR  
ECO-004774  
BFCG-1952+  
WY/CP/AM  
201022  
Page 2 of 3

## Pad Connections

INPUT	1
OUTPUT	3
GROUND	2

## Product Marking: ME

**Demo Board MCL P/N: TB-BFCG-1952C+  
Suggested PCB Layout (PL-689)**

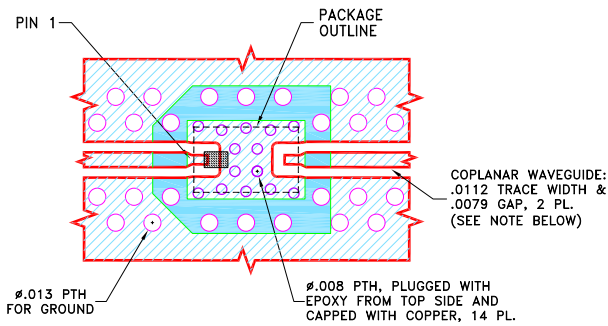


### NOTES:

- TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS: .0066±.0007; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE GE0805C-13 RECOMMENDATIONS.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

## Outline Drawing

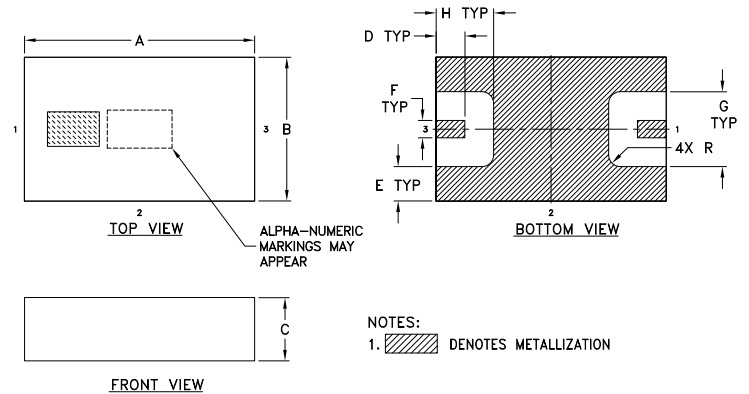

## Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H	wt
.079	.049	.022	.010	.012	.006	.026	.020	grams
2.01	1.24	0.56	0.25	0.30	0.15	0.66	0.51	0.011





### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
100	77.58	0.14
200	68.59	0.21
300	65.56	0.26
400	61.79	0.31
500	60.49	0.34
600	58.74	0.38
700	57.58	0.41
800	56.64	0.43
900	55.42	0.44
1000	54.73	0.46
2000	49.03	0.43
3000	45.23	0.37
4000	42.17	0.52
5000	39.13	0.74
6000	35.99	0.89
7000	33.53	0.98
8000	32.00	1.01
9000	30.31	1.02
10000	27.42	1.07
10800	23.96	1.25
11000	22.95	1.33
11200	21.93	1.42
11400	20.88	1.52
11600	19.85	1.62
11800	18.86	1.73
11900	18.37	1.79
12000	17.91	1.83
13000	14.28	2.03
14000	11.12	2.02
15000	5.73	3.39
16000	0.96	19.50
16800	0.82	15.00
17000	0.81	15.43
17200	0.77	16.97
17400	0.73	19.82
17600	0.71	24.45
17800	0.70	28.48
18000	0.71	25.03
18200	0.73	21.71
18400	0.75	20.14
18600	0.76	19.73
18800	0.76	20.05
19000	0.75	20.83
19200	0.75	21.55
19400	0.75	21.65
19600	0.76	21.21
19800	0.77	21.12
20000	0.77	21.78
20200	0.78	23.59
20400	0.80	26.80
20600	0.83	27.96
20800	0.88	23.88
21000	0.95	20.44
22000	1.31	23.54
23000	4.60	5.60
24000	10.78	2.96
25000	16.04	2.67
26300	21.58	3.02
27000	24.81	3.18
27500	27.58	3.10
28000	30.84	2.88
29000	38.47	2.28
30000	49.01	1.99
35000	33.94	2.26
38500	26.95	4.36
40000	25.63	3.17
45000	2.68	16.71
50000	5.38	8.10

## Typical Performance Curves

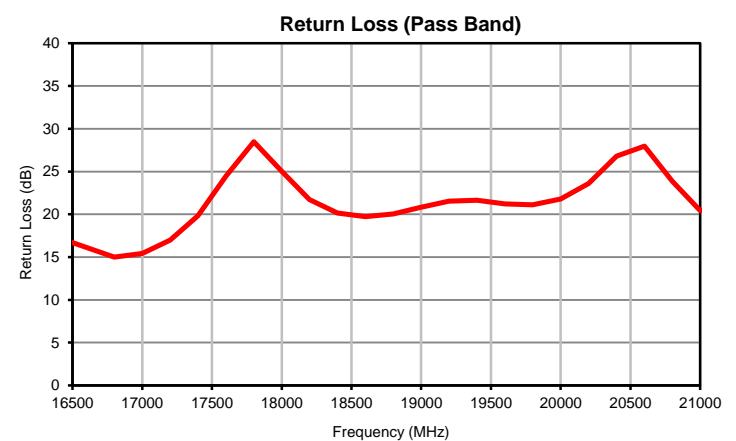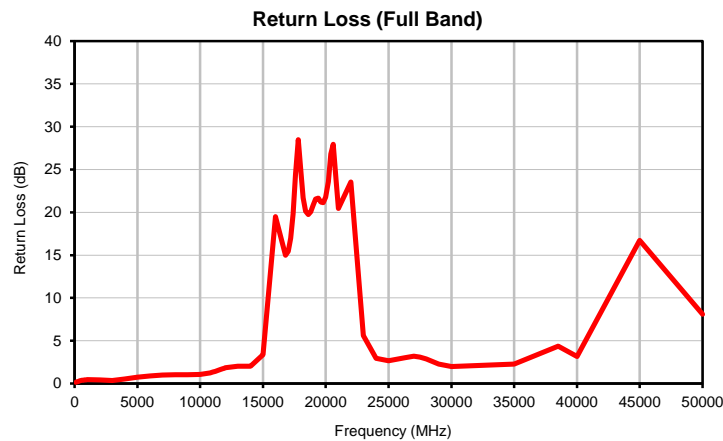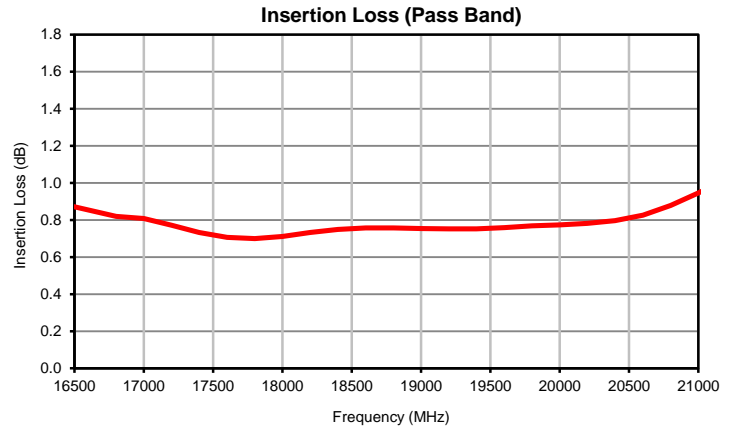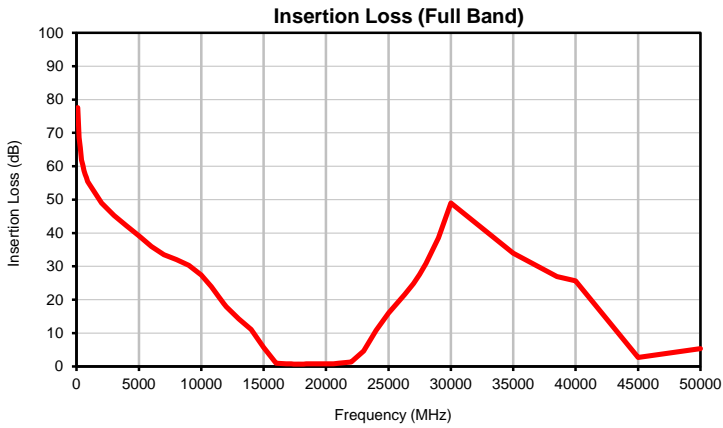


## Outline Dimensions

GE0805C-13

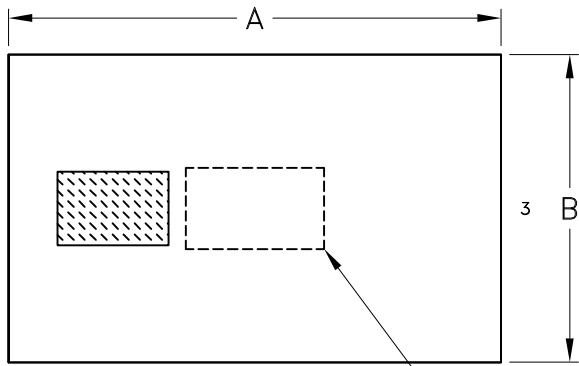


**TOP VIEW**


ALPHA-NUMERIC MARKINGS MAY APPEAR

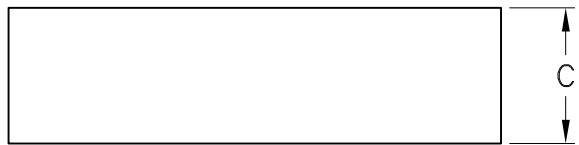

**FRONT VIEW**

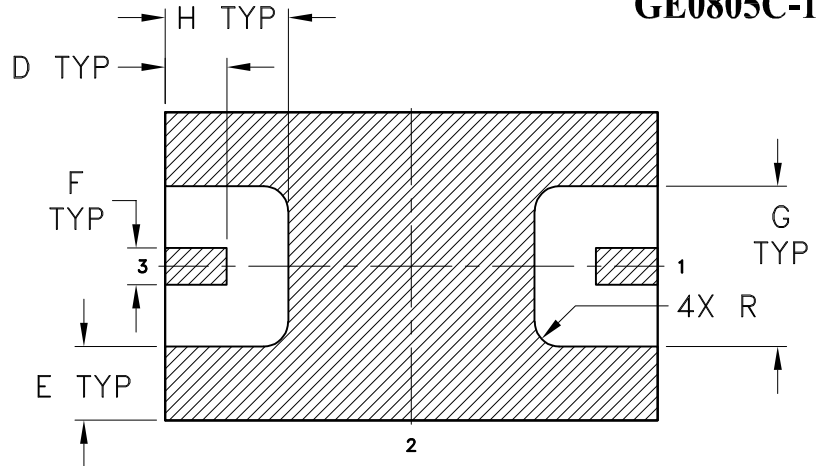

**BOTTOM VIEW**

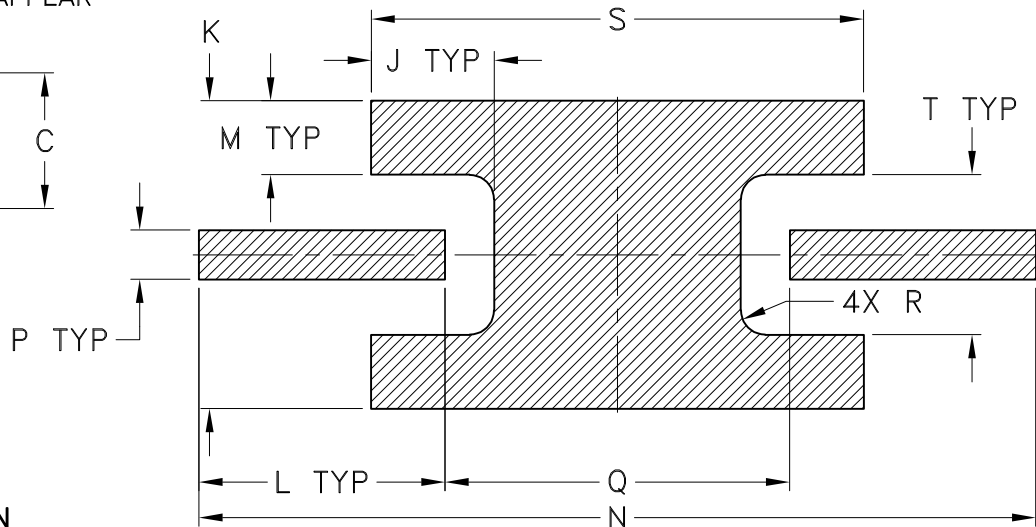

**Suggested Layout,**  
Tolerance to be within  $\pm .002[.05]$

**NOTES:**

1. DENOTES METALLIZATION

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
GE0805C-13	.079 (2.00)	.049 (1.25)	.022 (.55)	.010 (.25)	.012 (.30)	.006 (.15)	.026 (.65)	.020 (.50)	.020 (.50)	.049 (1.25)	.039 (1.00)	.012 (.30)	.134 (3.40)	.008 (.20)	.055 (1.40)	.004 (.10)

CASE#	S	T	WT, GRAM
GE0805C-13	.079 (2.00)	.026 (.65)	0.011

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01(.25)$ ; 3 Pl.  $\pm .005(.100)$

**Notes:**

- Open style, ceramic base.
- Termination finish: For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.  
For RoHS-5 Case Styles: Tin-Lead plate over Nickel plate. All models, no (+) suffix.




P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS


THIRD ANGLE PROJECTION



REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-003933	NEW RELEASE	03/04/20	ITG	IL

SUGGESTED MOUNTING CONFIGURATION  
FOR GE0805C-13 CASE STYLE

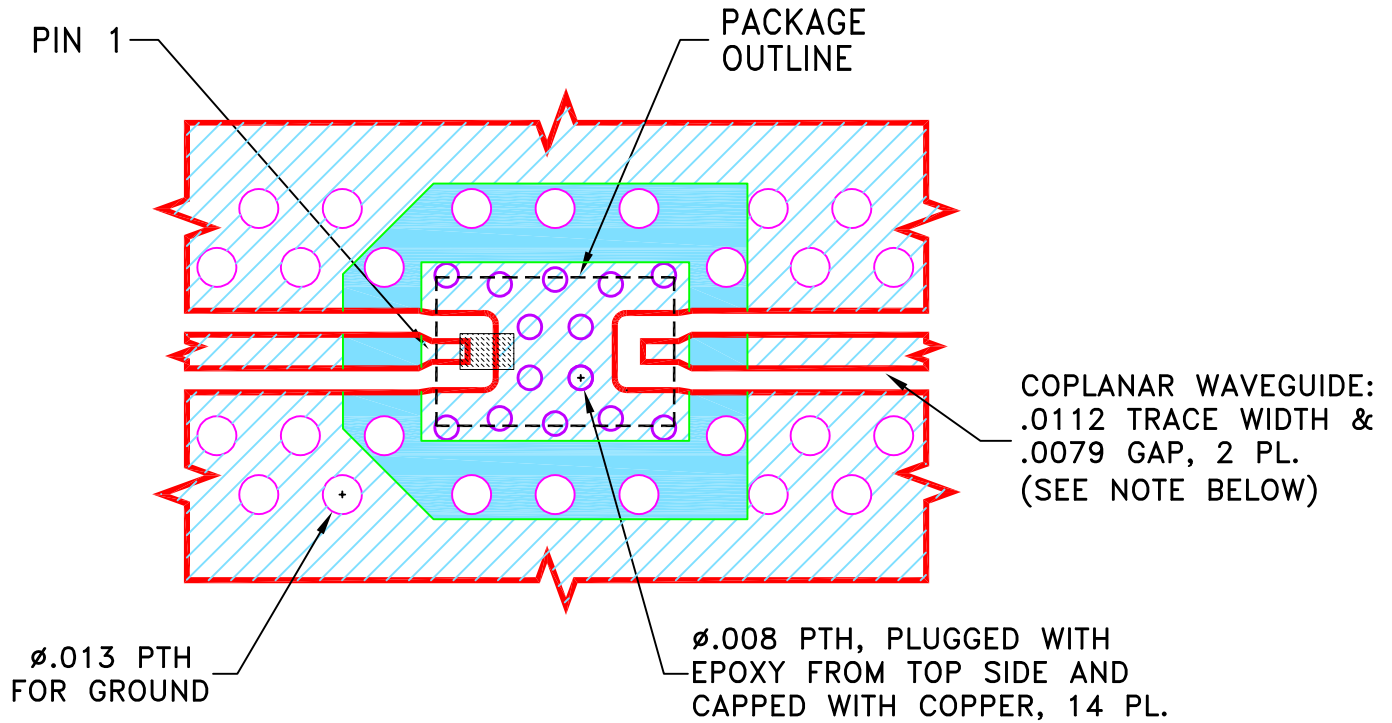

**NOTES:**

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS R04350B, DIELECTRIC THICKNESS:  $.0066 \pm .0007$ ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. UNIT FOOT PRINT IS OPTIMIZED FOR PERFORMANCE AND IS DIFFERENT FROM CASE STYLE GE0805C-13 RECOMMENDATIONS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE
DIMENSIONS ARE IN INCHES	DRAWN	ITG	09/03/20
TOLERANCES ON:	CHECKED	GF	09/03/20
2 PL DECIMALS $\pm$	APPROVED	IL	09/03/20
3 PL DECIMALS $\pm$ .005			
ANGLES $\pm$			
FRACTIONS $\pm$			

**Mini-Circuits<sup>®</sup>** 13 Neptune Avenue  
Brooklyn NY 11235


PL, GE0805C-13, TB-BFCG-XXXXC+

Mini-Circuits<sup>®</sup>  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.


ASHEETA1.DWG REV:A DATE:01/12/95

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-689	OR
FILE:	98PL689	SCALE:	SHEET:
		15:1	1 OF 1

# Evaluation Board and Circuit

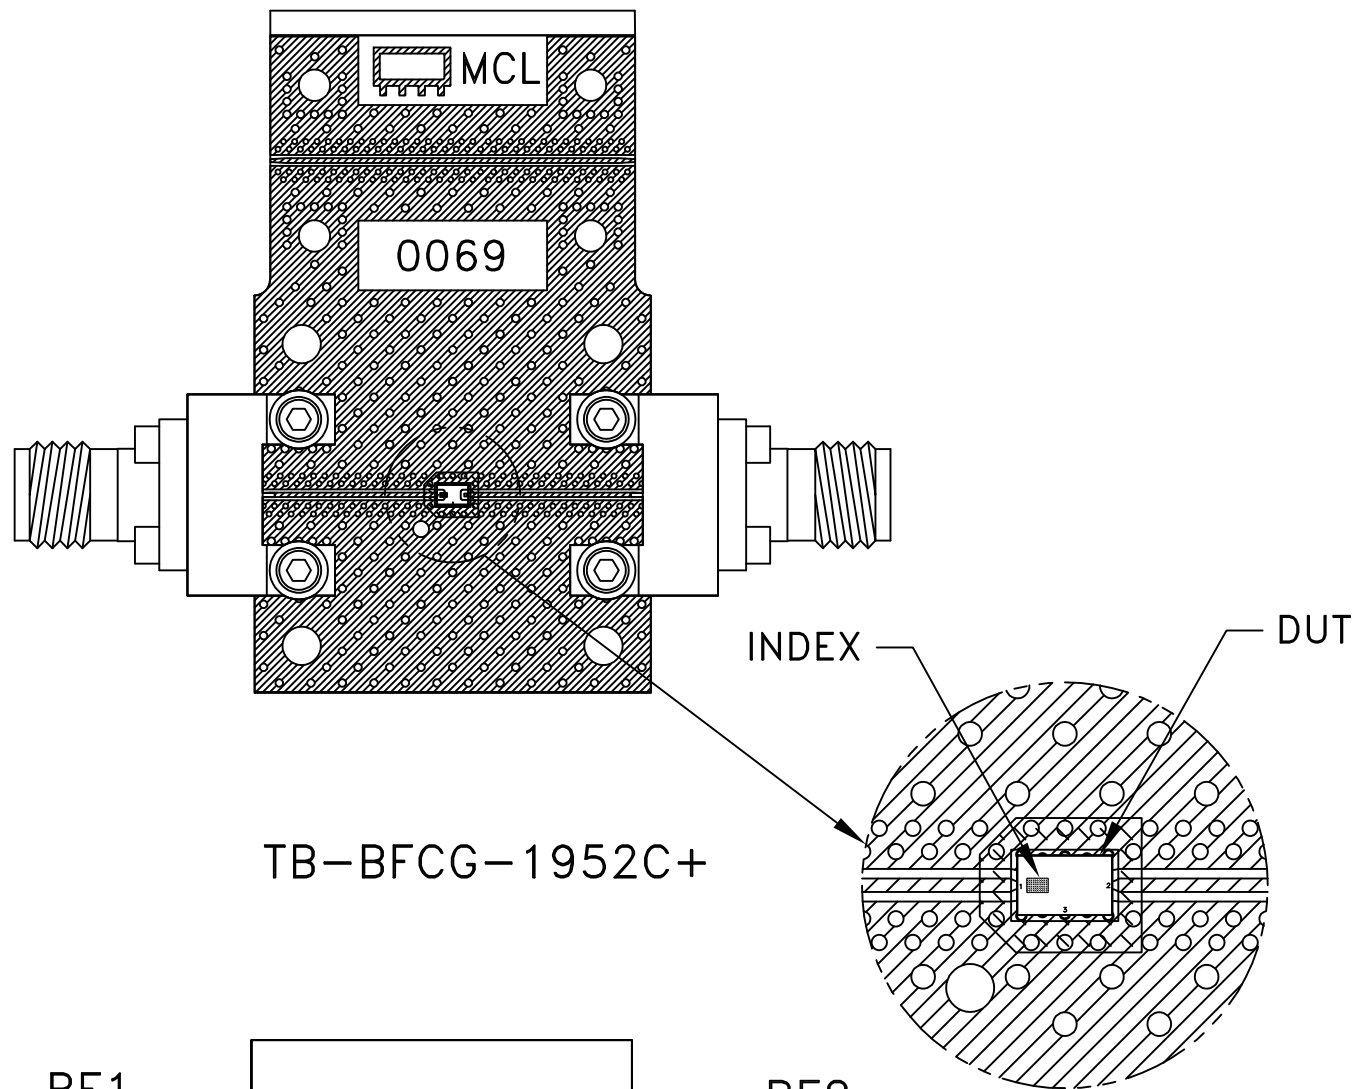


TB-BFCG-1952C+

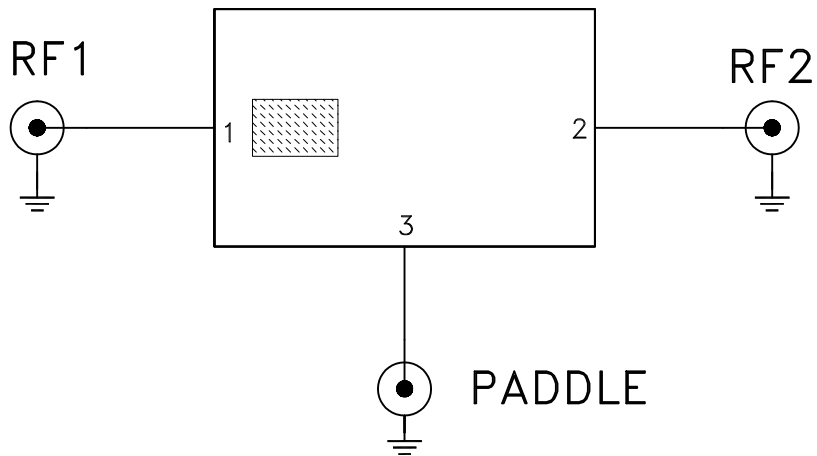

Schematic Diagram

## Notes:

1. 50 Ohm 2.40mm Female end launch connectors.
2. PCB Material: R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.0066 inch.

 Mini-Circuits®





## Environmental Specifications ENV06T8

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Thermal Cycling	-55 to 125°C, 100 cycles, Dwell Time 15 minutes.	MIL-STD-202, Method 107, Condition A-3
Mechanical Shock	50g, 11ms half-sine, 18 shocks applied each to 3 axes	MIL-STD-202 Method 213, Condition A
Vibration	10-2000Hz sine, 20g, 12 cycles applied each to 3 axes	MIL-STD-202, Method 204, Condition D
Constant Acceleration	30Kg, Y1 Direction	MIL-STD-883, Method 2001, Condition E
Humidity	85°C, 90-95% Relative Humidity, 250hours	
Solderability	10X / 30X Magnification	J-STD-002C Test S, J-STD-002C Test S1
High Temp Storage	125°C, 250 hours	