

Ceramic

Bandpass Filter


BFCN-1801+

50Ω

1400 to 2320 MHz

The Big Deal

- Small size 3.2mm x 1.6mm
- Pass band (1400-2320 MHz)
- High rejection over wide band



CASE STYLE: FV1206-7

Product Overview

The BFCN-1801+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. Covering 1400 to 2320 MHz, these units offer excellent rejection over a wide stopband.

Key Features

Feature	Advantages
Small Size (3.20mm x1.6 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Rejection peaks close to pass band	Provides good rejection of signals close to the pass band, for improved system performance.
Wide stopband	No regrowth at 2nd and 3rd harmonics permits filter to be used in presence of wideband undesired signals.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

Ceramic

Bandpass Filter

50Ω

1400 to 2320 MHz

BFCN-1801+

Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

Applications

- Harmonic Rejection
- Transmitters / Receivers



Generic photo used for illustration purposes only

CASE STYLE: FV1206-7


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input	1W max.

Permanent damage may occur if any of these limits are exceeded.




Bottom View



Pad Connections

Input	1
Output	3
Ground	2

Functional Schematic



Electrical Specifications^{1,2} at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—		1802		MHz
	Insertion Loss	F1-F2	—	1.5	3.0	dB
	Return Loss	F1-F2	—	17	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	20	25	—	dB
Stop Band, Upper	Insertion Loss	F4-F5	20	33	—	dB
		F5-F6	15	24	—	dB





1. Measured on Mini-Circuits Characterization Test Board TB-812+.

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
200	69.27	0.02
500	33.17	0.16
1000	28.91	0.75
1200	7.29	4.00
1400	1.36	21.62
1800	0.94	18.65
2200	1.00	32.10
2600	4.82	4.69
3100	34.71	0.42
3500	39.25	0.24
4000	36.39	0.18
5000	33.44	0.30
6000	30.67	0.34
7000	31.32	0.41
8000	25.28	0.40

Specification Definition

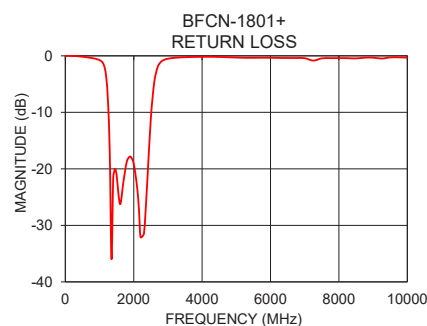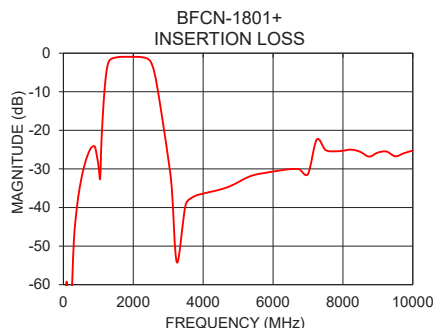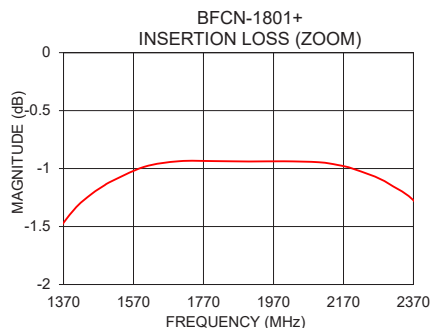


www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
ECO-002304
BFCN-1801+
BK/CP/AM
200331
Page 2 of 3


Bandpass Filter

BFCN-1801+


Outline Drawing

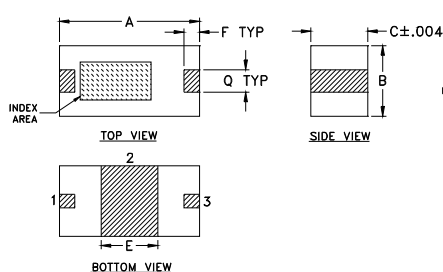

PCB Land Pattern

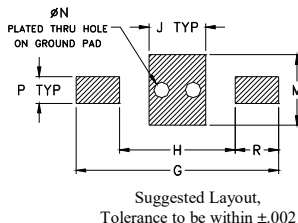

Demo Board MCL P/N: TB- 812+ Suggested PCB Layout (PL-439)

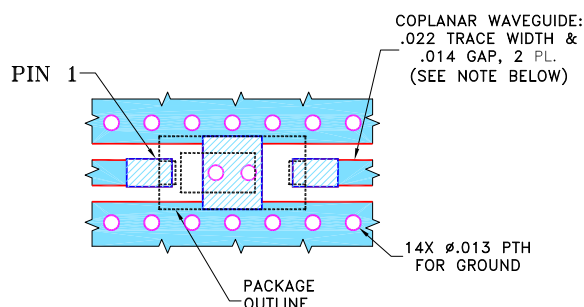

NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS $.010" \pm .001"$, COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Product Marking: N/A

Pad Connections

Input	1
Output	3
Ground	2

Outline Dimensions (inch/mm)

A	B	C	E	F	G	H
.126	.063	.051	.051	.014	.183	.104
3.20	1.60	1.30	1.30	0.36	4.65	2.64
J	M	N	P	Q	R	Wt
.051	.063	.014	.024	.020	.039	grams
1.30	1.60	0.36	0.61	0.51	0.99	.020

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp







Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
10	73.63	0.02
55	62.92	0.00
100	59.37	0.00
200	69.27	0.02
300	48.50	0.05
400	38.98	0.09
500	33.17	0.16
600	29.14	0.23
700	26.28	0.32
800	24.47	0.42
900	24.24	0.55
1000	28.91	0.75
1050	32.63	0.94
1077	25.87	1.09
1100	20.80	1.29
1150	12.91	2.07
1200	7.29	4.00
1250	3.78	8.42
1300	2.18	17.34
1350	1.59	35.99
1400	1.36	21.62
1450	1.22	20.01
1488	1.14	20.65
1500	1.12	21.07
1600	0.99	26.24
1700	0.94	22.22
1800	0.94	18.65
1900	0.94	17.82
2000	0.94	19.10
2100	0.95	23.30
2153	0.97	27.30
2200	1.00	32.10
2300	1.13	31.41
2400	1.40	21.84
2500	2.24	11.08
2600	4.82	4.69
2700	9.53	1.98
2800	15.16	1.05
2900	21.08	0.69
2976	25.78	0.54
3100	34.71	0.42
3250	54.25	0.33
3500	39.25	0.24
3750	37.12	0.20
4000	36.39	0.18
4250	35.87	0.17
4500	35.30	0.20
4750	34.56	0.25
5000	33.44	0.30
5250	32.25	0.35
5500	31.47	0.35
5750	31.06	0.34
6000	30.67	0.34
6250	30.33	0.37
6500	30.05	0.38
6750	30.10	0.39
7000	31.32	0.41
7250	22.41	0.84
7500	25.07	0.44
7750	25.44	0.41
8000	25.28	0.40
8250	25.00	0.42
8500	25.58	0.45
8750	26.81	0.33
9000	25.76	0.32
9250	25.50	0.48
9500	26.73	0.28
9750	25.91	0.27
10000	25.25	0.32

Ceramic Bandpass Filter

BFCN-1801+

Typical Performance Curves

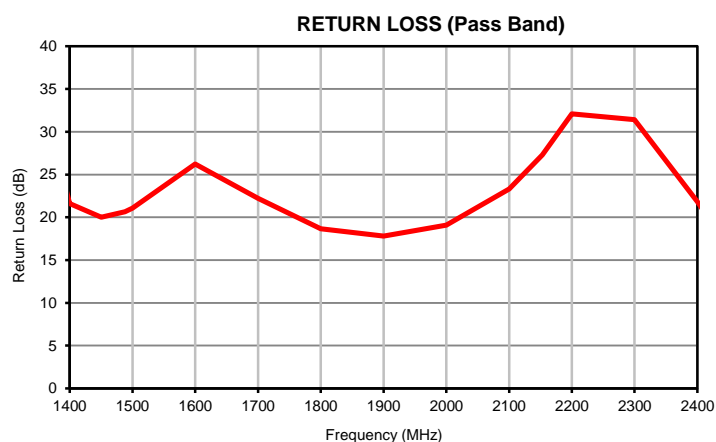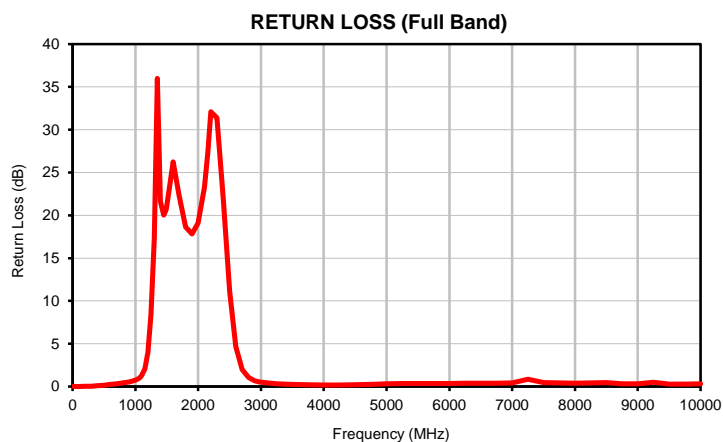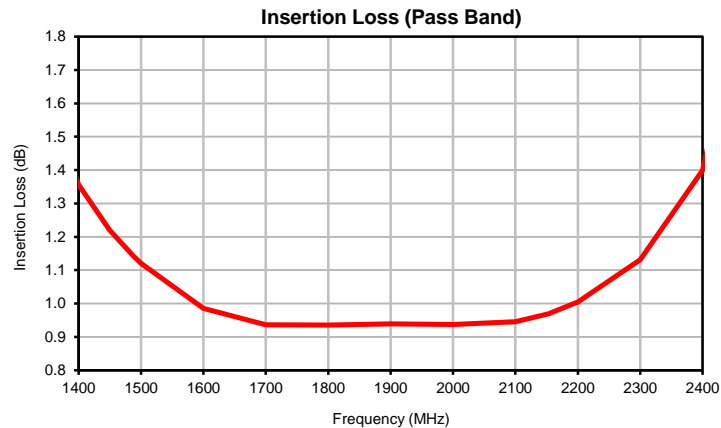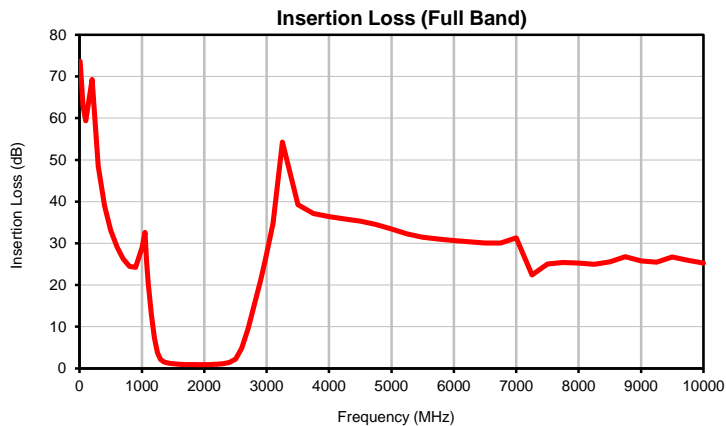

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site
The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com




IF/RF MICROWAVE COMPONENTS




REV. OR
BFCN-1801+
5/1/2020
Page 1 of 1

Outline Dimensions

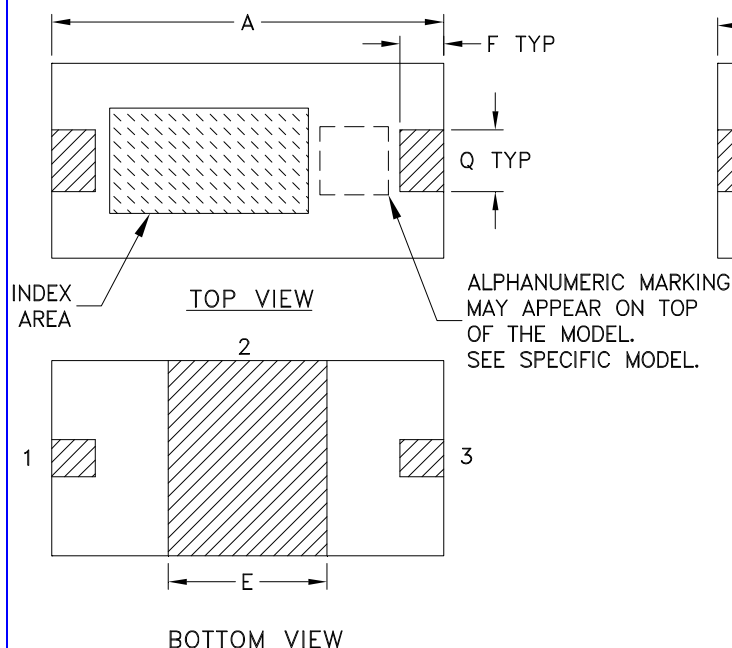

PCB Land Pattern

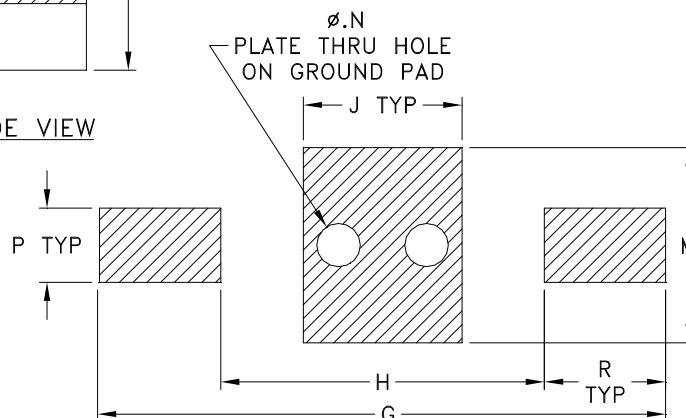

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
FV1206-7	.126 (3.20)	.063 (1.60)	.051 (1.30)	-- --	.051 (1.30)	.014 (0.35)	.183 (4.65)	.104 (2.65)	.051 (1.30)	-- --	-- --	.063 (1.60)

CASE #	N	P	Q	R	S	WT. GRAM
FV1206-7	.014 (0.35)	.024 (0.60)	.020 (0.50)	.039 (1.00)	-- --	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

1. Open style, ceramic base.
2. Termination finish: **as shown below or indicated on Data Sheet.**
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.
For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.
3. Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

DEVICE ORIENTATION IN T&R

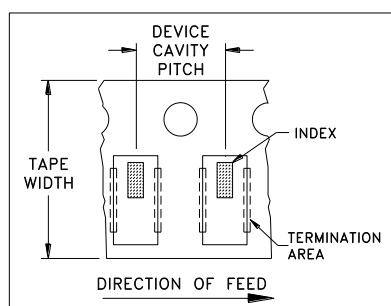


ILLUSTRATION 1

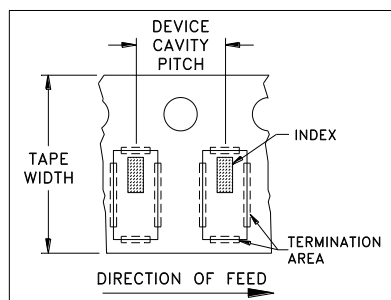


ILLUSTRATION 2

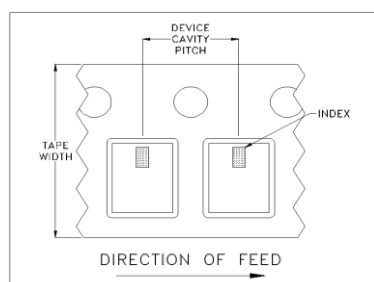


ILLUSTRATION 3

Applicable Case Styles

FV1206-1
FV1206-3

Applicable Case Styles

FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9

Applicable Case Styles

FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	3000

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf

Mini-Circuits ISO 9001 & ISO 14001 Certified

Mini-Circuits®


INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

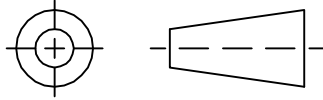

REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148536	NEW RELEASE	10/14/14	GF	MY


SUGGESTED MOUNTING CONFIGURATION
FOR FV1206-7 CASE STYLE, "03FL02" PIN CODE

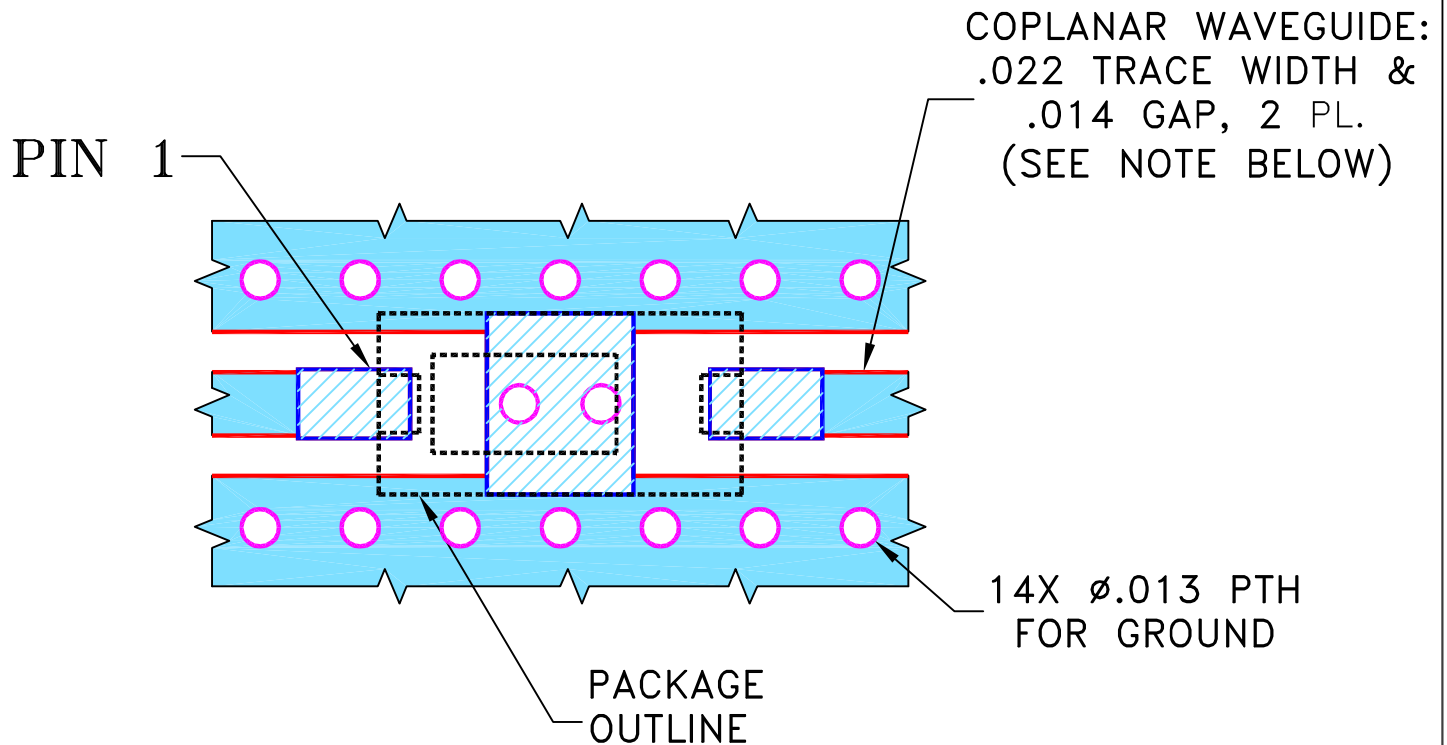NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" \pm .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
 2 PL DECIMALS \pm
 3 PL DECIMALS \pm .005
 ANGLES \pm
 FRACTIONS \pm



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95




Mini-Circuits®

13 Neptune Avenue
 Brooklyn NY 11235


PL, 03FL02, FV1206-7, TB-812+

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-439	REV: OR
FILE: 98PL439	SCALE: 15:1	SHEET: 1	OF 1

Evaluation Board and Circuit

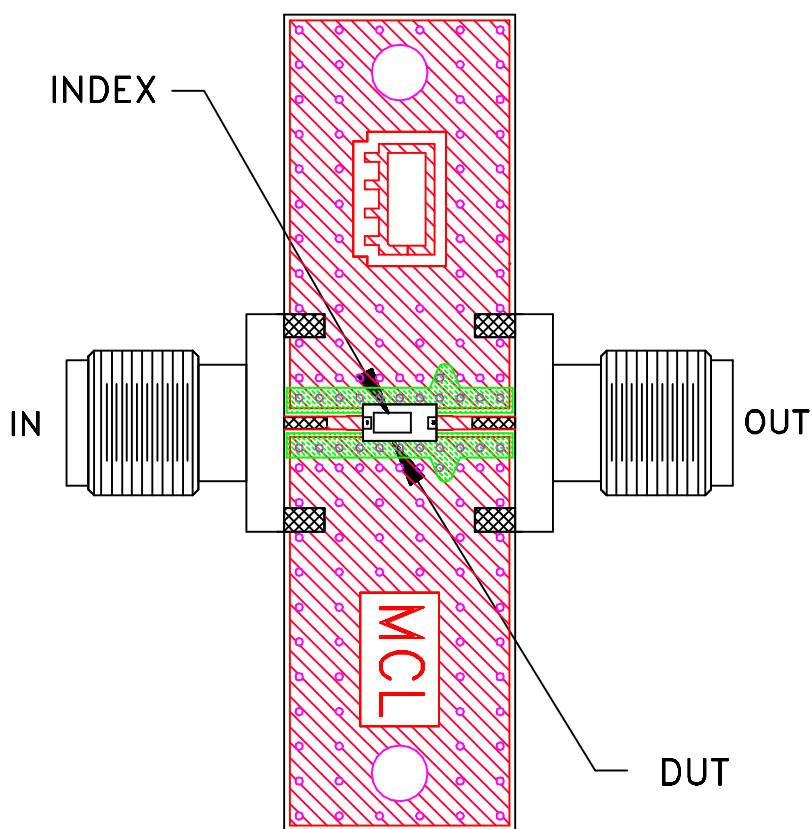


TB-812+

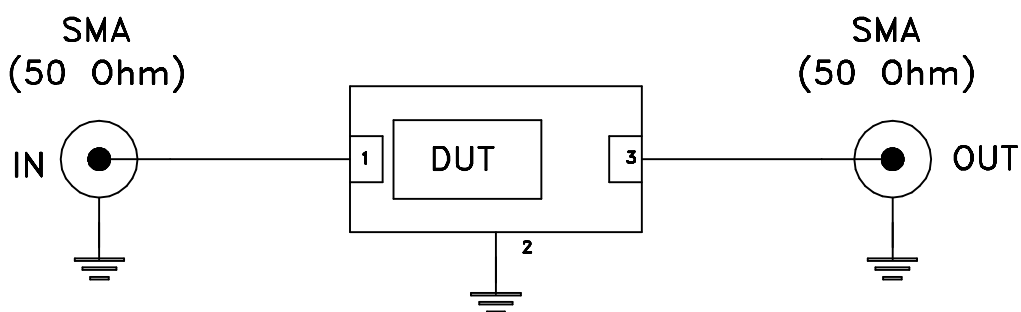

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A