Ceramic

Bandpass Filter

BFCN-1860AT+

50Ω 1580 to 2200 MHz

The Big Deal

- LTCC construction
- Temperature stable from -40 to +105°C
- Small size (0.126 x .063 X .037")
- AEC-Q200 qualified component family



CASE STYLE: FV1206-4

Product Overview

The BFCN-1860AT+ LTCC bandpass filter covers the 1580 to 2200 MHz passband with 2 dB passband insertion loss and 20 dB upper/lower stopband rejection. This model handles up to 2.5W RF input power and provides a wide operating temperature range from -40 to +105°C. Utilizing LTCC multi-layer construction, the filter achieves excellent repeatability of performance and comes in a tiny 1206 ceramic package with wraparound terminations, minimizing performance variations due to parasitics and saving space in dense PCB layouts.

Key Features

Feature	Advantages
LTCC Construction	Provides a rugged package well suited for tough environments such as high humidity and temperature extremes.
Tiny size (0.126 x .063 x .037")	Saves space in dense circuit boards and minimizes the effects of parasitics.
Wrap-around terminations	Provides excellent solderability and easy visual inspection
Wide operating temperature range, -40 to +105°C	Enables reliable performance in extreme environments

Ceramic

Bandpass Filter

1580 to 2200 MHz 50Ω

Features

- Good VSWR, 1.5:1 typ. @ passband
- Small size(0.126 x .063 x .037)
- Temperature stable
- LTCC construction
- · AEC-Q200 qualified component family

Applications

Automotive

BFCN-1860AT+



Generic photo used for illustration purposes only


CASE STYLE: FV1206-4


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Specification Definition






Functional Schematic



Top View



Pad Connections

Input	1
Output	3
Ground	2,4

Electrical Specifications^{1,2} at 25°C

Parameter		F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_			1860		MHz
Pass Band	Insertion Loss	F1 - F2	1580 - 2200	_	2.0	3.5	dB
	VSWR	F1 - F2	1580 - 2200	_	1.5	2.5	:1
Otan Daniel Lauren	Insertion Loss	DC - F3	1300	_	20	_	dB
Stop Band, Lower	VSWR	DC - F3	1300	_	20	_	:1
Ston Bond Unner	Insertion Loss	F4 - F5	2600 - 4800	_	20	_	dB
Stop Band, Upper	VSWR	F4 - F5	2600 - 4800	_	15	_	:1


- 1. Measured on Mini-Circuits Characterization Test Board TB-824+ using BFCN-1860+.
- 2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Maximum Ratings

Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +105°C
RF Power Input*	2.5 W at +25°C

*Passband rating, derate linearly to 0.7 W at +105°C ambient Permanent damage may occur if any of these limits are exceeded.



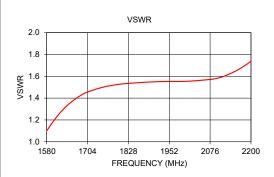





Full Band Performance

Pass Band Performance


Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Insertion Loss (dB)	Group Delay (nsec)
10	81.30	72.38	1580	1.78	1.06
40	72.24	67.32	1600	1.71	0.98
100	57.92	60.68	1620	1.66	0.93
400	35.41	43.01	1640	1.62	0.87
1000	24.12	22.58	1660	1.61	0.82
1300	19.87	10.75	1700	1.58	0.75
1580	1.78	1.10	1750	1.56	0.70
1660	1.61	1.38	1800	1.54	0.66
2000	1.56	1.55	1850	1.53	0.63
2200	2.00	1.74	1900	1.53	0.62
2600	24.98	5.02	1950	1.54	0.62
3000	27.70	17.47	2000	1.56	0.62
3500	37.29	23.88	2050	1.60	0.64
4100	31.00	24.03	2100	1.68	0.66
4800	30.01	2.93	2200	2.00	0.74

Pad Connections

Input	1
Output	3
Ground	2,4

Product Marking: F8


Outline Drawing



Outline Dimensions (inch)

J	Н	G	F	E	D	С	В	Α
.069	.104	.182	.012	.075	.026	.037	.063	.126
1.75	2.64	4.62	0.30	1.91	0.66	0.94	1.60	3.20
wt		R	Q	Р	N	М	L	K
grams		.039	.020	.024	.013	.039	.041	.119
.020		0.99	0.51	0.61	0.33	0.99	1.04	3.02

Demo Board MCL P/N: TB-824+ Suggested PCB Layout (PL-454)

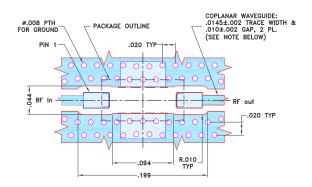

- NOTES:

 1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS. JOBGO®*±.0007**. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.

 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER). DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this speci fication document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




Case Style




FV1206-4

Outline Dimensions

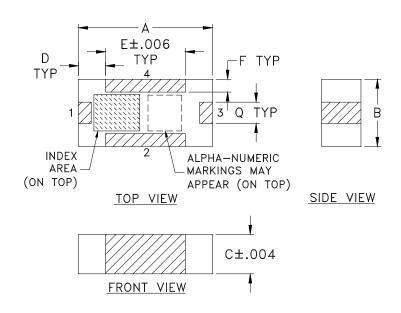

PCB Land Pattern

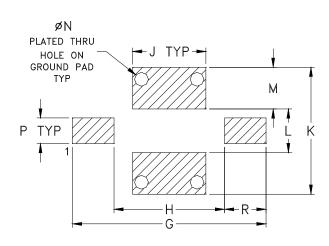

Suggested Layout, Tolerance to be within ±.002

CASE#	A	В	С	D	Е	F	G	Н	J	K	L	M
FV1206-4	.126	.063	.037	.026	.075	.012	.182	.104	.069	.119	.041	.039
	(3.20)	(1.60)	(0.94)	(0.66)	(1.91)	(0.30)	(4.62)	(2.64)	(1.75)	(3.02)	(1.04)	(0.99)

CASE#	N	P	Q	R	WT. GRAM
FV1206-4	.013 (0.33)	.024 (0.61)	.020 (0.51)	.039 (0.99)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

- 1. Open style, ceramic base.
- 2. Termination finish: as shown below or indicated on Data Sheet.

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


Trovides Actoric Data instantly from winti-on corrorat. WWW.mi


RF/IF MICROWAVE COMPONENTS


Tape & Reel Packaging

TR-F75


DEVICE ORIENTATION IN T&R







Applicable Case Styles
FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9



Applicable Case Styles
FV1206-11
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10

ILLUSTRATION 3

ILLUSTRATION 1

ILLUSTRATION 2

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel		
8	4	7	Small quantity standards (see note)	20 50 100 200 500 1000	
			Standard	3000	

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152168	NEW RELEASE	07/31/15	ITG	AVB

SUGGESTED MOUNTING CONFIGURATION FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE

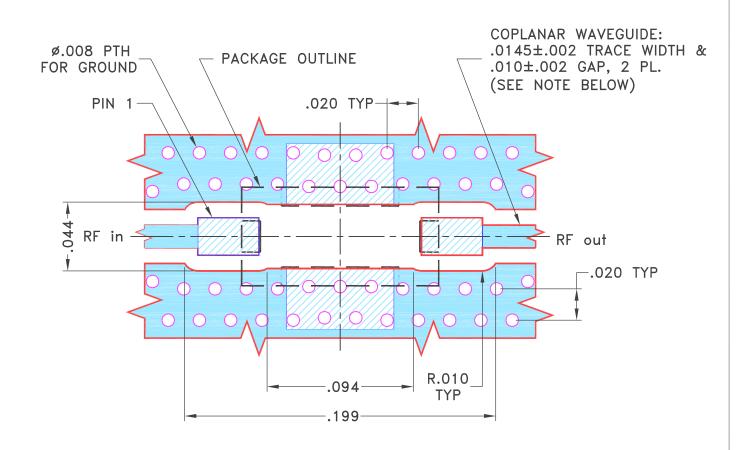

NOTES:

- 1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066"±.0007". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE					. d (R)			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	07/30/15] [Mini	1 – C	ırcu	itš	13 Neptu	ne Avei	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	07/31/15		Τ				Бгоокіуп	N1 114	233
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	AVB	07/31/15	1							
FRACTIONS ±] PI	., 04FL0)1. F	'V1206	-4.	TB-	824	<u> </u>
∭ Mini−Circuits ®					., 0 11 110	-, -	, 1,000	-,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED. IN WRITING, TO ITS VENDORS, VENDEE					CODE IDENT	DRAWING	NO.			REV:	
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE	15542	DRAWING		-PL-	454		OR
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					98PL454	SCALE:	16:1	SHEET:	1	OF	1