Bandpass Filter

BFCN-5540AT+

 50Ω 4620 to 6640 MHz

The Big Deal

- LTCC construction
- Temperature stable from -40 to +105°C
- Small size (0.12 x .06 X .03")
- AEC-Q200 qualified component family



Product Overview

The BFCN-5540AT+ LTCC bandpass filter covers the 4620 to 6640 MHz passband with 1.2 dB passband insertion loss, 22 dB lower stopband rejection, and 30 dB upper stopband rejection. This model handles up to 1W RF input power and provides a wide operating temperature range from -40 to +105°C. Utilizing LTCC construction, the filter achieves excellent repeatability of performance and comes in a tiny 1206 ceramic package with wraparound terminations, minimizing performance variations due to parasitics and saving space in dense PCB layouts.

Key Features

Feature	Advantages
LTCC Construction	Provides a rugged package well suited for tough environments such as high humidity and temperature extremes.
Tiny size (0.12 x .06 x .03")	Saves space in dense circuit boards and minimizes the effects of parasitics.
Wrap-around terminations	Provides excellent solderability and easy visual inspection
Wide operating temperature range, -40 to +105°C	Enables reliable performance in extreme environments

Ceramic

Bandpass Filter

50Ω 4620 to 6640 MHz

Features

- Small size
- Temperature stable
- LTCC construction
- AEC-Q200 qualified component family

Applications

Automotive

ATTENUATION (dB)

DC

BFCN-5540AT+



Generic photo used for illustration purposes only CASE STYLE: FV1206-4

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications



Electrical Specifications^(1,2) at +25°C

Para	imeter	F#	Frequency (MHz)	Min.	Тур.	Max.	Unit
	Center Frequency	_	_	_	5540	_	MHz
Pass Band	Insertion Loss	F1-F2	4620-6640	_	1.2	4	dB
	VSWR	F1-F2	4620-6640	_	2.1	_	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-3470	17	22	_	dB
Stop Barid, Lower	VSWR	DC-F3	DC-3470	_	25	_	:1
Cton Dand Llaner	Incortion Loss	F4-F5	8060-8820	13	30	_	dB
Stop Band, Upper	Insertion Loss	F5-F6	8820-10990	_	17	_	dB
	VSWR	F4-F6	8060-10990		25	_	:1

- 1. Measured on Mini-Circuits Characterization Test Board TB-824+ using BFCN-5540+.
- 2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.

Maximum Ratings


Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +105°C
RF Power Input*	1W at +25°C

*Passband rating, derate linearly to 0.25W at +105°C ambient Permanent damage may occur if any of these limits are exceeded.


Functional Schematic

FREQUENCY (MHz)

Specification Definition



Top View





Pad Connections

Input	1
Output	3
Ground	2,4


Typical Performance Data at +25°C


Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1000	36.33	65.08
2000	25.57	46.87
3400	37.28	39.50
4600	1.39	1.58
5000	1.48	1.95
6600	2.33	2.10
7000	3.54	1.62
7500	16.69	9.78
8000	38.25	15.07
8600	45.83	14.11
9000	35.68	14.34
9500	30.89	17.30
10000	29.47	22.09
10900	40.64	27.46
11000	38.85	26.92

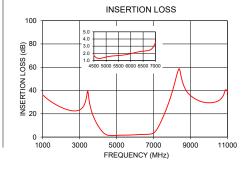



Outline Drawing





Tolerance to be within ±.002

Pad Connections


Input	1
Output	3
Ground	2,4

Product Marking: F6

Outline Dimensions (inch mm)

Α	В	С	D	Е	F	G	Н	J
.126	.063	.037	.026	.075	.012	.182	.104	.069
3.20	1.60	0.94	0.66	1.91	0.30	4.62	2.64	1.75
K	L	М	Ν	Р	Q	R		wt
K .119	L .041		N .013	-		R .039	,	wt grams

Demo Board MCL P/N: TB-824+ Suggested PCB Layout (PL-454)

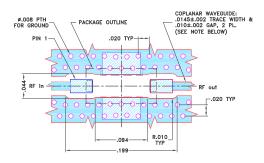

- NOTES:

 1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066"±.0007". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED. 2. BOTTOM SIDE OF THE PCE IS CONTINUOUS GROUND PLATE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html




Case Style




FV1206-4

Outline Dimensions

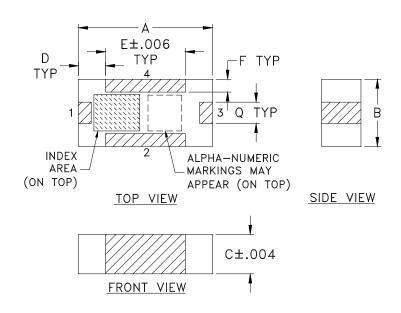

PCB Land Pattern

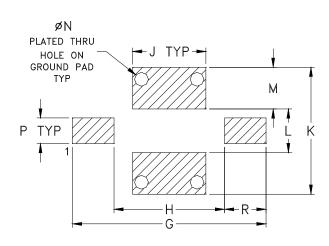

Suggested Layout, Tolerance to be within ±.002

CASE#	A	В	С	D	Е	F	G	Н	J	K	L	M
FV1206-4	.126	.063	.037	.026	.075	.012	.182	.104	.069	.119	.041	.039
	(3.20)	(1.60)	(0.94)	(0.66)	(1.91)	(0.30)	(4.62)	(2.64)	(1.75)	(3.02)	(1.04)	(0.99)

CASE#	N	P	Q	R	WT. GRAM
FV1206-4	.013 (0.33)	.024 (0.61)	.020 (0.51)	.039 (0.99)	.020

Dimensions are in inches (mm). Tolerances: 2 Pl. ± .01; 3 Pl. ± .005

Notes:

- 1. Open style, ceramic base.
- 2. Termination finish: as shown below or indicated on Data Sheet.

For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.

For RoHS-5 Case Styles: Tin-Lead plate. All models, no (+) suffix.





P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com


Trovides Actoric Data instantly from winti-on corrorat. WWW.mi


RF/IF MICROWAVE COMPONENTS


Tape & Reel Packaging

TR-F75


DEVICE ORIENTATION IN T&R







Applicable Case Styles
FV1206-4
FV1206-5
FV1206-6
FV1206-7
FV1206-9



Applicable Case Styles
FV1206-11
FV1206-12
GE0805C-18
NL1008C-6
NL1008C-7
NL1008C-9
NL1008C-10

ILLUSTRATION 3

ILLUSTRATION 1

ILLUSTRATION 2

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel		
8	4	7	Small quantity standards (see note)	20 50 100 200 500 1000	
			Standard	3000	

Note: Please consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf



INTERNET http://www.minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661


Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M152168	NEW RELEASE	07/31/15	ITG	AVB

SUGGESTED MOUNTING CONFIGURATION FOR FV1206-4 CASE STYLE, "04FL01" PIN CODE

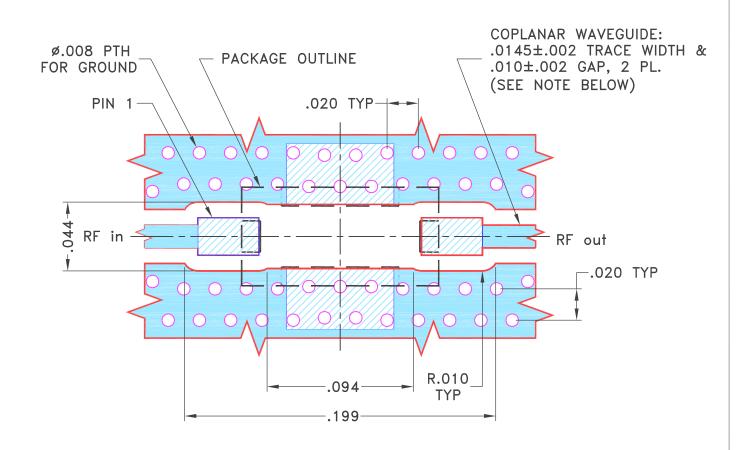

NOTES:

- 1. TRACE WIDTH PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066"±.0007". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE					. d (R)			
DIMENSIONS ARE IN INCHES	DRAWN	ITG	07/30/15] [Mini	1 – C	ırcu	its	13 Neptu	ne Avei	nue
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	07/31/15		Τ				Бгоокіуп	N1 114	200
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	AVB	07/31/15	1							
FRACTIONS ±] PI	., 04FL0)1. F	'V1206	-4.	TB-	824	<u> </u>
∭ Mini−Circuits ®					., 0 11 110	-, -	, 1,000	-,			
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED. IN WRITING, TO ITS VENDORS, VENDEE					CODE IDENT	DRAWING	NO.			REV:	
AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE				SIZE	15542	DRAWING		-PL-	454		OR
PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					98PL454	SCALE:	16:1	SHEET:	1	OF	1