



## Bandpass Filter

BFHKL-7851+

50Ω 6.7 to 8.6 GHz

## THE BIG DEAL

- LTCC Band Pass Filter with Integrated Interposer Board
- Wide Stopband Rejection, Typ. 42 dB Up to 18.5 GHz
- Shielded Construction
- Protected by US Patents 11,638,370 and 11,744,057




Generic photo used for illustration purposes only

## APPLICATIONS

- Test & Measurement Equipment
- Radar
- SATCOM
- Point-to-Point Radios

## FUNCTIONAL DIAGRAM

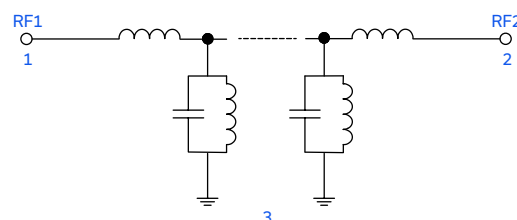

## PRODUCT OVERVIEW

BFHKL-7851+ is a miniature low temperature co-fired ceramic (LTCC) ultra-high stopband rejection band pass filter with a 6.7 to 8.6 GHz passband that supports a variety of applications. This model achieves 42 dB typical stopband rejection up to 18.5 GHz, when mounted on coplanar waveguide layouts. Housed in a small 4.95 mm by 3.65 mm ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The BFHKL family with integrated interposer board enables installation onto PCB layouts with automated manufacturing equipment. This model provides 3.4 dB typical insertion loss over a wide band due to its rugged monolithic construction. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

## KEY FEATURES

Features	Advantages
Surface Mountable Due to Integrated Interposer Board	Enables installation with automated manufacturing equipment making this suitable for high-volume processes.
Wide Rejection	Provides high stopband rejection of 42 dB typical up to 18.5 GHz.
Small Size (4.95x3.65 mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Wide Operating and Storage Temperature (-55 to +125°C)	Enables use in high reliability and extreme environment conditions, such as in aerospace & defense applications.
Cost Effective	LTCC is a scalable technology that is cost effective due to ease of production in high volume.



LTCC SURFACE MOUNT

## Bandpass Filter

BFHKL-7851+

50Ω 6.7 to 8.6 GHz

ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT +25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency <sup>4</sup>				7.7		GHz
	Insertion Loss	F2-F3	6.7-8.6		3.4	4.7	dB
	Return Loss	F2-F3	6.7-8.6		13		dB
Stopband, Lower	Rejection	DC-F1	0.1-4.6	60	70		dB
Stopband, Upper	Rejection	F4-F5	10.9-16.5	40	50		dB
			16.5-18.5	32	42		

1. Tested on Evaluation Board P/N TB-BFHKL-7851C+. Measured with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.

2. Bi-directional RF1 and RF2 ports can be interchanged.

3. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation  $\pm 4\%$ .


ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
Input Power <sup>6</sup>	1 W

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5 W at +125°C.

## TYPICAL FREQUENCY RESPONSE AT +25°C

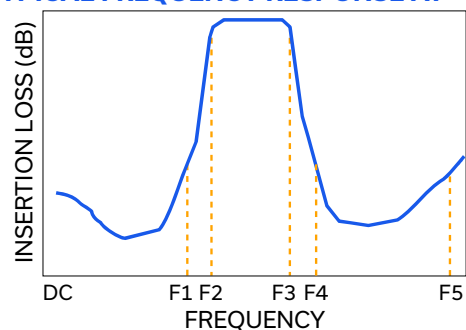



LTCC SURFACE MOUNT




# Bandpass Filter

**BFHKI-7851+**

Mini-Circuits

50Ω 6.7 to 8.6 GHz

## TYPICAL PERFORMANCE GRAPHS AT +25°C

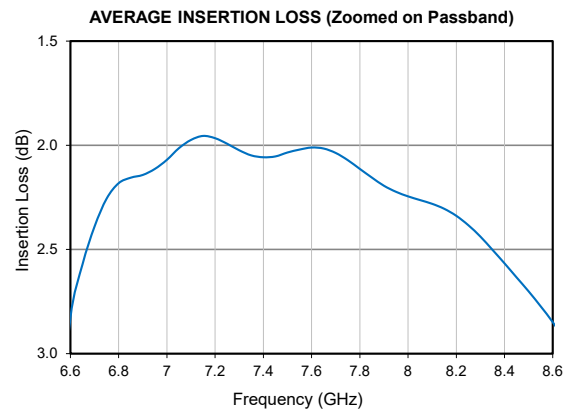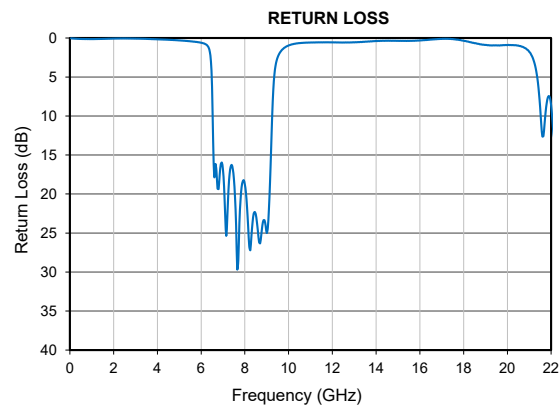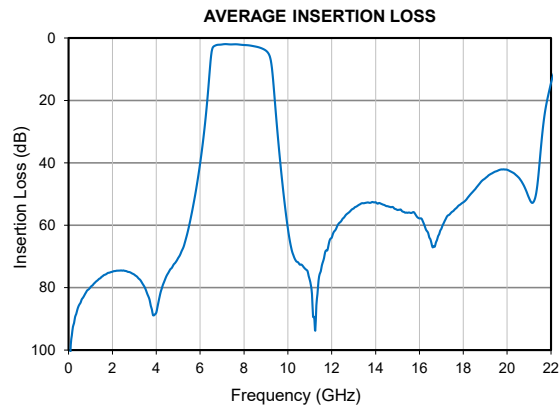



LTCC SURFACE MOUNT

# Bandpass Filter

**BFHKL-7851+**

50Ω 6.7 to 8.6 GHz

## FUNCTIONAL DIAGRAM


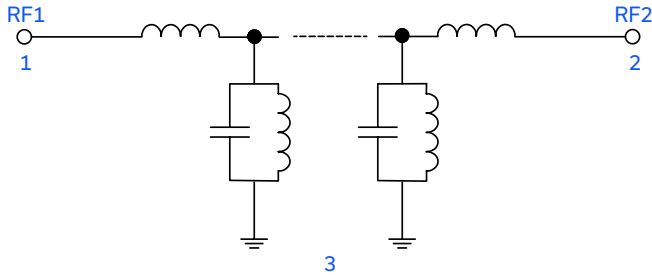


Figure 1. BFHKL-7851+ Functional Diagram

## PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-753)

## SUGGESTED PCB LAYOUT (PL-753)

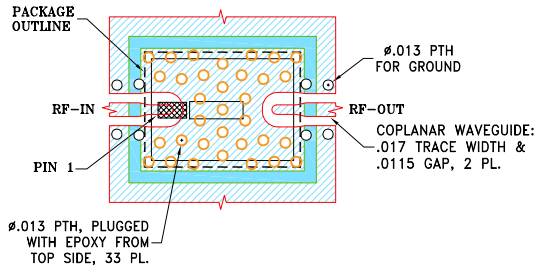


### NOTES:

- TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout BFHKL-7851+

## CASE STYLE DRAWING

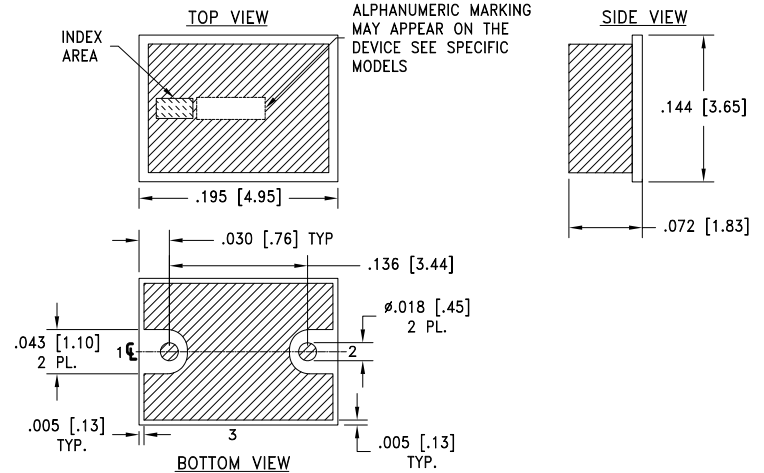

METALLIZATION

Weight: .135 grams.

Dimensions are in inches [mm]. Tolerances: 2 PL. ±.01; 3 PL. ±.005

## PRODUCT MARKING\*: F477

\*Marking may contain other features or characters for internal lot control.



Mini-Circuits

LTCC SURFACE MOUNT

# Bandpass Filter

**BFHKI-7851+**

50Ω 6.7 to 8.6 GHz

ADDITIONAL DETAILED INFORMATION IS AVAILABLE ON OUR DASHBOARD.

[CLICK HERE](#)

Performance Data & Graphs	Data Graphs S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	NM3237 Finish: Gold over Nickel Plating
RoHS Status	Compliant
Tape and Reel	TR-F77
Suggested Layout for PCB Design	PL-753
Evaluation Board	TB-BFHKI-7851C+ Gerber File
Environmental Rating	ENV06T12

## NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)






# LTCC Bandpass Filter

## BFHKL-7851+

### Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
100	98.34	0.05
1000	79.83	0.14
2000	74.89	0.07
3000	75.82	0.07
4000	88.03	0.17
4600	74.60	0.24
5000	70.48	0.31
5500	60.09	0.42
6000	40.18	0.61
6500	5.71	6.25
6800	2.18	19.34
7000	2.07	16.92
7500	2.03	18.10
8000	2.25	18.78
8600	2.85	24.86
9000	4.05	25.00
9500	28.06	2.47
10000	60.98	0.96
10500	72.19	0.65
10900	74.72	0.58
11000	77.53	0.58
11500	74.79	0.55
12000	64.00	0.56
12500	57.90	0.57
13000	54.64	0.56
13500	52.90	0.47
14000	52.62	0.38
14500	53.88	0.36
15000	55.12	0.36
15500	55.94	0.37
16000	57.81	0.32
16500	64.49	0.20
17000	61.14	0.12
17500	55.64	0.14
18000	52.65	0.35
18500	48.76	0.67

## Typical Performance Data

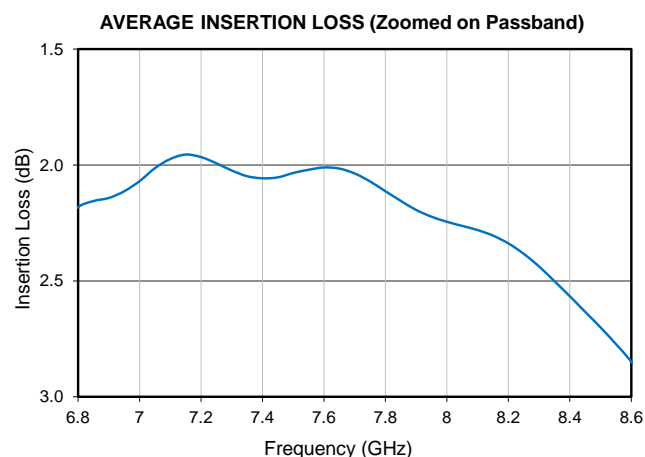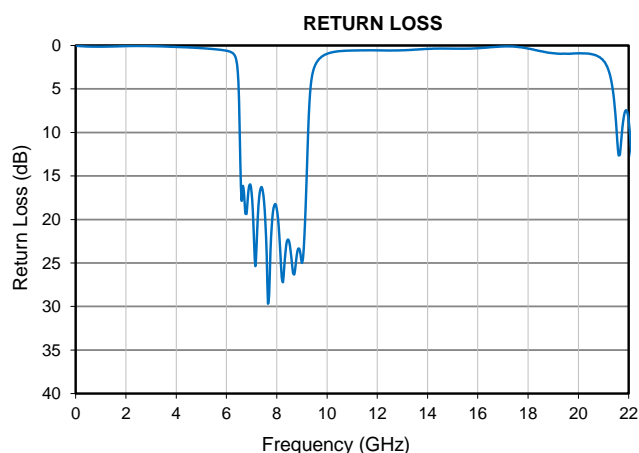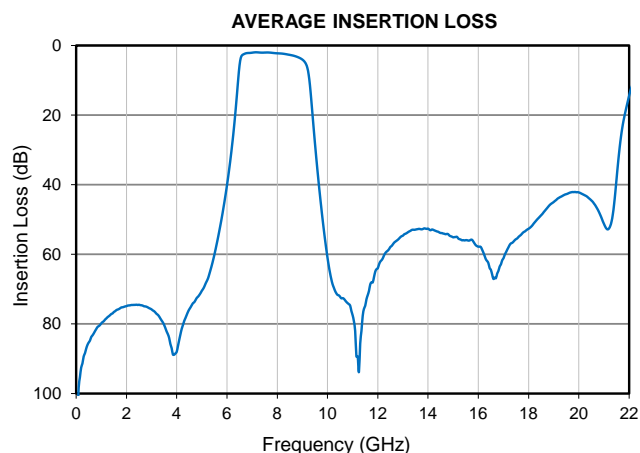

## Outline Dimensions

NM3237

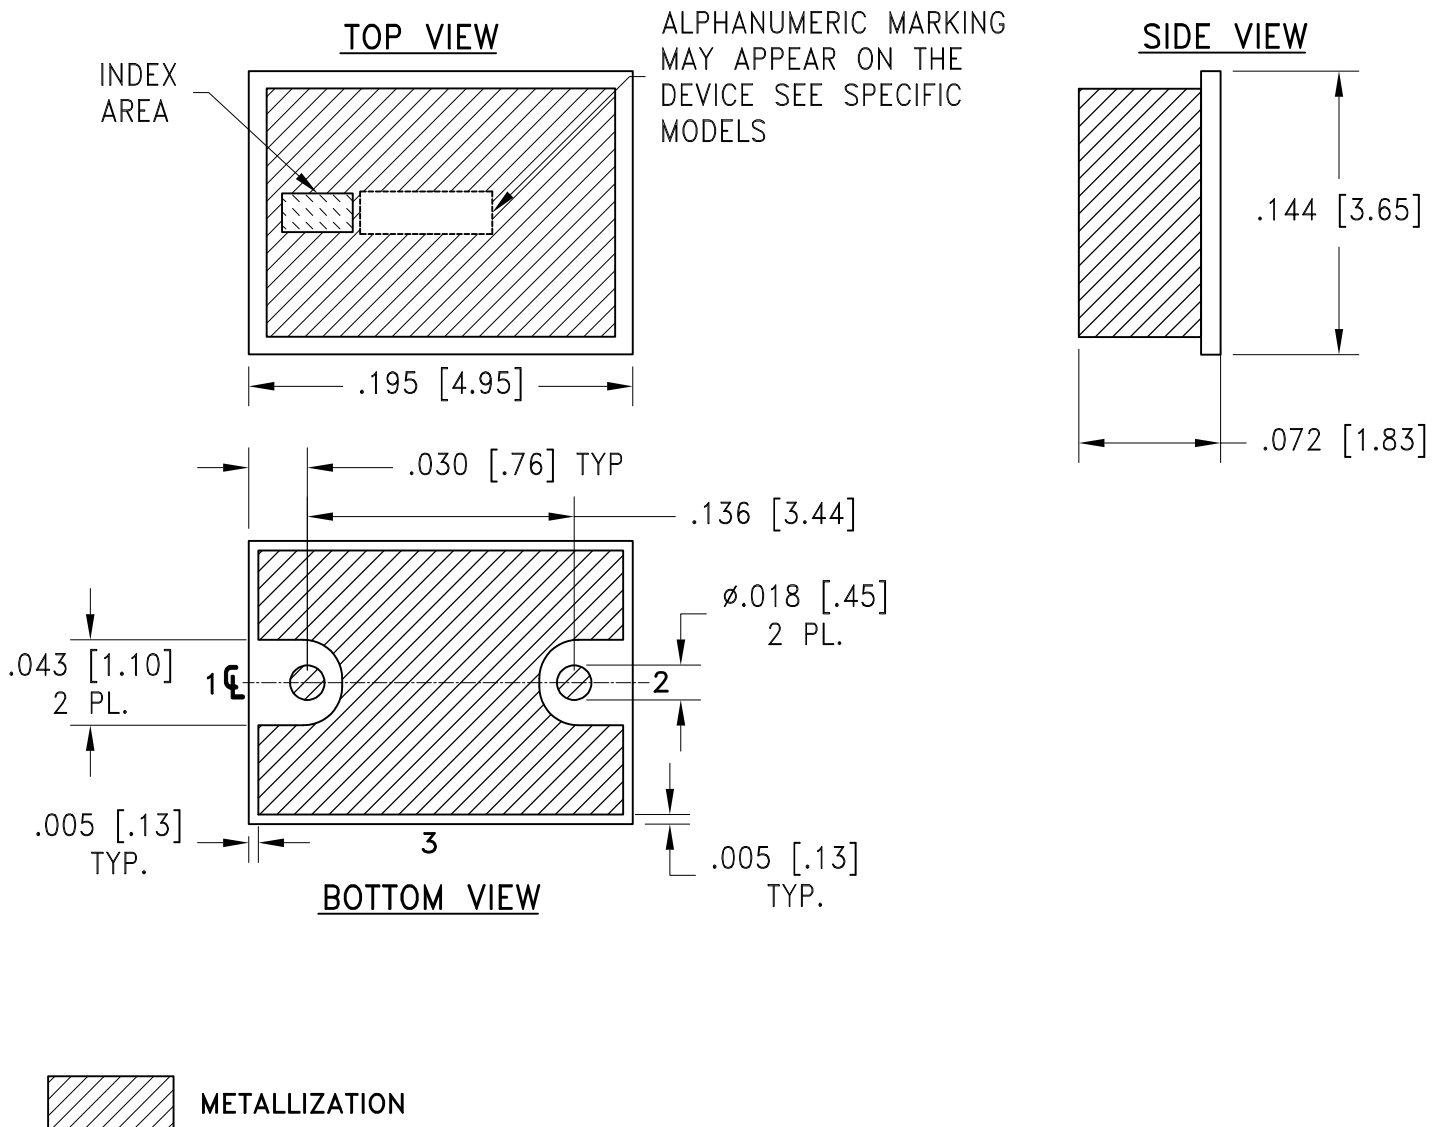

Weight: .135 grams.

Dimensions are in inches (mm). Tolerances: 2 Pl. ±.01; 3 Pl. ±.005

### Notes:

1. Case material: LTCC on printed circuit board base.
2. Termination Finish: **as shown below or indicated on Data Sheet.**  
For RoHS Case Styles: Gold Plate over Nickel plate. All models, (+) suffix.



INTERNET <http://www.minicircuits.com>


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified




## THIRD ANGLE PROJECTION

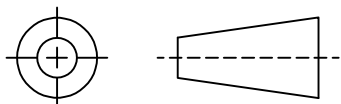

## REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	ECO-017025	NEW RELEASE	03/30/23	ITG	IL
OR1	ECO-018201	CORRECTED TYPO IN NOTE 2	06/16/23	ITG	IL
A	ECO-020890	ADDED DETAIL "A" (SH.2) & DIMENSIONS	02/16/24	ITG	IL


SUGGESTED MOUNTING CONFIGURATION FOR  
NM3237 CASE STYLE

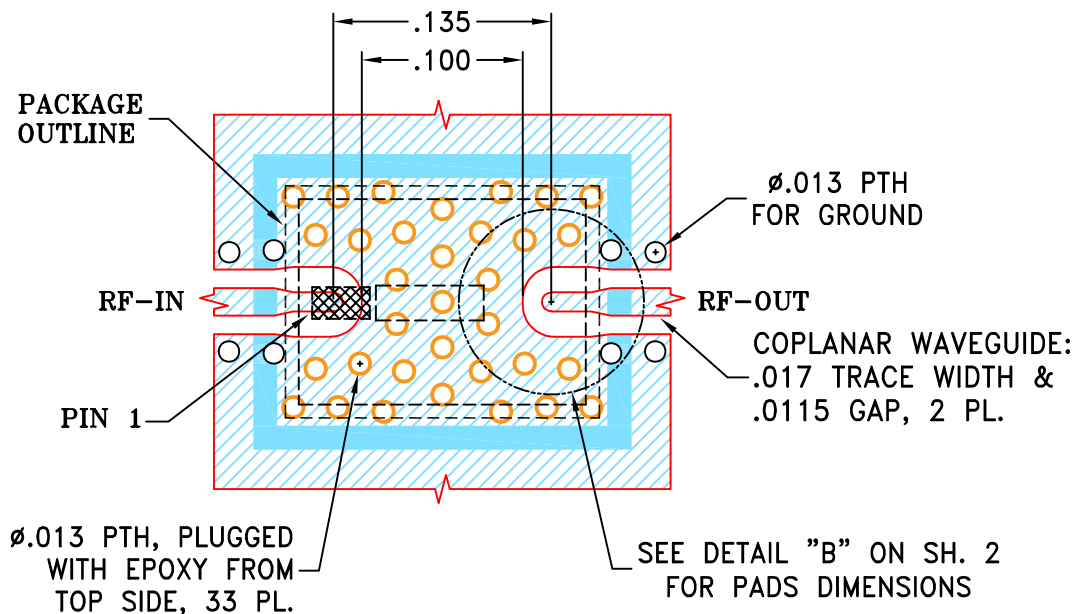**NOTES:**

- TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010"; COPPER: 1/2 OZ.  
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB ARE CONTINUOUS GROUND PLANE.



DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)



DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:  
2 PL DECIMALS ±  
3 PL DECIMALS ± .005  
ANGLES ±  
FRACTIONS ±



Mini-Circuits®

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA1.DWG REV:A DATE:01/12/95

DATE

INITIALS

DRAWN

ITG

03/30/23

CHECKED

GF

03/30/23

APPROVED

IL

03/30/23



Mini-Circuits®

13 Neptune Avenue  
Brooklyn NY 11235

PL, NM3237, TB-1200

SIZE

A

CODE IDENT

15542

DRAWING NO:

98-PL-753

REV:

A

FILE:


98PL753

SCALE:


8:1

SHEET:

1 OF 2

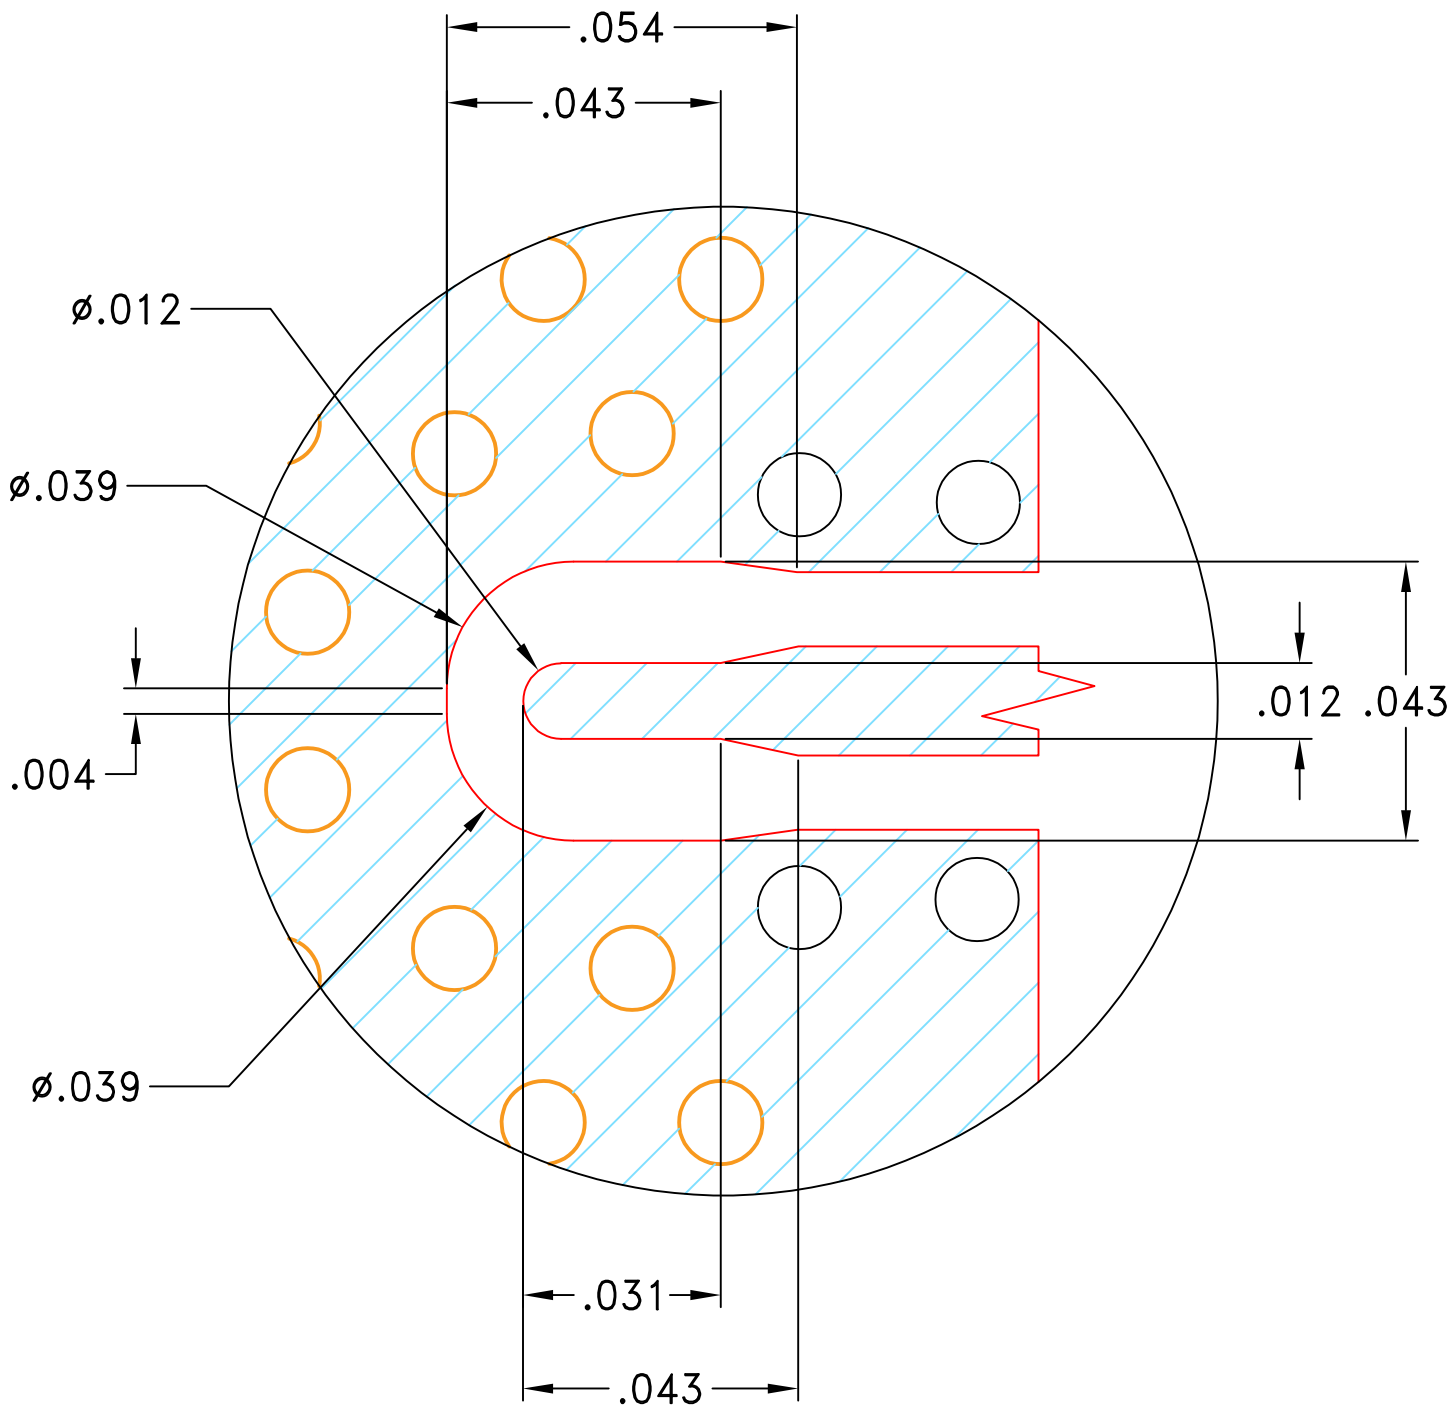

DETAIL "A". SOLDER MASK IS NOT SHOWN FOR CLARITY  
(SCALE 4:1)




THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

ASHEETA2.DWG REV:A DATE: 01/12/94


ALL DIMENSIONS ARE IN INCHES EXCEPT OTHERWISE SPECIFIED

SIZE	CODE IDENT	DRAWING NO:	REV:
A	15542	98-PL-753	A
FILE:	98PL753	SCALE:	SHEET: 2 OF 2

# Evaluation Board and Circuit

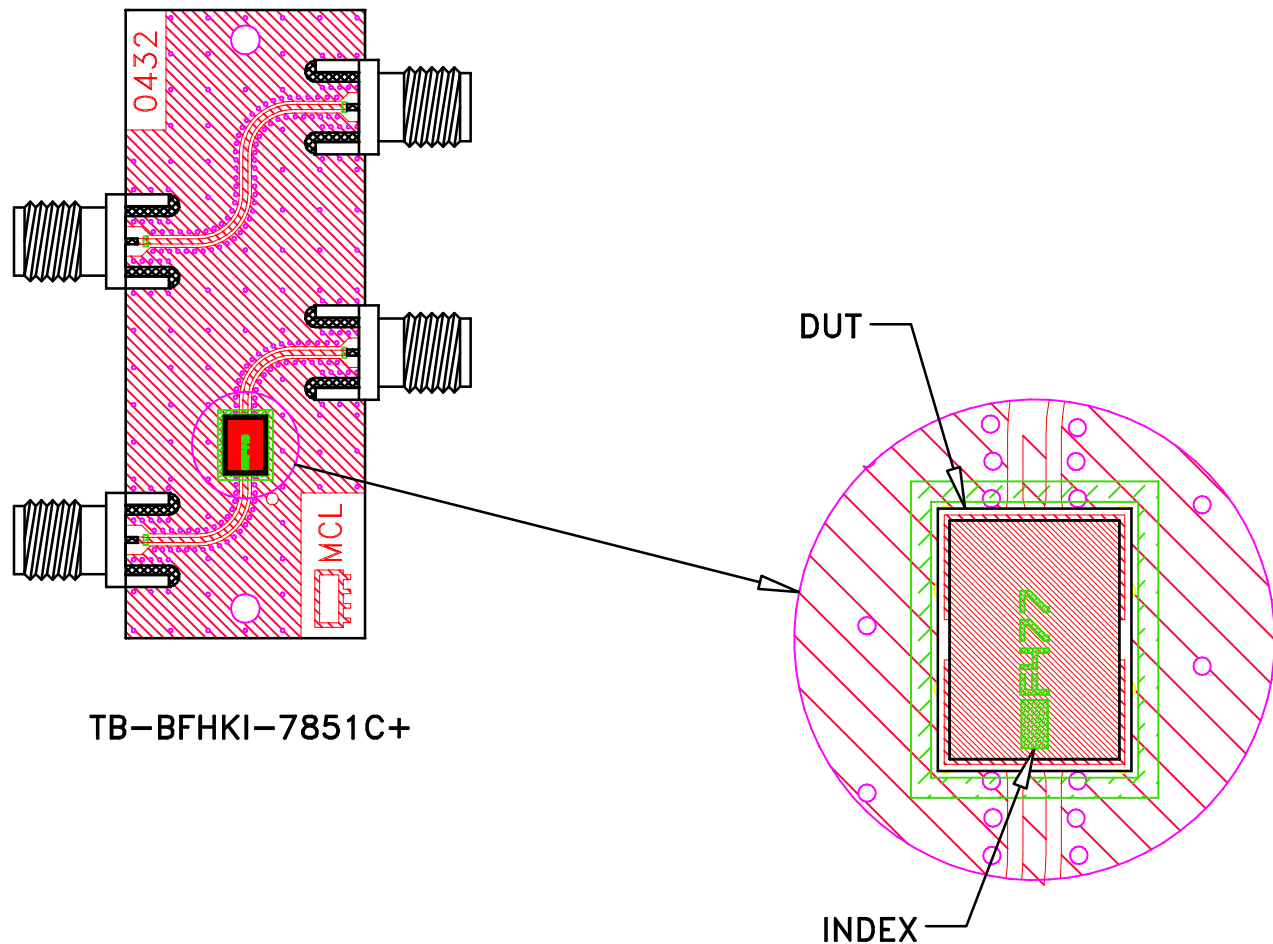

TB-BFHKI-7851C+

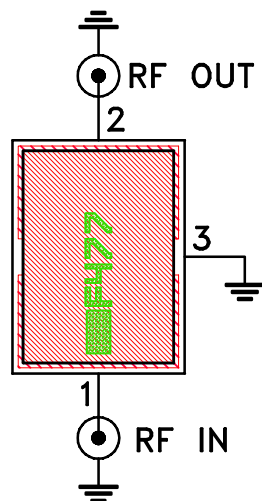

Schematic Diagram

## Notes:

1. SMA Female connectors.
2. PCB Material: Rogers R04350 or equivalent,  
Dielectric Constant=3.5, Thickness=.010 inch.

 Mini-Circuits®



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 125° C Ambient Environment	Individual Model Data Sheet
Thermal Cycling	-55 to 125°C, 100 cycles, Dwell Time 15 minutes.	MIL-STD-202, Method 107, Condition A-3
Humidity	85°C, 90-95% Relative Humidity, 250hours	
Solderability	10X / 30X Magnification	J-STD-002C Test S, J-STD-002C Test S1
High Temp Storage	125°C, 250 hours	
Bend Test	1mm, deflection for 5 seconds Span of bending: 2.75"	--