

# LTCC Coupler

50Ω 2400 to 2500 MHz 6dB Coupling

## CPJC-6-252R+



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature*	-40°C to 85°C

\*Refer to product storage temperature after installation.  
Suggestion for T&R unused product storage condition: +5--+35°C, Humidity 45-75%RH, 12 Month max.  
Permanent damage may occur if any of these limits are exceeded.

### Pad Connections

Input	1
GND	2
Coupled	3
Termination	4
GND	5
Output	6

### Outline Drawing

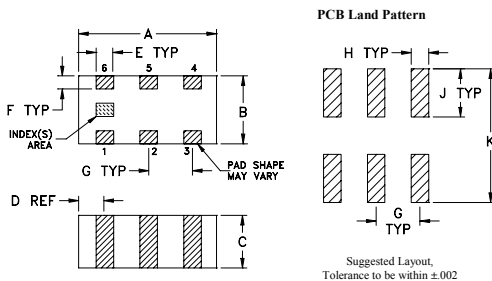


### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15

G	H	J	K	wt
.020	.010	.022	.053	grams
0.51	0.25	0.56	1.35	0.005

### Evaluation Board MCL P/N: TB-1031+ Suggested PCB Layout (PL-572)

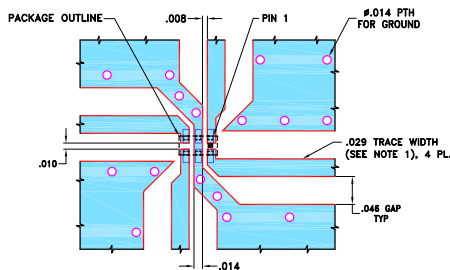

#### NOTES:

- TRACE WIDTH & GAP ARE SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS .016±.0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- REFER TO MODEL DATASHEET FOR PIN OUTS.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

### Features

- miniature size 0603
- low cost
- aqueous washable

### Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee




### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		2400		2500	MHz
<b>Mainline Loss</b>	2400 - 2500	—	1.27	1.83	dB
<b>Coupling</b>	2400 - 2500	—	6.5±1.0	—	dB
<b>Directivity</b>	2400 - 2500	13.5	18	—	dB
<b>Return Loss (Input)</b>	2400 - 2500	13.9	21	—	dB
<b>Return Loss (Output)</b>	2400 - 2500	13.9	21	—	dB
<b>Input Power<sup>1</sup></b>	2400 - 2500	—	—	2	W


1. Derate linearly to 1W at 85°C.

### Typical Performance Data

Frequency (GHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
2.400	1.20	6.70	18.45	24.38	22.52	13.91
2.411	1.21	6.67	18.53	24.46	22.52	13.97
2.420	1.22	6.64	18.59	24.59	22.56	14.02
2.432	1.23	6.61	18.63	24.70	22.58	14.09
2.441	1.23	6.58	18.72	24.82	22.67	14.14
2.450	1.24	6.56	18.77	24.85	22.70	14.20
2.461	1.25	6.53	18.84	24.93	22.78	14.25
2.470	1.26	6.51	18.89	25.03	22.80	14.31
2.482	1.27	6.48	18.99	25.13	22.87	14.38
2.491	1.27	6.45	19.04	25.22	22.91	14.41
2.500	1.28	6.43	19.08	25.26	22.92	14.45

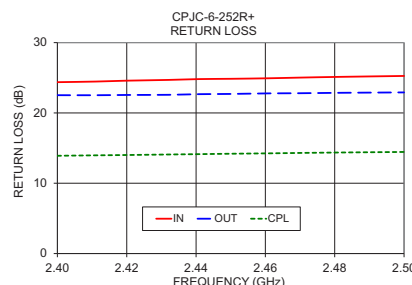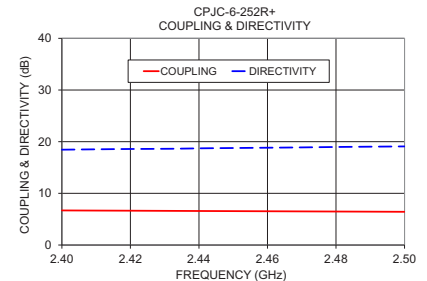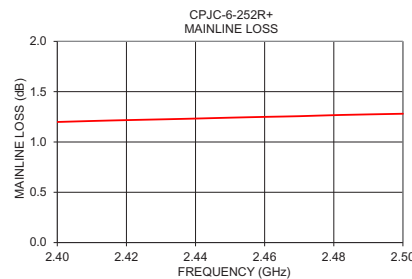

### Electrical Schematic

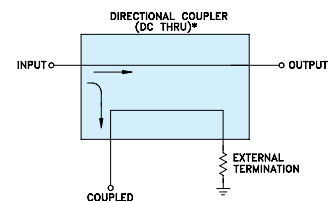

\* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

**Mini-Circuits®**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. A  
ECO-005220  
CPJC-6-252R+  
SL/CP/AM  
201203  
Page 1 of 1

## Typical Performance Data


FREQ. (MHz)	INSERTION LOSS (dB)	COUPLING (dB)	DIRECTIVITY (dB)	RETURN LOSS (dB)		
				IN	OUT	CPL
2400	1.20	6.70	18.45	24.38	22.52	13.91
2402	1.20	6.69	18.46	24.40	22.50	13.92
2405	1.20	6.68	18.48	24.46	22.52	13.93
2408	1.21	6.67	18.50	24.44	22.52	13.95
2411	1.21	6.67	18.53	24.46	22.52	13.97
2414	1.21	6.66	18.52	24.52	22.54	13.98
2417	1.21	6.65	18.57	24.54	22.53	14.00
2420	1.22	6.64	18.59	24.59	22.56	14.02
2423	1.22	6.63	18.60	24.62	22.56	14.03
2426	1.22	6.63	18.60	24.64	22.57	14.06
2429	1.22	6.62	18.64	24.65	22.58	14.08
2432	1.23	6.61	18.63	24.70	22.58	14.09
2435	1.23	6.60	18.67	24.72	22.62	14.10
2438	1.23	6.59	18.72	24.74	22.63	14.13
2441	1.23	6.58	18.72	24.82	22.67	14.14
2444	1.24	6.58	18.75	24.81	22.68	14.16
2447	1.24	6.57	18.77	24.84	22.68	14.19
2450	1.24	6.56	18.77	24.85	22.70	14.20
2452	1.24	6.56	18.80	24.88	22.71	14.21
2455	1.25	6.55	18.79	24.90	22.76	14.22
2458	1.25	6.54	18.83	24.90	22.78	14.24
2461	1.25	6.53	18.84	24.93	22.78	14.25
2464	1.25	6.52	18.88	24.97	22.78	14.28
2467	1.26	6.52	18.87	25.02	22.80	14.29
2470	1.26	6.51	18.89	25.03	22.80	14.31
2473	1.26	6.50	18.94	25.07	22.83	14.32
2476	1.26	6.49	18.93	25.09	22.84	14.33
2479	1.26	6.48	18.98	25.14	22.87	14.35
2482	1.27	6.48	18.99	25.13	22.87	14.38
2485	1.27	6.47	18.98	25.21	22.87	14.38
2488	1.27	6.46	19.04	25.18	22.89	14.40
2491	1.27	6.45	19.04	25.22	22.91	14.41
2494	1.28	6.45	19.06	25.22	22.91	14.43
2497	1.28	6.44	19.08	25.25	22.93	14.44
2500	1.28	6.43	19.08	25.26	22.92	14.45

## Typical Performance Curves


Insertion Loss

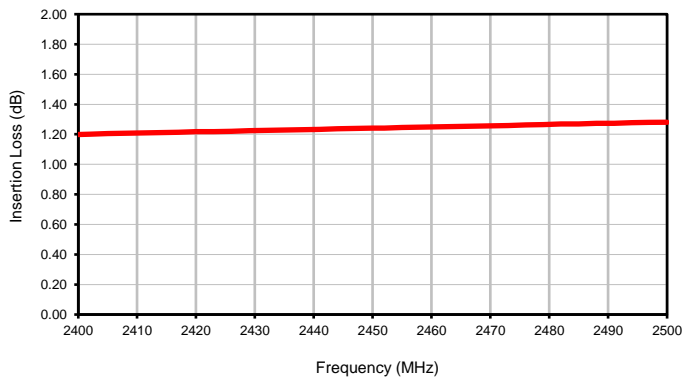


Coupling

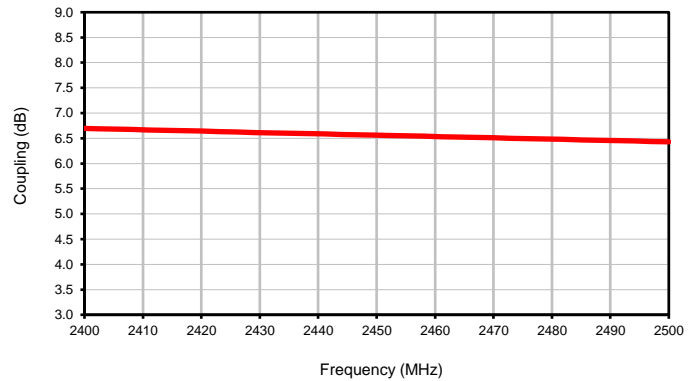

Directivity

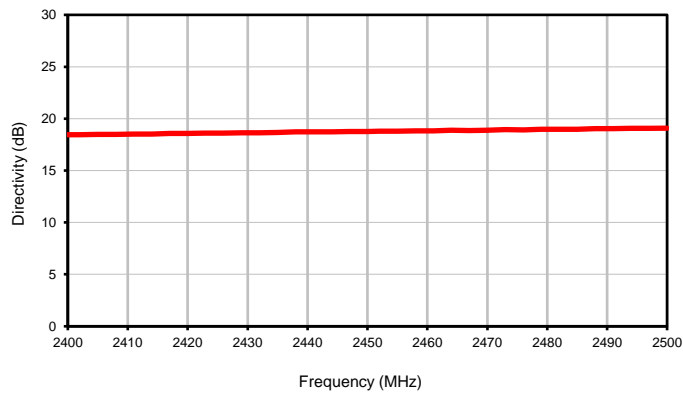


Return Loss

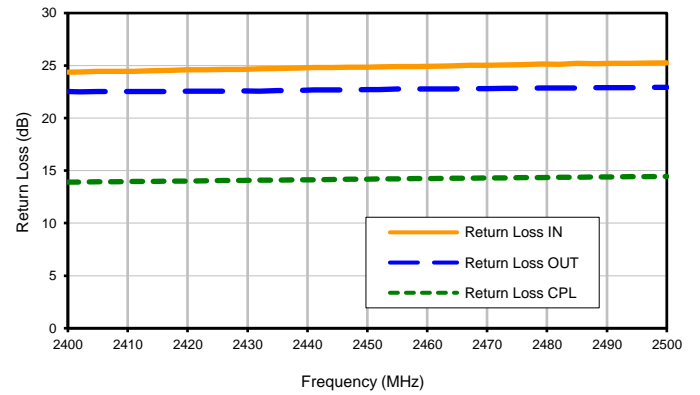


## Outline Dimensions

JC0603C

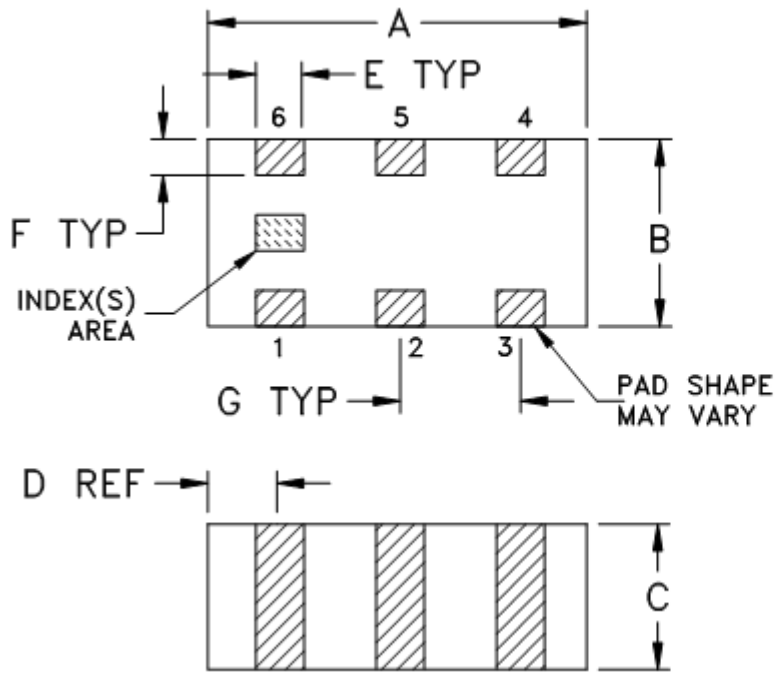

## PCB Land Pattern

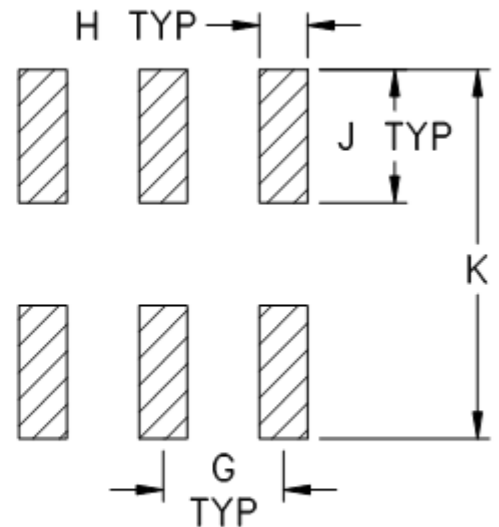

Suggested Layout,  
Tolerance to be within  $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
JC0603C	.063 (1.60)	.031 (0.80)	.024 (0.60)	.012 (0.30)	.008 (0.20)	.006 (0.15)	.020 (0.50)	.010 (0.25)	.022 (0.55)	0.053 (1.35)	.005

Dimensions are in inches (mm). Tolerances: 2 Pl.  $\pm .01$ ; 3 Pl.  $\pm .005$

### Notes:

1. Open style, ceramic base.
2. Termination finish:  
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

RF/IF MICROWAVE COMPONENTS

# Tape & Reel Packaging TR-F114

## DEVICE ORIENTATION IN T&R

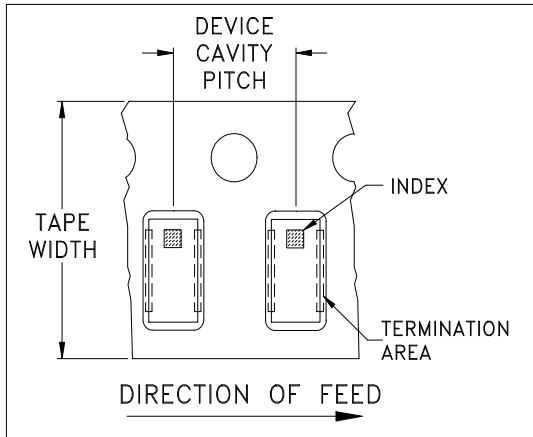


ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

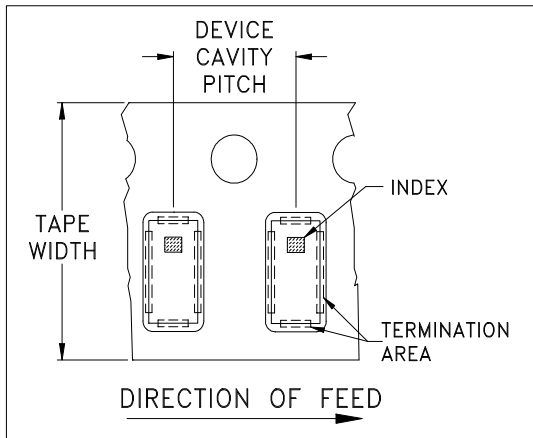


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	JV1210C-1
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: [www.minicircuits.com/pages/pdfs/tape.pdf](http://www.minicircuits.com/pages/pdfs/tape.pdf)




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION

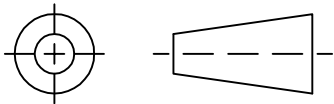

REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M168200	NEW RELEASE	05/31/18	NP	SL

**SUGGESTED MOUNTING CONFIGURATION  
FOR JC0603C CASE STYLE, "06DC12" PIN CODE**

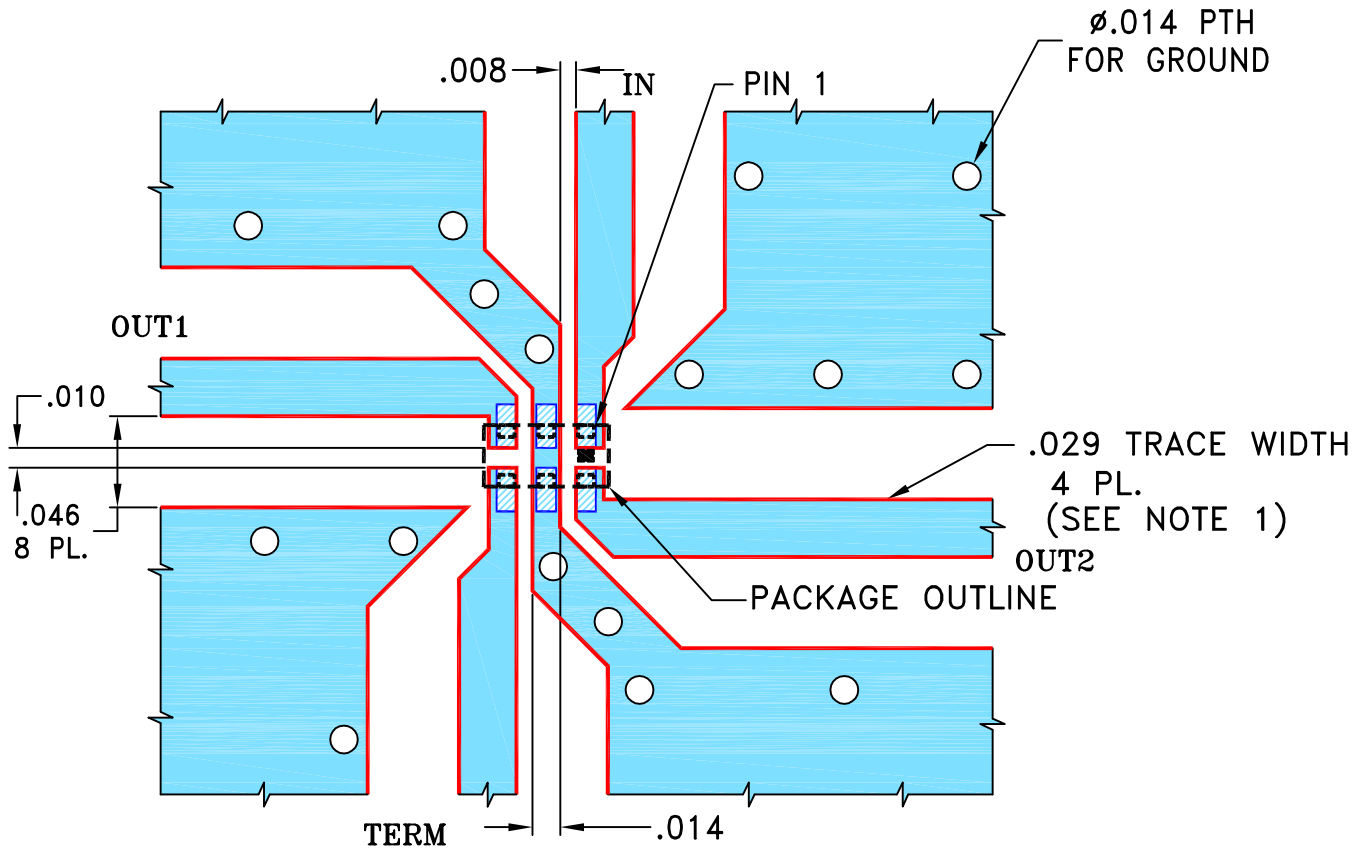

**NOTES:**

1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS  $.016 \pm .0015$ . COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS	DATE
DRAWN	NP	05/30/18
CHECKED	GF	05/30/18
APPROVED	SL	05/31/18



**Mini-Circuits®** 13 Neptune Avenue  
Brooklyn NY 11235

**PL, 06DC12, JC0603C, TB-1031+**

SIZE A	CODE IDENT 15542	DRAWING NO: 98-PL-572	REV: OR
FILE:	98PL572	SCALE: 10:1	SHEET: 1 OF 1

**Mini-Circuits®**  
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.  
ASHEETA1.DWG REV:A DATE:01/12/95


# Evaluation Board and Circuit

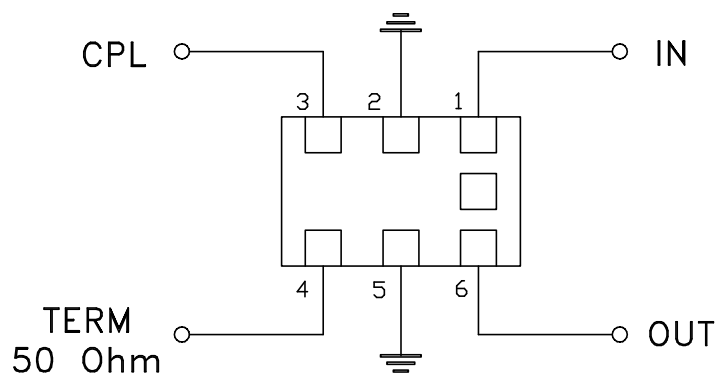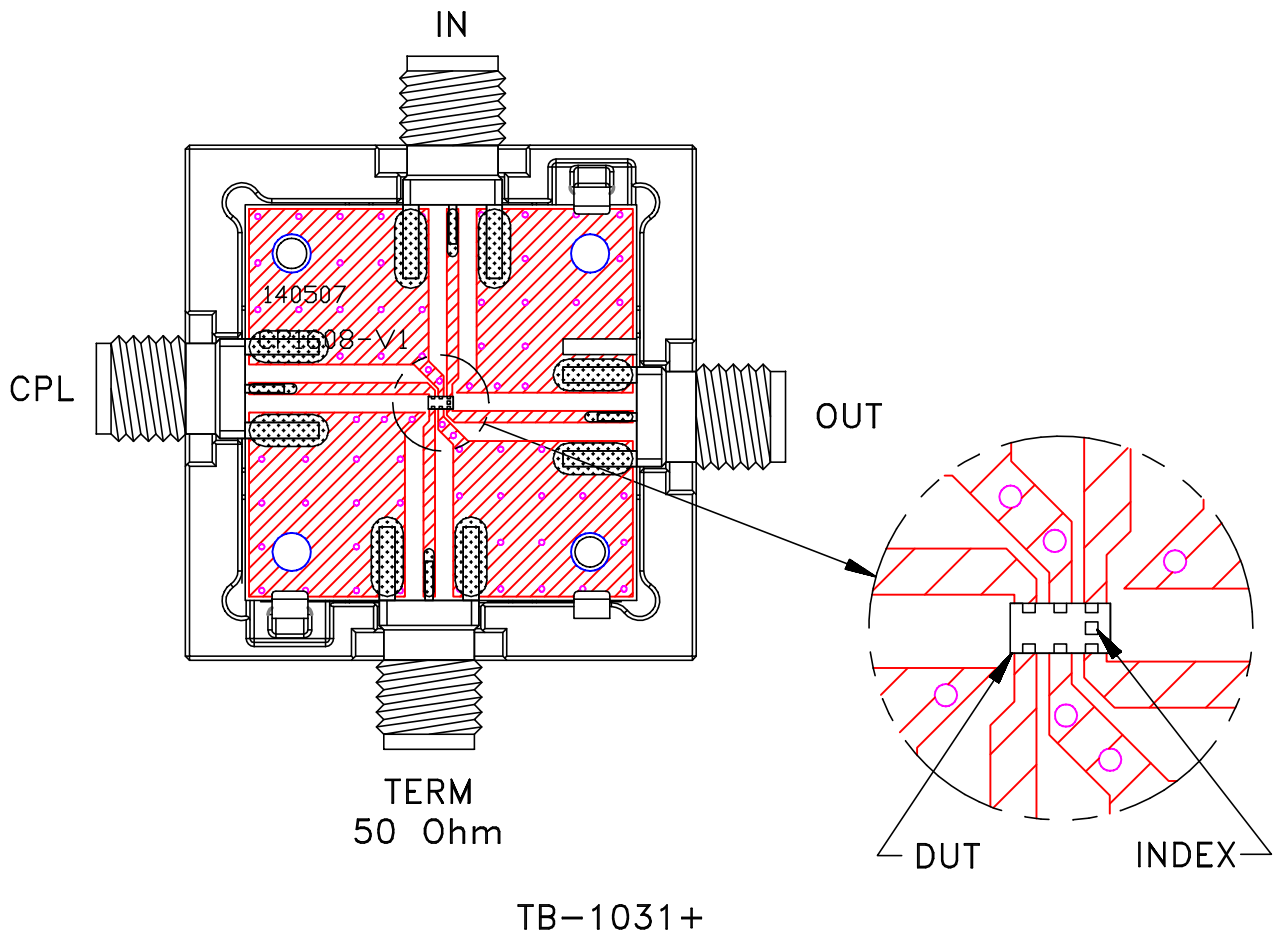

Schematic Diagram

## Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: FR4 or equivalent,  
Dielectric Constant=4.5, Thickness=.016 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-40° to 85° C Ambient Environment	Individual Model Data Sheet
Thermal Shock	-40° to 125°C, 100 cycles	MIL-STD-202 Method 107, Condition A-3 except -40°C instead of -55° C and +125° C instead of -85° C
Solder Reflow Heat	Pb-Free Process 245° -250°C peak,	J-STD-020, 4-2 and 5-2,Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Shelf Life	Shelf life is 12 months when kept in sealed bags. Unused parts are to be resealed to preseve shelf life for proper solderability.	